



HOSHIZAKI

All Hoshizaki Co., Ltd factories are
ISO9001 and **ISO14001** registered

ISO9001

Hoshizaki Co., Ltd Factories

Registration Number JET-0205
Registration Date 9th August 1999

ISO14001

Hoshizaki Co., Ltd Factories

Registration Number E01-204
Registration Date 25th July 2001



The Hoshizaki Group is actively working
to preserve the Environment or solve
social issue through its Business.

Scan for
more details



HOSHIZAKI

HOSHIZAKI VIETNAM CORPORATION

168/14 Nguyen Gia Tri Street, Ward 25,
Binh Thanh District, Ho Chi Minh City, 760000 Vietnam
Tel +84 0 916 161 346 <https://hoshizaki-sea.com/>

Scan for
more details



FOR YOUR KITCHEN



WHAT'S

4 ABOUT



5 ICE MAKER

- 6-9** Cube Ice
- 9-11** Crescent Ice
- 11-12** Nugget / Flake Ice
- 13-14** Dice / Half Dice Ice
- 14** Special Ice



15 ICE STORAGE BIN

- 15** Ice Storage Bin Compatability & Specifications
- 16** Ice Dispenser
- 17-18** Ice Maker Specifications



19 REFRIGERATION

- 20-22** A-Fit Upright Model
- 22** A-Fit Upright Specifications
- 23-28** A-Fit Undercounter Model
- 29** A-Fit Undercounter Specifications
- 30-31** A-Fit Pillar-less Model
- 32** A-Fit Pillar-less Specifications
- 33-36** A-Fit Glass Model
- 37** A-Fit Prep Table Model
- 38** A-Fit Glass Specifications
- 38** A-Fit Prep Table Specifications
- 39-40** A-Fit Model
- 41** A-Fit Bakery Specifications
- 41-45** A1-Fit Model
- 45-46** A1-Fit Model Specifications
- 46-48** Goldline Model
- 47** Goldline Specifications



49 DEEP FREEZER

- 49** Deep Freezer Specifications
- 50 -51** Sushi Showcase
- 51** Sushi Showcase Specifications



52 DISHWASHER

- 53** Dishwasher Specifications
- 54** Beer Dispenser
- 54** Beer Dispenser Specifications
- 55** Electric Fryer
- 55** Electric Fryer Specifications

INSIDE?



Hoshizaki is a global leading manufacturer of commercial equipment for food and beverage services that was founded in Nagoya, Japan in 1947, and began operations in Toyoake factory in 1956.

We have continually manufactured and offered a wide variety of high-quality products, in order to meet changing needs and demands, since Hoshizaki's establishment. In particular, we provide equipment, such as ice machines, commercial refrigeration, beverage dispensers, and dishwashers.

Hoshizaki has a comprehensive global network with its manufacturing plants in the United States, the United Kingdom, Denmark, Turkey, Mexico, China, India, Australia, and Brazil. We also have sales and after-sales service teams globally, and our products that incorporate creativity and innovation are highly valued, supporting various dining scenes for worldwide customers.




ICE MAKER


Together with the vision to prioritize the customer satisfaction, Hoshizaki has invented the original technology for the Basic Designs of Evaporators. As the result, some Hoshizaki Ice Machine products use the **Stainless Steel Evaporator** which produce the best quality ice that is already proven melt very slowly (up to 24 hours time) compared to any other ice produced by different ice machines brand.



CUBE STANDARD IM-30/45CA




CUBE 25 IM-30CA-25




MODEL	IM-30CA	IM-30CA-25	IM-45CA
Dimension WxDxH (+ Leg)	398 x 510 x 695 (+150) mm	398 x 510 x 695 (+150) mm	660 x 570 x 695 (+150) mm
Electrical Consumption	250 W	250 W	310 W
Ice Production Per 24h (approx.)	28 kg (AT21°C / WT15°C) 25 kg (AT32°C / WT21°C)	28 kg (AT21°C / WT15°C) 25 kg (AT32°C / WT21°C)	44 kg (AT21°C / WT15°C) 38 kg (AT32°C / WT21°C)
Ice Production Per Cycle (approx.)	0.4 kg / 18 pcs	0.27 kg / 21 pcs	0.67 kg / 30 pcs
Storage Capacity (approx.)	12 kg	12 kg	15 kg

CUBE STANDARD IM-65A




CUBE 25 IM-45CA/65A-25




MODEL	IM-45CA-25	IM-65A	IM-65A-25
Dimension WxDxH (+ Leg)	660 x 570 x 695 (+150) mm	660 x 570 x 800 (+150) mm	660 x 570 x 800 (+150) mm
Electrical Consumption	310 W	390 W	390 W
Ice Production Per 24h (approx.)	45 kg (AT21°C / WT15°C) 41 kg (AT32°C / WT21°C)	62 kg (AT21°C / WT15°C) 49 kg (AT32°C / WT21°C)	56 kg (AT21°C / WT15°C) 46 kg (AT32°C / WT21°C)
Ice Production Per Cycle (approx.)	0.55 kg / 42 pcs	0.94 kg / 42 pcs	0.72 kg / 56 pcs
Storage Capacity (approx.)	15 kg	26 kg	26 kg

CUBE STANDARD IM-100A




CUBE 23 IM-100A-23




MODEL	IM-100A	IM-100A-23
Dimension WxDxH (+ Leg)	660 x 570 x 1200 (+150) mm	660 x 570 x 1200 (+150) mm
Electrical Consumption	680 W	680 W
Ice Production Per 24h (approx.)	108 kg (AT21°C / WT15°C) 88 kg (AT32°C / WT21°C)	92 kg (AT21°C / WT15°C) 78 kg (AT32°C / WT21°C)
Ice Production Per Cycle (approx.)	1.8 kg / 80 pcs	1.3 kg / 80 pcs
Storage Capacity (approx.)	52 kg	52 kg

CUBE STANDARD IM-100CNE/130A




CUBE 21 IM-130A-21/220AA-21




MODEL	IM-100CNE	IM-130A	IM-130A-21
Dimension WxDxH	1004 x 600 x 700 (+90) mm	660 x 570 x 1200 (+150) mm	660 x 570 x 1200 (+150) mm
Electrical Consumption	630 W	630 W	660 W
Ice Production Per 24h (approx.)	93 kg (AT21°C / WT15°C) 84 kg (AT32°C / WT21°C)	125 kg (AT21°C / WT15°C) 100 kg (AT32°C / WT21°C)	100 kg (AT21°C / WT15°C) 75 kg (AT32°C / WT21°C)
Ice Production Per Cycle (approx.)	1.8 kg / 80 pcs	1.8 kg / 80 pcs	1.15 kg / 190 pcs
Storage Capacity (approx.)	38 kg	52 kg	52 kg

CUBE STANDARD IM-220AA




CUBE 23 IM-130A-23




MODEL	IM-130A-23	IM-220AA-B-301SA	IM-220AA-21-B-301SA
Dimension WxDxH	660 x 570 x 1200(+150) mm	560 x 820 x 1796(+90)mm	560 x 820 x 1796(+90)mm
Electrical Consumption	660 W	950 W	950 W
Ice Production Per 24h (approx.)	102 kg (AT21°C / WT15°C) 88 kg (AT32°C / WT21°C)	200 kg (AT21°C / WT15°C) 175 kg (AT32°C / WT21°C)	160 kg (AT21°C / WT15°C) 155 kg (AT32°C / WT21°C)
Ice Production Per Cycle (approx.)	1.3 kg / 80 pcs	3.2 kg / 140 pcs	2.1kg / 360pcs
Storage Capacity (approx.)	52 kg	144k kg	144k kg

CUBE STANDARD IM-240NE / 240ANE




CUBE 23 IM-220AA-23




MODEL	IM-220AA-23-B-301SA	IM-240NE	IM-240ANE-B-301SA
Dimension WxDxH (+ Leg)	560 x 820 x 1796 (+90) mm	704 x 665 x 1510 (+90) mm	560 x 820 x 1901(+90) mm
Electrical Consumption	950 W	1320 W	1320 W
Ice Production Per 24h (approx.)	170 kg (AT21°C / WT15°C) 155 kg (AT32°C / WT21°C)	220 kg (AT21°C / WT15°C) 190 kg (AT32°C / WT21°C)	230 kg (AT21°C / WT15°C) 190 kg (AT32°C / WT21°C)
Ice Production Per Cycle (approx.)	2.38 kg / 140 pcs	3.2 kg / 140 pcs	3.2 kg / 140 pcs
Storage Capacity (approx.)	144 kg	110 kg	144 kg

CUBE STANDARD IM-240DNE




CUBE 21 IM-240ANE-21




MODEL	IM-240ANE-21-B-301SA	IM-240ANE-23-B-301SA	IM-240DNE-B-801SA
Dimension WxDxH (+ Leg)	560 x 820 x 1901(+90) mm	560 x 820 x 1901(+90) mm	1219 x 820 x 1521 (+90) mm
Electrical Consumption	1320 W	1320 W	1330 W
Ice Production Per 24h (approx.)	210 kg (AT21°C / WT15°C) 190 kg (AT32°C / WT21°C)	215 kg (AT21°C / WT15°C) 195 kg (AT32°C / WT21°C)	220 kg (AT21°C / WT15°C) 200 kg (AT32°C / WT21°C)
Ice Production Per Cycle (approx.)	2.1 kg / 360 pcs	2.38 kg / 140 pcs	3.2 kg / 140 pcs
Storage Capacity (approx.)	144 kg	144 kg	348 kg

CUBE 23 IM-240ANE-23/240DNE-23 /440AA-23




CUBE 32 IM-240DNE-32




MODEL	IM-240DNE-23-B-801SA	IM-240DNE-32-B-801SA	IM-240DNE-STCR
Dimension WxDxH (+ Leg)	1219 x 820 x 1521 (+90) mm	1219 x 820 x 1521 (+90) mm	1084 x 710 x 1657 (+150) mm
Electrical Consumption	1330 W	1330 W	IM-240DNE: 1330W P-200CR4: 258W
Ice Production Per 24h (approx.)	215 kg (AT21°C / WT15°C) 195 kg (AT32°C / WT21°C)	210 kg (AT21°C / WT15°C) 190 kg (AT32°C / WT21°C)	220 kg (AT21°C / WT15°C) 200 kg (AT32°C / WT21°C)
Ice Production Per Cycle (approx.)	2.38 kg / 140 pcs	3.3 kg / 108 pcs	3.2 kg / 140 pcs
Storage Capacity (approx.)	348 kg	348 kg	P-200CR4(Cube): 160KG ST-200A(Crushed): 135KG

CUBE STANDARD IM-440AA




CUBE 21 IM-440AA-21




MODEL	IM-440AA-B-801SA	IM-440AA-21-B-801SA	IM-440AA-23-B-801SA
Dimension WxDxH(+Leg)	1219 x 820 x 1796 (+90) mm	1219 x 820 x 1796 (+90) mm	1219 x 820 x 1796 (+90) mm
Electrical Consumption	1900 W	1900 W	1900 W
Ice Production Per 24h (approx.)	400 kg (AT21°C / WT15°C) 350 kg (AT32°C / WT21°C)	320 kg (AT21°C / WT15°C) 310 kg (AT32°C / WT21°C)	340 kg (AT21°C / WT15°C) 310 kg (AT32°C / WT21°C)
Ice Production Per Cycle (approx.)	6.4 kg / 280 pcs	4.2 kg / 720 pcs	4.76 kg / 280pcs
Storage Capacity (approx.)	348 kg	348 kg	348 kg

CUBE STANDARD IM-480DNE




MODEL	IM-480DNE-B-801SA	IM-480DNE-STCR	IM-480DNE-STCRN
Dimension WxDxH(+Leg)	1219 x 820 x 2006 (+90) mm	1084 x 710 x 2142 (+150) mm	1084 x 710 x 2527 (+150) mm
Electrical Consumption	2660 W	IM-480DNE: 2660W P-200CR4: 258W	IM-480DNE: 2660W P-200CR4: 258W
Ice Production Per 24h (approx.)	460 kg (AT21°C / WT15°C) 420 kg (AT32°C / WT21°C)	460 kg (AT21°C / WT15°C) 420 kg (AT32°C / WT21°C)	460 kg (AT21°C / WT15°C) 420 kg (AT32°C / WT21°C)
Ice Production Per Cycle (approx.)	6.4 kg / 280 pcs	6.4 kg / 280 pcs	6.4 kg / 280 pcs
Storage Capacity (approx.)	348 kg	P-200CR4(Cube): 160 kg ST-200A(Crushed): 135 kg	P-200CR4(Cube): 255 kg ST-200A(Crushed): 135 kg

CRESCENT



MODEL	KM-40C	KM-60C	KM-80C
Dimension WxDxH(+Leg)	452 x 610 x 838 (+150) mm	605 x 610 x 838 (+150) mm	605 x 712 x 838 (+150) mm
Electrical Consumption	250 W	305 W	405 W
Ice Production Per 24h (approx.)	41 kg (AT21°C / WT15°C) 33 kg (AT32°C / WT21°C)	56 kg (AT21°C / WT15°C) 45 kg (AT32°C / WT21°C)	74 kg (AT21°C / WT15°C) 57 kg (AT32°C / WT21°C)
Ice Production Per Cycle (approx.)	0.74 kg / 80 pcs	1.00 kg / 110 pcs	1.16 kg / 130 pcs
Storage Capacity (approx.)	16 kg	23 kg	34 kg


CRESCENT



MODEL	KM-130C	KM-40C-W
Dimension WxDxH(+Leg)	630 x 719 x 1194 (+150) mm	452 x 610 x 838 (+150) mm
Electrical Consumption	593 W	250 W
Ice Production Per 24h (approx.)	120 kg (AT21°C / WT15°C) 90 kg (AT32°C / WT21°C)	41 kg (AT21°C / WT15°C) 33 kg (AT32°C / WT21°C)
Ice Production Per Cycle (approx.)	1.86 kg / 208 pcs	0.74 kg / 80 pcs
Storage Capacity (approx.)	55 kg	16 kg


CRESCENT

With Fully Automated Cleaning



CRESCENT


With Fully
Automated Cleaning



MODEL	KM-60C-W	KM-80C-W	KM-130C-W
Dimension WxDxH (+Leg)	605 x 610 x 838 (+150) mm	605 x 712 x 838 (+150) mm	630 x 719 x 1194 (+150) mm
Electrical Consumption	305 W	405 W	593 W
Ice Production Per 24h (approx.)	56 kg (AT21°C / WT15°C) 45 kg (AT32°C / WT21°C)	74 kg (AT21°C / WT15°C) 57 kg (AT32°C / WT21°C)	120 kg (AT21°C / WT15°C) 90 kg (AT32°C / WT21°C)
Ice Production Per Cycle (approx.)	1.00 kg / 110 pcs	1.16 kg / 130 pcs	1.86 kg / 208 pcs
Storage Capacity (approx.)	23 kg	34 kg	55 kg

CRESCENT



With UV LED



MODEL	KM-40C-U	KM-60C-U	KM-80C-U
Dimension WxDxH (+Leg)	452 x 610 x 838 (+150) mm	605 x 610 x 838 (+150) mm	605 x 712 x 838 (+150) mm
Electrical Consumption	250 W	305 W	405 W
Ice Production Per 24h (approx.)	41 kg (AT21°C / WT15°C) 33 kg (AT32°C / WT21°C)	56 kg (AT21°C / WT15°C) 45 kg (AT32°C / WT21°C)	74 kg (AT21°C / WT15°C) 57 kg (AT32°C / WT21°C)
Ice Production Per Cycle (approx.)	0.74 kg / 80 pcs	1.00 kg / 110 pcs	1.16 kg / 130 pcs
Storage Capacity (approx.)	16 kg	23 kg	34 kg


CRESCENT

With UV LED

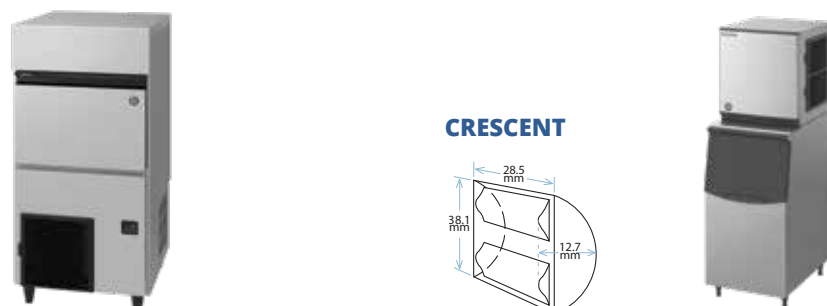


MODEL	KM-130C-U	KMD-201AB-B-301SA
Dimension WxDxH (+Leg)	630 x 719 x 1194 (+150) mm	560 x 820 x 1631(+90)mm
Electrical Consumption	593 W	663 W
Ice Production Per 24h (approx.)	120 kg (AT21°C / WT15°C) 90 kg (AT32°C / WT21°C)	175 kg (AT21°C / WT15°C) 140 kg (AT32°C / WT21°C)
Ice Production Per Cycle (approx.)	1.86 kg / 208 pcs	3.7kg / 416pcs
Storage Capacity (approx.)	55 kg	144 kg

CRESCENT



MODEL	KMD-270AB-B-301SA	KMD-400AB-B-801SA	KMD-540AB-B-801SA
Dimension WxDxH (+Leg)	560 x 820 x 1631(+90)mm	1219 x 820 x 1631(+90)mm	1219 x 820 x 1631(+90)mm
Electrical Consumption	984 W	1326 W	1968 W
Ice Production Per 24h (approx.)	255 kg (AT21°C / WT15°C) 221 kg (AT32°C / WT21°C)	350 kg (AT21°C / WT15°C) 280 kg (AT32°C / WT21°C)	510 kg (AT21°C / WT15°C) 442 kg (AT32°C / WT21°C)
Ice Production Per Cycle (approx.)	5.3kg / 572pcs	7.4kg / 832pcs	10.8kg / 1144pcs
Storage Capacity (approx.)	144 kg	348 kg	348 kg


CRESCENT



MODEL	KM-470AJ-B-501SA	KM-590DJ-B-801SA	KM-1180DJ-B-801SA
Dimension WxDxH (+Leg)	762 x 820 x 1846(+90)mm	1219 x 820 x 1846(+90)mm	1219 x 820 x 2411(+90)mm
Electrical Consumption	1850 W	2080 W	4160 W
Ice Production Per 24h (approx.)	480 kg (AT21°C / WT15°C) 380 kg (AT32°C / WT21°C)	590 kg (AT21°C / WT15°C) 500 kg (AT32°C / WT21°C)	1180 kg (AT21°C / WT15°C) 1000 kg (AT32°C / WT21°C)
Ice Production Per Cycle (approx.)	9.7kg / 960pcs	12.9kg / 1440pcs	25.8kg / 2880pcs
Storage Capacity (approx.)	217 kg	348 kg	348kg

NUGGET / FLAKE ICE

NUGGET FM-120KS-HC
Compressed Flake Ice




FLAKE FM-120KS(-50)-HC



MODEL	FM-120KS-HC	FM-120KS-HCN	FM-120KS-50-HC
Dimension WxDxH (+Leg)	640 x 640 x 711(+89)mm	640 x 600 x 711(+89)mm	940 x 600 x 711(+89)mm
Electrical Consumption	349 W	349 W	349 W
Ice Production Per 24h (approx.)	119 kg (AT21°C / WT15°C) 88 kg (AT32°C / WT21°C)	119 kg (AT21°C / WT15°C) 88 kg (AT32°C / WT21°C)	119 kg (AT21°C / WT15°C) 88 kg (AT32°C / WT21°C)
Refrigerant	R290	R290	R290
Storage Capacity (approx.)	26kg	26kg	57kg

NUGGET FM-120KE-50-HCN/FM-300AKE-N
Compressed Flake Ice




FLAKE FM-300AKE-SB



MODEL	FM-120KE-50-HCN	FM-300AKE-SB-B-301SA	FM-300AKE-N-SB-B-30SA
Dimension WxDxH (+Leg)	940 x 600 x 711(+89)mm	560 x 820 x 1801(+90)mm	560 x 820 x 1801(+90)mm
Electrical Consumption	355 W	1000 W	1000 W
Ice Production Per 24h (approx.)	96 kg (AT21°C / WT15°C) 75 kg (AT32°C / WT21°C)	260 kg (AT21°C / WT15°C) 200 kg (AT32°C / WT21°C)	225 kg (AT21°C / WT15°C) 180 kg (AT32°C / WT21°C)
Refrigerant	R290	R404A	R404A
Storage Capacity (approx.)	65 kg	144 kg	144 kg

NUGGET FM-480AKE-N
Compressed Flake Ice




FLAKE FM-480/600AKE-SB



MODEL	FM-480AKE-SB-B-301SA	FM-480AKE-N-SB-B-30SA	FM-600AKE-SB-B-301SA
Dimension WxDxH (+Leg)	560 x 820 x 1801(+90)mm	560 x 820 x 1801(+90)mm	560 x 820 x 1801(+90)mm
Electrical Consumption	1650 W	1650 W	1900 W
Ice Production Per 24h (approx.)	425 kg (AT21°C / WT15°C) 325 kg (AT32°C / WT21°C)	360 kg (AT21°C / WT15°C) 290 kg (AT32°C / WT21°C)	540 kg (AT21°C / WT15°C) 445 kg (AT32°C / WT21°C)
Refrigerant	R404A	R404A	R404A
Storage Capacity (approx.)	144kg	144kg	144kg

NUGGET FM-600/1000AKE-N
Compressed Flake Ice




FLAKE FM-1000AKE




MODEL	FM-600AKE-N-SB-B-30SA	FM-1000AKE-SB-B-501SA	FM-1000AKE-N-SB-B-501SA
Dimension WxDxH (+Leg)	560 x 820 x 1801(+90)mm	762 x 820 x 1801(+90)mm	762 x 820 x 1801(+90)mm
Electrical Consumption	1900 W	2490 W	2490 W
Ice Production Per 24h (approx.)	460 kg (AT21°C / WT15°C) 400 kg (AT32°C / WT21°C)	890 kg (AT21°C / WT15°C) 740 kg (AT32°C / WT21°C)	730 kg (AT21°C / WT15°C) 590 kg (AT32°C / WT21°C)
Refrigerant	R404A	R404A	R404A
Storage Capacity (approx.)	144kg	217kg	217kg

DICE




MODEL	SRM-45A	SRM-60A	SRM-80A
Dimension WxDxH (+ Leg)	500 x 580 x 750 mm	660 x 670 x 970 (+80) mm	660 x 670 x 970 (+80) mm
Electrical Consumption	287 W	370 W	450 W
Ice Production Per 24h (approx.)	41 kg (AT21°C / WT15°C) 35 kg (AT32°C / WT21°C)	60 kg (AT21°C / WT15°C) 50 kg (AT32°C / WT21°C)	72 kg (AT21°C / WT15°C) 57 kg (AT32°C / WT21°C)
Ice Production Per Cycle (approx.)	0.5kg / 55pcs	0.81kg / 80 pcs	0.81 kg / 80 pcs
Storage Capacity (approx.)	14 kg	31.4 kg	31.4 kg

DICE




MODEL	SRM-105A	SRM-125A	SRM-125UB
Dimension WxDxH (+ Leg)	660 x 670 x 1120 (+80) mm	660 x 670 x 1120 (+80) mm	660 x 670 x 850 mm
Electrical Consumption	480 W	590 W	590 W
Ice Production Per 24h (approx.)	90 kg (AT21°C / WT15°C) 70 kg (AT32°C / WT21°C)	106 kg (AT21°C / WT15°C) 81 kg (AT32°C / WT21°C)	106 kg (AT21°C / WT15°C) 81 kg (AT32°C / WT21°C)
Ice Production Per Cycle (approx.)	1.17kg / 126 pcs	1.17kg / 126 pcs	1.17kg / 126 pcs
Storage Capacity (approx.)	43.6 kg	43.6 kg	24 kg

DICE SRM-200/270AB




HALF DICE SRM-200AB-14




MODEL	SRM-200AB-B-301SA	SRM-200AB-14-B-301SA	SRM-270AB-B-501SA
Dimension WxDxH (+ Leg)	560 x 820 x 1581(+90)mm	560 x 820 x 1581(+90)mm	762 x 820 x 1581(+90)mm
Electrical Consumption	853 W	804 W	861 W
Ice Production Per 24h (approx.)	174 kg (AT21°C / WT15°C) 130 kg (AT32°C / WT21°C)	180 kg (AT21°C / WT15°C) 140 kg (AT32°C / WT21°C)	225 kg (AT21°C / WT15°C) 180 kg (AT32°C / WT21°C)
Ice Production Per Cycle (approx.)	1.72kg / 182pcs	1.8kg / 220pcs	2.41kg / 260pcs
Storage Capacity (approx.)	144 kg	144 kg	217 kg

DICE SRM-450AB



HALF DICE SRM-270/450AB-14



MODEL	SRM-270AB-14-B-501SA	SRM-450AB-S-B-501SA	SRM-450AB-S-14-B-501SA
Dimension WxDxH (+ Leg)	762 x 820 x 1581(+90)mm	762 x 820 x 1781(+90)mm	762 x 820 x 1781(+90)mm
Electrical Consumption	938 W	2095 W	2064 W
Ice Production Per 24h (approx.)	225 kg (AT21°C / WT15°C) 183 kg (AT32°C / WT21°C)	370 kg (AT21°C / WT15°C) 283 kg (AT32°C / WT21°C)	399 kg (AT21°C / WT15°C) 316 kg (AT32°C / WT21°C)
Ice Production Per Cycle (approx.)	2.57kg / 320pcs	4.19kg / 440pcs	4.43kg / 544pcs
Storage Capacity (approx.)	217kg	217kg	217kg


SPECIAL ICE

BALL



MODEL	IM-65NE-Q
Dimension WxDxH (+ Leg)	633 x 506 x 860(+90)mm
Electrical Consumption	390 W
Ice Production Per 24h (approx.)	24 kg (AT21°C / WT15°C) 20 kg (AT32°C / WT21°C)
Ice Production Per Cycle (approx.)	0.67kg / 15pcs
Storage Capacity (approx.)	17kg

BIG CUBE LM-65NE-LM

















MODEL	IM-65NE-LM
Dimension WxDxH	633 x 506 x 860(+90)mm
Electrical Consumption	400 W
Ice Production Per 24h (approx.)	33 kg (AT21°C / WT15°C) 25 kg (AT32°C / WT21°C)
Ice Production Per Cycle (approx.)	1.44 kg / 12 pcs
Storage Capacity (approx.)	26 kg



MODEL	B-301SA	B-501SA	B-801SA
Dimension WxDxH (+ Leg)	558.8 x 820 x 1016 (+90) mm	762 x 820 x 1016 (+90) mm	1219.2 x 820 x 1016 (+90) mm
Door Style	Upward Opening	Upward Opening	Upward Opening
Scoop	1	1	1
Effective Capacity (approx.)	144 kg	217 kg	348 kg
Weight Gross	49 kg	57 kg	86 kg

ICE STORAGE BIN COMPATABILITY

ICE MACHINE \ ICE BIN	IM-240A FM-300 FM-480 FM-600 SRM-200	IM-220 KMD-201 KMD-270	KM-470 FM-750 FM-1000 SRM-270 SRM-450	IM-240A x 2 FM-300 X 2 FM-480 x 2 FM-600 X 2 SRM-200 X 2	IM-220x 2 KMD-201 x 2 KMD-270 x 2	KM-590	IM-240D IM-240X
B-301SA  Top Kit	 22	 No Top Kit					
B-501SA  Top Kit	 22+ 8D	 8D	 30				
B-801SA  Top Kit	 22+ 8D + 18D	 8D + 18D	 30 + 18D	 22 + 22 + 4DM	 4DM + 4DR	 No Top Kit	 IMD2

ICE STORAGE BIN SPECIFICATIONS

Model Name	Storage Capacity (kg) Approx. / Max	Product Dimension (mm) W x D x H	Packing Dimension (mm) W x D x H	Net / Gross Weight (kg)
B-301SA	188 / 144	558.8 x 820 x 1016 ~ 1106	670 x 920 x 1190	37 / 49
B-501SA	173 / 217	760 x 820 x 1016 ~ 1106	900 x 940 x 1190	47 / 62
B-801SA	286 / 348	1219.2 x 820 x 1106 ~ 1136	1360 x 940 x 1190	64 / 86

Cold drinks are very much favoured especially in casual or self-service environments; operators can lessen the work or manpower with an ice dispersing machine. Hozshizaki's cubelet ice dispensers meet the need with its 2-in-1 function that makes and provides ice to customers through its compact and space saving dispensers.



CUBELET Compressed Flake Ice



MODEL DCM-80LS-HC

Dimension WxDxH (+ Leg)	350 x 525 x 645 (+50 ~ 65) mm
Electrical Consumption	290 W
Ice Production Per 24h (approx.)	65 kg (AT21°C / WT15°C) 50 kg (AT32°C / WT21°C)
Ice Production 40gm Cup (approx.)	81 cups / 30min (AT21°C / WT15°C) 73 cups / 30min (AT32°C / WT15°C)
Storage Capacity (approx.)	1.9 kg



MODEL DCM-120LS-HC

Dimension WxDxH (+ Leg)	350 x 585 x 765 (+50~65) mm
Electrical Consumption	391 W
Ice Production Per 24h (approx.)	110 kg (AT21°C / WT15°C) 90 kg (AT32°C / WT21°C)
Ice Production 40gm Cup (approx.)	157 cups / 30min (AT21°C / WT15°C) 146 cups / 30min (AT32°C / WT15°C)
Storage Capacity (approx.)	4.0 kg

CUBELET Compressed Flake Ice



MODEL DCM-80LS-P-HC

Dimension WxDxH (+ Leg)	350 x 525 x 645 (+50~65) mm
Electrical Consumption	290 W
Ice Production Per 24h (approx.)	65 kg (AT21°C / WT15°C) 50 kg (AT32°C / WT21°C)
Ice Production 40gm Cup (approx.)	81 cups / 30min (AT21°C / WT15°C) 73 cups / 30min (AT32°C / WT15°C)
Storage Capacity (approx.)	1.9 kg



MODEL DCM-120LS-P-HC

Dimension WxDxH (+ Leg)	350 x 585 x 765 (+50~65) mm
Electrical Consumption	391 W
Ice Production Per 24h (approx.)	110 kg (AT21°C / WT15°C) 90 kg (AT32°C / WT21°C)
Ice Production 40gm Cup (approx.)	157 cups / 30min (AT21°C / WT15°C) 146 cups / 30min (AT32°C / WT15°C)
Storage Capacity (approx.)	4.0 kg

Category	Ice Shape	Model Name	Self-Contained / Modular - Type	Production Capacity (kg / day)		Bin Capacity (Approx. kg)	Compatible Bins	Product Dimension (mm)	Packing Dimension (mm)	Net / Gross Weight (kg)
				AT.21°C, WT.15°C	AT.32°C, WT.21°C			W x D x H (+ Leg)	W x D x H	
IM	Cube - Standard	IM-30CA	Self-Contained	28	25	12	NA	398 x 510 x 695 (+150)	490 x 610 x 870	39 / 49
IM	Cube - 25	IM-30CA-25	Self-Contained	28	25	12	NA	398 x 510 x 695 (+150)	490 x 610 x 870	39 / 49
IM	Cube - Standard	IM-45CA	Self-Contained	44	38	15	NA	660 x 570 x 695 (+150)	760 x 680 x 870	52 / 65
IM	Cube - 25	IM-45CA-25	Self-Contained	45	41	15	NA	660 x 570 x 695 (+150)	760 x 680 x 870	52 / 65
IM	Cube - Standard	IM-65A	Self-Contained	62	49	26	NA	660 x 570 x 800 (+150)	760 x 680 x 970	60 / 74
IM	Cube - 25	IM-65A-25	Self-Contained	56	46	26	NA	660 x 570 x 800 (+150)	760 x 680 x 970	60 / 74
IM	Cube - Standard	IM-100A	Self-Contained	108	88	52	NA	660 x 570 x 1200 (+150)	760 x 680 x 1379	76 / 95
IM	Cube - 23	IM-100A-23	Self-Contained	92	78	52	NA	660 x 570 x 1200 (+150)	760 x 680 x 1379	76 / 95
IM	Cube - Standard	IM-100CNE	Self-Contained	93	84	38	NA	1004 x 600 x 700 (+150)	1110 x 700 x 875	77 / 88
IM	Cube - Standard	IM-130A	Self-Contained	125	100	52	NA	660 x 570 x 1200 (+150)	760 x 680 x 1379	79 / 98
IM	Cube - 21	IM-130A-21	Self-Contained	100	75	52	NA	660 x 570 x 1200 (+150)	760 x 680 x 1379	69 / 76
IM	Cube - 23	IM-130A-23	Self-Contained	102	88	52	NA	660 x 570 x 1200 (+150)	760 x 680 x 1379	79 / 98
IM	Cube - Standard	IM-220AA	Modular	200	175	NA		560 x 639 x 775	644 x 728 x 878	69 / 76
IM	Cube - 21	IM-220AA-21	Modular	160	155	NA		560 x 639 x 775	644 x 728 x 878	69 / 76
IM	Cube - 23	IM-220AA-23	Modular	170	155	NA		560 x 639 x 775	644 x 728 x 878	69 / 76
IM	Cube - Standard	IM-240NE	Modular	220	190	110	NA	704 x 665 x 1510	805 x 760 x 1684	111 / 128
IM	Cube - Standard	IM-240ANE	Modular	230	190	Various		560 x 700 x 880	665 x 820 x 1054	80 / 95
IM	Cube - 21	IM-240ANE-21	Modular	210	190	Various		560 x 700 x 880	665 x 820 x 1054	80 / 95
IM	Cube - 23	IM-240ANE-23	Modular	215	195	Various		560 x 700 x 880	665 x 820 x 1054	80 / 95
IM	Cube - Standard	IM-240DNE	Modular	220	200	Various		1084 x 700 x 500	1196 x 825 x 640	88 / 101
IM	Cube - 23	IM-240DNE-23	Modular	215	195	Various		1084 x 700 x 500	1196 x 825 x 640	88 / 101
IM	Cube - 32	IM-240DNE-32	Modular	210	190	Various		1084 x 700 x 500	1196 x 825 x 640	88 / 101
IM	Cube - Standard	IM-240XNE	Modular	220	200	Various		1084 x 697 x 485	1196 x 825 x 640	84 / 98
IM	Cube - 32	IM-240XNE-32	Modular	210	190	Various		1084 x 697 x 485	1196 x 825 x 640	84 / 98
KM	Crescent	KM-40C-(W/U)	Self-Contained	41	33	16	NA	452 x 610 x 838 (+150)	555 x 715 x 953	40 / 50
KM	Crescent	KM-60C-(W/U)	Self-Contained	56	45	23	NA	605 x 610 x 838 (+150)	710 x 715 x 953	46 / 58
KM	Crescent	KM-80C-(W/U)	Self-Contained	74	57	34	NA	605 x 712 x 838 (+150)	700 x 805 x 953	51 / 64
KM	Crescent	KM-130C-(W/U)	Self-Contained	120	90	55	NA	630 x 719 x 1194 (+150)	725 x 825 x 1351	69 / 81
KMD	Crescent	KMD-201AB	Modular	175	140	Various		560 x 625 x 610	668 x 727 x 783	57 / 73
KMD	Crescent	KMD-270AB	Modular	255	221	Various		560 x 625 x 610	668 x 727 x 783	57 / 73
KM	Crescent	KM-470AJ	Modular	480	380	Various		762 x 695 x 825	855 x 843 x 983	122 / 136
KM	Crescent	KM-590DJ	Modular	590	500	Various		1219 x 695 x 695	1312 x 843 x 855	136 / 154
FM	Flake	FM-120KE-HC	Self-Contained	105	82	26	NA	640 x 600 x 711 (+89)	746 x 706 x 887	66 / 76
FM	Nugget	FM-120KE-HCN	Self-Contained	96	75	32	NA	640 x 600 x 711 (+89)	746 x 706 x 887	66 / 76
FM	Flake	FM-120KE-50-HC	Self-Contained	105	82	57	NA	940 x 600 x 711 (+89)	1046 x 706 x 887	76 / 88
FM	Nugget	FM-120KE-50-HCN	Self-Contained	96	75	65	NA	940 x 600 x 711 (+89)	1046 x 706 x 887	76 / 88
FM	Flake	FM-300AKE-SB	Modular	260	200	Various		560 x 700 x 780	665 x 820 x 950	80 / 87
FM	Nugget	FM-300AKE-N-SB	Modular	225	180	Various		560 x 700 x 780	665 x 820 x 950	80 / 87
FM	Flake	FM-480AKE-SB	Modular	425	325	Various		560 x 700 x 780	665 x 820 x 950	95 / 102
FM	Nugget	FM-480AKE-N-SB	Modular	360	290	Various		560 x 700 x 780	665 x 820 x 950	95 / 102

Category	Ice Shape	Model Name	Self-Contained / Modular - Type	Production Capacity (kg / day)		Bin Capacity (Approx. kg)	Compatible Bins	Product Dimension (mm)	Packing Dimension (mm)	Net / Gross Weight (kg)
				AT.21°C, WT.15°C	AT.32°C, WT.21°C			W x D x H (- + Leg)	W x D x H	
FM	Flake	FM-600AKE-SB	Modular	540	445	Various		560 x 700 x 780	665 x 820 x 950	107 / 114
FM	Nugget	FM-600AKE-N-SB	Modular	460	400	Various		560 x 700 x 780	665 x 820 x 950	107 / 114
FM	Flake	FM-1000AKE-SB	Modular	890	740	Various		762 x 700 x 780	873 x 820 x 947	146 / 156
FM	Nugget	FM-1000AKE-N-SB	Modular	730	590	Various		762 x 700 x 780	873 x 820 x 947	146 / 156
SRM	Dice	SRM-45A	Self-Contained	41	35	14	NA	500 x 580 x 750	625 x 716 x 875	36 / 40
SRM	Dice	SRM-60A	Self-Contained	60	50	31.4	NA	660 x 670 x 970 (+80)	785 x 860 x 1100	58 / 65
SRM	Dice	SRM-80A	Self-Contained	72	57	31.4	NA	660 x 670 x 970 (+80)	785 x 860 x 1100	56.5 / 63
SRM	Dice	SRM-105A	Self-Contained	90	70	43.6	NA	660 x 670 x 1120 (+80)	785 x 860 x 1250	61 / 69
SRM	Dice	SRM-125A	Self-Contained	106	81	43.6	NA	660 x 670 x 1120 (+80)	785 x 860 x 1250	64.5 / 72
SRM	Dice	SRM-125UB	Self-Contained	106	81	24	NA	660 x 670 x 850	780 x 850 x 1050	58 / 75
SRM	Dice	SRM-200AB	Modular	174	130	Various		560 x 620 x 560	650 x 710 x 750	50 / 66.5
SRM	Half Dice	SRM-200AB-14	Modular	180	140	Various		560 x 620 x 560	650 x 710 x 750	50 / 66.5
SRM	Dice	SRM-270AB	Modular	225	180	Various		760 x 620 x 560	850 x 710 x 750	59 / 78
SRM	Half Dice	SRM-270AB-14	Modular	225	183	Various		760 x 620 x 560	850 x 710 x 750	59 / 78
SRM	Dice	SRM-450AB-S	Modular	370	283	Various		760 x 620 x 760	865 x 720 x 945	84 / 101
SRM	Half Dice	SRM-450AB-S-14	Modular	399	316	Various		760 x 620 x 760	865 x 720 x 945	84 / 101
Special	Sphere	IM-65NE-Q	Self-Contained	24	20	17	NA	633 x 506 x 860 (+90)	735 x 570 x 1012	53 / 66
Special	Big Cube	IM-65NE-LM	Self-Contained	33	25	26	NA	660 x 506 x 860 (+90)	735 x 570 x 1012	53 / 61
DCM	Dispenser	DCM-80LS-HC	Self-Contained	65	50	1.9	NA	350 x 525 x 645 (+50-65)	400 x 581 x 749	41 / 44
DCM	Dispenser	DCM-120LS-HC	Self-Contained	110	90	4	NA	350 x 585 x 765 (+50-65)	400 x 641 x 872	44 / 48
DCM	Dispenser	DCM-80LS-P-HC	Self-Contained	65	50	1.9	NA	350 x 525 x 645 (+50-65)	400 x 581 x 749	41 / 44
DCM	Dispenser	DCM-120LS-P-HC	Self-Contained	110	90	4	NA	350 x 585 x 765 (+50-65)	400 x 641 x 872	44 / 48



As our mission and plan to achieve and maintain optimum your satisfaction, we proudly introduce our technology based on years of researching and innovating for better quality of Chillers and Freezers: **A-Fit Technology.**

Upright Refrigerator
Depth 800 mm



MODEL	HR-78MA-S	HR-128MA-S
Dimension WxDxH	700 x 800 x 2050 mm	1200 x 800 x 2050 mm
Electrical Consumption	238 W	333 W
Temperature Control	-6°C ~ 12°C	-6°C ~ 12°C
Number of Shelves	4	8
Effective Capacity	569 L	1053 L



MODEL	HR-148MA-S	HR-188MA-S
Dimension WxDxH	1400 x 800 x 2050 mm	1800 x 800 x 2050 mm
Electrical Consumption	367 W	413 W
Temperature Control	-6°C ~ 12°C	-6°C ~ 12°C
Number of Shelves	8	12
Effective Capacity	1243 L	1632 L

Upright Refrigerator
Depth 650 mm



MODEL	HR-76MA-S	HR-126MA-S	HR-146MA-S
Dimension WxDxH	700 x 650 x 2050 mm	1200 x 650 x 2050 mm	1400 x 650 x 2050 mm
Electrical Consumption	237 W	343 W	610 W
Temperature Control	-6°C ~ 12°C	-6°C ~ 12°C	-6°C ~ 12°C
Number of Shelves	4	8	8
Effective Capacity	467 L	866 L	1021 L

Upright Freezer
Depth 800 mm



MODEL	HF-78MA-S	HF-128MA-S
Dimension WxDxH	700 x 800 x 2050 mm	1200 x 800 x 2050 mm
Electrical Consumption	469 W	700 W
Temperature Control	-23°C ~ -7°C	-23°C ~ -7°C
Number of Shelves	4	8
Effective Capacity	569 L	1047 L



MODEL	HF-148MA-S	HF-188MA-S
Dimension WxDxH	1400 x 800 x 2050 mm	1800 x 800 x 2050 mm
Electrical Consumption	740 W	917 W
Temperature Control	-23°C ~ -7°C	-23°C ~ -7°C
Number of Shelves	8	12
Effective Capacity	1233 L	1622 L

Upright Freezer
Depth 650 mm



MODEL	HF-76MA-S	HF-126MA-S	HF-146MA-S
Dimension WxDxH	700 x 650 x 2050 mm	1200 x 650 x 2050 mm	1400 x 650 x 2050 mm
Electrical Consumption	419 W	696 W	740 W
Temperature Control	-23°C ~ -7°C	-23°C ~ -7°C	-23°C ~ -7°C
Number of Shelves	4	8	8
Effective Capacity	467 L	856 L	982 L

Upright Dual Temp.



MODEL HRF-78MB-S



MODEL HRF-128MA-S

Dimension WxDxH	700 x 800 x 2050 mm	1200 x 800 x 2050 mm
Electrical Consumption	576 W	704 W
Refrigerator Temperature Control	-2°C ~ 12°C	-6°C ~ 12°C
Freezer Temperature Control	-23°C ~ -11°C	-23°C ~ -7°C
Number of Shelves	4	8
Effective Capacity	448 L (Refrigerator: 234 L, Freezer: 214 L)	862 L (Refrigerator: 431 L, Freezer: 431 L)



MODEL HRF-148MA-S



MODEL HRF-188MA-S

Dimension WxDxH	1400 x 800 x 2050 mm	1800 x 800 x 2050 mm
Electrical Consumption	808 W	844 W
Refrigerator Temperature Control	-6°C ~ 12°C	-6°C ~ 12°C
Freezer Temperature Control	-23°C ~ -7°C	-23°C ~ -7°C
Number of Shelves	8	12
Effective Capacity	1054 L (Refrigerator: 527 L, Freezer: 527 L)	1452 L (Refrigerator: 980 L, Freezer: 472 L)



A-FIT UPRIGHT SPECIFICATIONS

Category	Product Group	Model Name	Effective Capacity		No. of Shelves	Temperature Control		Electric Consumption	Product Dimension (mm) W x D x H
			Refrigerator	Freezer		Refrigerator	Freezer		
A-fit	Upright	HR-78MA-S	569 L	-	4	-6°C to 12°C	-	238 W	700 x 800 x 2050
A-fit	Upright	HR-128MA-S	1053 L	-	8	-6°C to 12°C	-	333 W	1200 x 800 x 2050
A-fit	Upright	HR-148MA-S	1243 L	-	8	-6°C to 12°C	-	367 W	1400 x 800 x 2050
A-fit	Upright	HR-188MA-S	1632 L	-	12	-6°C to 12°C	-	413 W	1800 x 800 x 2050
A-fit	Upright	HR-76MA-S	467 L	-	4	-6°C to 12°C	-	237 W	700 x 650 x 2050
A-fit	Upright	HR-126MA-S	866 L	-	8	-6°C to 12°C	-	343 W	1200 x 650 x 2050
A-fit	Upright	HR-146MA-S	1021 L	-	8	-6°C to 12°C	-	610 W	1400 x 650 x 2050
A-fit	Upright	HF-78MA-S	569 L	-	4	-23°C to -7°C	-	469 W	700 x 800 x 2050
A-fit	Upright	HF-128MA-S	1047 L	-	8	-23°C to -7°C	-	700 W	1200 x 800 x 2050
A-fit	Upright	HF-148MA-S	1233 L	-	8	-23°C to -7°C	-	740 W	1400 x 800 x 2050
A-fit	Upright	HF-188MA-S	1622 L	-	12	-23°C to -7°C	-	917 W	1800 x 800 x 2050
A-fit	Upright	HF-76MA-S	467 L	-	4	-23°C to -7°C	-	419 W	700 x 650 x 2050
A-fit	Upright	HF-126MA-S	856 L	-	8	-23°C to -7°C	-	696 W	1200 x 650 x 2050
A-fit	Upright	HF-146MA-S	982 L	-	8	-23°C to -7°C	-	740 W	1400 x 650 x 2050



A-FIT DUAL TEMP. SPECIFICATIONS

Category	Model Name	Effective Capacity		No. of Shelves	Temperature Control		Electric Consumption	Product Dimension (mm) W x D x H
		Refrigerator	Freezer		Refrigerator	Freezer		
Dual Temp.	HRF-78MB-S	234 L	214 L	4	-2°C to 12°C	-23°C to -11°C	576 W	700 x 800 x 2050
Dual Temp.	HRF-128MA-S	431 L	431 L	8	-6°C to 12°C	-23°C to -7°C	704 W	1200 x 800 x 2050
Dual Temp.	HRF-148MA-S	527 L	527 L	8	-6°C to 12°C	-23°C to -7°C	808 W	1400 x 800 x 2050
Dual Temp.	HRF-188MA-S	980 L	472 L	12	-6°C to 12°C	-23°C to -7°C	844 W	1800 x 800 x 2050

Undercounter Refrigerator Depth 600 mm



MODEL RT-96MA-S



MODEL RT-126MA-S

Dimension WxDxH	900 x 600 x 850 mm	1200 x 600 x 850 mm
Electrical Consumption	240 W	245 W
Temperature Control	-6°C ~ 12°C	-6°C ~ 12°C
Number of Shelves	2	4
Effective Capacity	151 L	231 L



MODEL RT-156MA-S



MODEL RT-186MA-S



MODEL RT-216MA-S

Dimension WxDxH	1500 x 600 x 850 mm	1800 x 600 x 850 mm	2110 x 600 x 850 mm
Electrical Consumption	245 W	280 W	318 W
Temperature Control	-6°C ~ 12°C	-6°C ~ 12°C	-2°C ~ 12°C
Number of Shelves	4	6	6
Effective Capacity	318 L	401 L	490 L

Undercounter Refrigerator Depth 750 mm



MODEL RT-98MA-S



MODEL RT-128MA-S

Dimension WxDxH	900 x 750 x 850 mm	1200 x 750 x 850 mm
Electrical Consumption	240 W	245 W
Temperature Control	-6°C ~ 12°C	-6°C ~ 12°C
Number of Shelves	2	4
Effective Capacity	199 L	307 L



MODEL	RT-158MA-S	RT-188MA-S	RT-218MA-S
Dimension WxDxH	1500 x 750 x 850 mm	1800 x 750 x 850 mm	2110 x 750 x 850
Electrical Consumption	245 W	280 W	318W
Chiller Temperature Control	-6°C ~ 12°C	-6°C ~ 12°C	-6°C to 12°C
Number of Shelves	4	6	6
Effective Capacity	420 L	502 L	647L

Undercounter
Refrigerator
Depth 770 mm



MODEL	RT-178MA-S	RT-248MA-S
Dimension WxDxH	1700 x 770 x 850 mm	2400 x 770 x 850 mm
Electrical Consumption	280W	310W
Chiller Temperature Control	-6°C to 12°C	-6°C to 12°C
Number of Drawers	Accommodate to 2/1 GN Pan	Accommodate to 2/1 GN Pan
Effective Capacity	513L	787L

Undercounter
Low Drawer Refrigerator -
Depth 750mm



MODEL	RTL-108MA-SD	RTL-148MA-SD	RTL-188MA-SD
Dimension WxDxH	980 x 750 x 570 mm	1400 x 750 x 570 mm	1820 x 750 x 570 mm
Electrical Consumption	304 W	324 W	257 W
Chiller Temperature Control	-6°C ~ 12°C	-6°C ~ 12°C	-6°C ~ 12°C
Number of Drawers	2	4	6
Effective Capacity	85 L	176 L	267 L

Undercounter
Low Drawer
Refrigerator
Depth 600mm



MODEL	RTL-106MA-SD	RTL-146MA-SD	RTL-186MA-SD
Dimension WxDxH	980 x 600 x 570 mm	1400 x 600 x 570 mm	1820 x 600 x 570 mm
Electrical Consumption	238 W	250 W	260 W
Chiller Temperature Control	-6°C ~ 12°C	-6°C ~ 12°C	-6°C ~ 12°C
Number of Drawers	2	4	6
Effective Capacity	60 L	129 L	198 L

Undercounter
Door + Drawer
Refrigerator
Depth 600 mm



MODEL	RT-126MA-S-3D	RT-156MA-S-3D	RT-186MA-S-3D
Dimension WxDxH	1200 x 600 x 850 mm	1500 x 600 x 850 mm	1800 x 600 x 850 mm
Electrical Consumption	245 W	245 W	280 W
Chiller Temperature Control	-6°C ~ 12°C	-6°C ~ 12°C	-6°C ~ 12°C
Number of Shelves	2	2	4
Number of Drawers	3	3	3
Effective Capacity	231 L	318 L	401 L

Undercounter
Door + Drawer
Refrigerator
Depth 750 mm



MODEL	RT-128MA-S-3D	RT-158MA-S-3D	RT-188MA-S-3D
Dimension WxDxH	1200 x 750 x 850 mm	1500 x 750 x 1076 mm	1800 x 750 x 850 mm
Electrical Consumption	245 W	245 W	280 W
Chiller Temperature Control	-6°C ~ 12	-6°C ~ 12°C	-6°C ~ 12°C
Number of Shelves	2	2	4
Number of Drawers	3	3	3
Effective Capacity	307 L	420 L	502 L

Undercounter
Freezer
Depth 600 mm



MODEL	FT-96MA-S	FT-126MA-S
Dimension WxDxH	900 x 600 x 850 mm	1200 x 600 x 850 mm
Electrical Consumption	415 W	410 W
Freezer Temperature Control	-23°C ~ -7°C	-23°C ~ -7°C
Number of Shelves	2	4
Effective Capacity	151 L	231 L



MODEL	FT-156MA-S	FT-186MA-S
Dimension WxDxH	1500 x 600 x 850 mm	1800 x 600 x 850 mm
Electrical Consumption	415 W	400 W
Freezer Temperature Control	-23°C ~ -7°C	-23°C ~ -7°C
Number of Shelves	4	6
Effective Capacity	318 L	401 L

Undercounter
Freezer
Depth 750 mm



MODEL	FT-98MA-S	FT-128MA-S
Dimension WxDxH	900 x 750 x 850 mm	1200 x 750 x 850 mm
Electrical Consumption	420 W	418 W
Freezer Temperature Control	-23°C ~ -7°C	-23°C ~ -7°C
Number of Shelves	2	4
Effective Capacity	199 L	307 L



MODEL	FT-158MA-S	FT-188MA-S
Dimension WxDxH	1500 x 750 x 850 mm	1800 x 750 x 850 mm
Electrical Consumption	415 W	400 W
Freezer Temperature Control	-23°C ~ -7°C	-23°C ~ -7°C
Number of Shelves	4	6
Effective Capacity	420 L	502 L

Undercounter
Low Drawer Freezer
Depth 750 mm



MODEL	FTL-108MA-SD	FTL-148MA-SD	FTL-188MA-SD
Dimension WxDxH	980 x 750 x 570 mm	1400 x 750 x 570 mm	1820 x 750 x 570 mm
Electrical Consumption	409 W	476 W	453 W
Freezer Temperature Control	-23°C ~ -7°C	-23°C ~ -7°C	-23°C ~ -7°C
Number of Drawers	2	4	6
Effective Capacity	85 L	176 L	267 L

Undercounter
Low Drawer Freezer
Depth 600mm



MODEL	FTL-106MA-SD	FTL-146MA-SD	FTL-186MA-SD
Dimension WxDxH	980 x 600 x 570 mm	1400 x 600 x 570 mm	1820 x 600 x 570 mm
Electrical Consumption	409 W	439 W	453 W
Freezer Temperature Control	-23°C ~ -7°C	-23°C ~ -7°C	-23°C ~ -7°C
Number of Drawers	2	4	6
Effective Capacity	60 L	129 L	198 L

Undercounter
Door + Drawer
Freezer
Depth 600 mm



MODEL FT-126MA-S-3D

FT-156MA-S-3D

FT-186MA-S-3D

Dimension WxDxH	1200 x 600 x 850 mm
Electrical Consumption	410 W
Freezer Temperature Control	-23°C ~ -7°C
Number of Shelves	2
Number of Drawers	3
Effective Capacity	231 L

Dimension WxDxH	1500 x 600 x 850 mm
Electrical Consumption	415 W
Freezer Temperature Control	-23°C ~ -7°C
Number of Shelves	2
Number of Drawers	3
Effective Capacity	318 L

Dimension WxDxH	1800 x 600 x 850 mm
Electrical Consumption	400 W
Freezer Temperature Control	-23°C ~ -7°C
Number of Shelves	4
Number of Drawers	3
Effective Capacity	401 L

Undercounter
Door + Drawer
Freezer
Depth 750 mm



MODEL FT-128MA-S-3D

FT-158MA-S-3D

FT-188MA-S-3D

Dimension WxDxH	1200 x 750 x 850 mm
Electrical Consumption	418 W
Freezer Temperature Control	-23°C ~ -7°C
Number of Shelves	2
Number of Drawers	3
Effective Capacity	307 L

Dimension WxDxH	1500 x 750 x 850 mm
Electrical Consumption	415 W
Freezer Temperature Control	-23°C ~ -7°C
Number of Shelves	2
Number of Drawers	3
Effective Capacity	420 L

Dimension WxDxH	1800 x 750 x 850 mm
Electrical Consumption	400 W
Freezer Temperature Control	-23°C ~ -7°C
Number of Shelves	4
Number of Drawers	3
Effective Capacity	502 L



A-FIT UNDERCOUNTER REFRIGERATOR SPECIFICATIONS

Category	Product Group	Model Name	Effective Capacity	No. of Compartments		Temperature Control	Electric Consumption	Product Dimension (mm)
				Shelves	Drawers			W x D x H
A-fit	Undercounter	RT-96MA-S	151 L	2	-	-6°C to 12°C	240 W	900 x 600 x 850
A-fit	Undercounter	RT-126MA-S	231 L	4	-	-6°C to 12°C	245 W	1200 x 600 x 850
A-fit	Undercounter	RT-156MA-S	318 L	4	-	-6°C to 12°C	245 W	1500 x 600 x 850
A-fit	Undercounter	RT-186MA-S	401 L	6	-	-6°C to 12°C	280 W	1800 x 600 x 850
A-fit	Undercounter	RT-216MA-S	490 L	6	-	-2°C to 12°C	318 W	2110 x 600 x 850
A-fit	Undercounter	RT-98MA-S	199 L	2	-	-6°C to 12°C	240 W	900 x 750 x 850
A-fit	Undercounter	RT-128MA-S	307 L	4	-	-6°C to 12°C	245 W	1200 x 750 x 850
A-fit	Undercounter	RT-158MA-S	420 L	4	-	-6°C to 12°C	245 W	1500 x 750 x 850
A-fit	Undercounter	RT-188MA-S	502 L	6	-	-6°C to 12°C	280 W	1800 x 750 x 850
A-fit	Undercounter	RT-218MA-S	647 L	6	-	-6°C to 12°C	318 W	2110 x 750 x 850
A-fit	Undercounter	RT-178MA-S	513 L	2/1 GN Pan	-	-6°C to 12°C	280 W	1700 x 770 x 850
A-fit	Undercounter	RT-248MA-S	787 L	2/1 GN Pan	-	-6°C to 12°C	310 W	2400 x 770 x 850
A-fit	U/C Low Drawer	RTL-108MA-SD	85 L	-	2	-6°C to 12°C	304 W	980 x 750 x 570
A-fit	U/C Low Drawer	RTL-148MA-SD	176 L	-	4	-6°C to 12°C	324 W	1400 x 750 x 570
A-fit	U/C Low Drawer	RTL-188MA-SD	267 L	-	6	-6°C to 12°C	257 W	1820 x 750 x 570
A-fit	U/C Low Drawer	RTL-106MA-SD	60 L	-	2	-6°C to 12°C	238 W	980 x 600 x 570
A-fit	U/C Low Drawer	RTL-146MA-SD	129 L	-	4	-6°C to 12°C	250 W	1400 x 600 x 570
A-fit	U/C Low Drawer	RTL-186MA-SD	198 L	-	6	-6°C to 12°C	260 W	1820 x 600 x 570
A-fit	U/C Door + Drawer	RT-126MA-S-3D	231 L	2	3	-6°C to 12°C	245 W	1200 x 600 x 850
A-fit	U/C Door + Drawer	RT-156MA-S-3D	318 L	2	3	-6°C to 12°C	245 W	1500 x 600 x 850
A-fit	U/C Door + Drawer	RT-186MA-S-3D	401 L	4	3	-6°C to 12°C	280 W	1800 x 600 x 850
A-fit	U/C Door + Drawer	RT-128MA-S-3D	307 L	2	3	-6°C to 12°C	245 W	1200 x 750 x 850
A-fit	U/C Door + Drawer	RT-158MA-S-3D	420 L	2	3	-6°C to 12°C	245 W	1500 x 750 x 850
A-fit	U/C Door + Drawer	RT-188MA-S-3D	502 L	4	3	-6°C to 12°C	280 W	1800 x 750 x 850



A-FIT UNDERCOUNTER FREEZER SPECIFICATIONS

Category	Product Group	Model Name	Effective Capacity	No. of Compartments		Temperature Control	Electric Consumption	Product Dimension (mm)
				Shelves	Drawers			W x D x H
A-fit	Undercounter	FT-96MA-S	151 L	2	-	-23°C to -7°C	415 W	900 x 600 x 850
A-fit	Undercounter	FT-126MA-S	231 L	4	-	-23°C to -7°C	410 W	1200 x 600 x 850
A-fit	Undercounter	FT-156MA-S	318 L	4	-	-23°C to -7°C	415 W	1500 x 600 x 850
A-fit	Undercounter	FT-186MA-S	401 L	6	-	-23°C to -7°C	400 W	1800 x 600 x 850
A-fit	Undercounter	FT-98MA-S	199 L	2	-	-23°C to -7°C	420 W	900 x 750 x 850
A-fit	Undercounter	FT-128MA-S	307 L	4	-	-23°C to -7°C	418 W	1200 x 750 x 850
A-fit	Undercounter	FT-158MA-S	420 L	4	-	-23°C to -7°C	415 W	1500 x 750 x 850
A-fit	Undercounter	FT-188MA-S	502 L	6	-	-23°C to -7°C	400 W	1800 x 750 x 850
A-fit	U/C Low Drawer	FTL-108MA-SD	85 L	-	2	-23°C to -7°C	409 W	980 x 750 x 570
A-fit	U/C Low Drawer	FTL-148MA-SD	176 L	-	4	-23°C to -7°C	476 W	1400 x 750 x 570
A-fit	U/C Low Drawer	FTL-188MA-SD	267 L	-	6	-23°C to -7°C	453 W	1820 x 750 x 570
A-fit	U/C Low Drawer	FTL-106MA-SD	60 L	-	2	-23°C to -7°C	409 W	980 x 600 x 570
A-fit	U/C Low Drawer	FTL-146MA-SD	129 L	-	4	-23°C to -7°C	439 W	1400 x 600 x 570
A-fit	U/C Low Drawer	FTL-186MA-SD	198 L	-	6	-23°C to -7°C	453 W	1820 x 600 x 570
A-fit	U/C Door + Drawer	FT-126MA-S-3D	231 L	2	3	-23°C to -7°C	410 W	1200 x 600 x 850
A-fit	U/C Door + Drawer	FT-156MA-S-3D	318 L	2	3	-23°C to -7°C	415 W	1500 x 600 x 850
A-fit	U/C Door + Drawer	FT-186MA-S-3D	401 L	4	3	-23°C to -7°C	400 W	1800 x 600 x 850
A-fit	U/C Door + Drawer	FT-128MA-S-3D	307 L	2	3	-23°C to -7°C	418 W	1200 x 750 x 850
A-fit	U/C Door + Drawer	FT-158MA-S-3D	420 L	2	3	-23°C to -7°C	415 W	1500 x 750 x 850
A-fit	U/C Door + Drawer	FT-188MA-S-3D	502 L	4	3	-23°C to -7°C	400 W	1800 x 750 x 850

Upright Pillar-less Refrigerator



MODEL	HR-128MA-S-ML	HR-148MA-S-ML
Dimension WxDxH	1200 x 800 x 2050 mm	1400 x 800 x 2050 mm
Electrical Consumption	556 W	471 W
Freezer Temperature Control	-6°C ~ 12°C	-6°C ~ 12°C
Number of Shelves	8	8
Effective Capacity	1053 L	1243 L

Upright Pillar-less Freezer



MODEL	HF-128MA-S-ML	HF-148MA-S-ML
Dimension WxDxH	1200 x 800 x 2050 mm	1400 x 800 x 2050 mm
Electrical Consumption	836 W	856 W
Freezer Temperature Control	-23°C ~ -7°C	-23°C ~ -7°C
Number of Shelves	8	8
Effective Capacity	1047 L	1243 L

Undercounter Pillar-less Refrigerator Depth 600 mm



MODEL	RT-126MA-S-ML	RT-156MA-S-ML	RT-186MA-S-ML
Dimension WxDxH	1200 x 600 x 850 mm	1500 x 600 x 850 mm	1800 x 600 x 850 mm
Electrical Consumption	245 W	260 W	280 W
Chiller Temperature Control	-6°C ~ 12°C	-6°C ~ 12°C	-6°C ~ 12°C
Number of Shelves	4	4	6
Effective Capacity	231 L	318 L	401 L

Undercounter Pillar-less Refrigerator Depth 750 mm



MODEL	RT-128MA-S-ML	RT-158MA-S-ML	RT-188MA-S-ML
Dimension WxDxH	1200 x 750 x 850 mm	1500 x 750 x 850 mm	1800 x 750 x 850 mm
Electrical Consumption	245 W	260 W	280 W
Chiller Temperature Control	-6°C ~ 12°C	-6°C ~ 12°C	-6°C ~ 12°C
Number of Shelves	4	4	6
Effective Capacity	307 L	420 L	502 L

Undercounter Pillar-less Freezer Depth 600 mm



MODEL	FT-126MA-S-ML	FT-156MA-S-ML	FT-186MA-S-ML
Dimension WxDxH	1200 x 600 x 850 mm	1500 x 600 x 850 mm	1800 x 600 x 850 mm
Electrical Consumption	410 W	415 W	400 W
Freezer Temperature Control	-23°C ~ -7°C	-23°C ~ -7°C	-23°C ~ -7°C
Number of Shelves	4	4	6
Effective Capacity	231 L	318 L	401 L

Undercounter Pillar-less Freezer Depth 750 mm



MODEL	FT-128MA-S-ML	FT-158MA-S-ML	FT-188MA-S-ML
Dimension WxDxH	1200 x 750 x 850 mm	1500 x 750 x 850 mm	1800 x 750 x 850 mm
Electrical Consumption	418 W	415 W	400 W
Chiller Temperature Control	-23°C ~ -7°C	-23°C ~ -7°C	-23°C ~ -7°C
Number of Shelves	4	4	6
Effective Capacity	307 L	420 L	502 L

Category	Product Group	Model Name	Effective Capacity	No. of Compartments		Temperature Control	Electric Consumption	Product Dimension (mm)
				Shelves	Drawers			W x D x H
A-fit	Upright (Pillar-less)	HR-128MA-S-ML	1053 L	8	–	-6°C to 12°C	556 W	1200 x 800 x 2050
A-fit	Upright (Pillar-less)	HR-148MA-S-ML	1243 L	8	–	-6°C to 12°C	471 W	1400 x 800 x 2050
A-fit	Upright (Pillar-less)	HF-128MA-S-ML	1047 L	8	–	-6°C to 12°C	836 W	1200 x 800 x 2050
A-fit	Upright (Pillar-less)	HF-148MA-S-ML	1243 L	8	–	-6°C to 12°C	856 W	1400 x 800 x 2050
A-fit	U/C (Pillar-less)	RT-126MA-S-ML	231 L	4	–	-6°C to 12°C	245 W	1200 x 600 x 850
A-fit	U/C (Pillar-less)	RT-156MA-S-ML	318 L	4	–	-6°C to 12°C	260 W	1500 x 600 x 850
A-fit	U/C (Pillar-less)	RT-186MA-S-ML	401 L	6	–	-6°C to 12°C	280 W	1800 x 600 x 850
A-fit	U/C (Pillar-less)	RT-128MA-S-ML	307 L	4	–	-6°C to 12°C	245 W	1200 x 750 x 850
A-fit	U/C (Pillar-less)	RT-158MA-S-ML	420 L	4	–	-6°C to 12°C	260 W	1500 x 750 x 850
A-fit	U/C (Pillar-less)	RT-188MA-S-ML	502 L	6	–	-6°C to 12°C	280 W	1800 x 750 x 850
A-fit	U/C (Pillar-less)	FT-126MA-S-ML	231 L	–	4	-23°C to -7°C	410 W	1200 x 600 x 850
A-fit	U/C (Pillar-less)	FT-156MA-S-ML	318 L	–	4	-23°C to -7°C	415 W	1500 x 600 x 850
A-fit	U/C (Pillar-less)	FT-186MA-S-ML	401 L	–	6	-23°C to -7°C	400 W	1800 x 600 x 850
A-fit	U/C (Pillar-less)	FT-128MA-S-ML	307 L	–	4	-23°C to -7°C	418 W	1200 x 750 x 850
A-fit	U/C (Pillar-less)	FT-158MA-S-ML	420 L	–	4	-23°C to -7°C	415 W	1500 x 750 x 850
A-fit	U/C (Pillar-less)	FT-188MA-S-ML	502 L	–	6	-23°C to -7°C	400 W	1800 x 750 x 850

Upright
Heated Swing Glass Door
Refrigerator
Depth 800 mm



MODEL HR-78MA-SG

Dimension **WxDxH** 700 x 800 x 2050 mm
Electrical Consumption 463 W
Temperature Control -2°C ~ 12°C
Number of Shelves 4
Effective Capacity 569 L

HR-128MA-SG

1200 x 800 x 2050 mm
533 W
-2°C ~ 12°C
8
1110 L



MODEL HR-148MA-SG

Dimension **WxDxH** 1400 x 800 x 2050 mm
Electrical Consumption 559 W
Temperature Control -2°C ~ 12°C
Number of Shelves 8
Effective Capacity 1310 L

HR-188MA-SG

1800 x 800 x 2050 mm
609 W
-2°C ~ 12°C
12
1720 L

Upright
Heated Swing Glass Door
Refrigerator
Depth 650 mm



MODEL HR-76MA-SG

Dimension **WxDxH** 700 x 650 x 2050 mm
Electrical Consumption 463 W
Temperature Control -2°C ~ 12°C
Number of Shelves 4
Effective Capacity 467 L

HR-126MA-SG

1200 x 650 x 2050 mm
533 W
-2°C ~ 12°C
8
866 L


MODEL **HR-146MA-SG**

Dimension WxDxH	1400 x 650 x 2050 mm
Electrical Consumption	559 W
Chiller Temperature Control	-2°C ~ 12°C
Number of Shelves	8
Effective Capacity	1021 L

Undercounter
Sliding Glass Door
Refrigerator
Depth 600 mm


MODEL **RT-126MA-SSG**

Dimension WxDxH	1200 x 600 x 850 mm
Electrical Consumption	295 W
Chiller Temperature Control	-2°C ~ 12°C
Number of Shelves	4
Effective Capacity	231 L


MODEL **RT-156MA-SSG**

Dimension WxDxH	1500 x 600 x 850 mm
Electrical Consumption	315 W
Chiller Temperature Control	-2°C ~ 12°C
Number of Shelves	4
Effective Capacity	318 L


MODEL **RT-186MA-SSG**

Dimension WxDxH	1800 x 600 x 850 mm
Electrical Consumption	315 W
Chiller Temperature Control	-2°C ~ 12°C
Number of Shelves	6
Effective Capacity	401 L

Undercounter
Sliding Glass Door
Refrigerator
Depth 750 mm


MODEL **RT-128MA-SSG**

Dimension WxDxH	1200 x 750 x 850 mm
Electrical Consumption	247 W
Chiller Temperature Control	2°C ~ 12°C
Number of Shelves	4
Effective Capacity	307 L


MODEL **RT-158MA-SSG**

Dimension WxDxH	1500 x 750 x 850 mm
Electrical Consumption	260 W
Chiller Temperature Control	-2°C ~ 12°C
Number of Shelves	4
Effective Capacity	420 L


MODEL **RT-188MA-SSG**

Dimension WxDxH	1800 x 750 x 850 mm
Electrical Consumption	280 W
Chiller Temperature Control	-2°C ~ 12°C
Number of Shelves	6
Effective Capacity	502 L

Upright
Heated Long Glass Door
Refrigerator
Depth 650 mm


MODEL **HR-76MA-SLG**

Dimension WxDxH	700 x 650 x 2050 mm
Electrical Consumption	463 W
Chiller Temperature Control	-2°C ~ 12°C
Number of Shelves	4
Effective Capacity	467 L


MODEL **HR-126MA-SLG**

Dimension WxDxH	1200 x 650 x 2050 mm
Electrical Consumption	533 W
Chiller Temperature Control	-2°C ~ 12°C
Number of Shelves	8
Effective Capacity	866 L

Upright
Heated Long Glass Door
Refrigerator
Depth 800 mm


MODEL **HR-78MA-SLG**

Dimension WxDxH	700 x 800 x 2050 mm
Electrical Consumption	463 W
Chiller Temperature Control	-2°C ~ 12°C
Number of Shelves	4
Effective Capacity	569 L


MODEL **HR-128MA-SLG**

Dimension WxDxH	1200 x 800 x 2050 mm
Electrical Consumption	533 W
Chiller Temperature Control	-2°C ~ 12°C
Number of Shelves	8
Effective Capacity	1053 L

Undercounter
Heated Swing Glass Door
Refrigerator
Depth 600 mm


MODEL **RT-96MA-SG**

Dimension WxDxH	900 x 600 x 850 mm
Electrical Consumption	201 W
Temperature Control	-2°C ~ 12°C
Number of Shelves	2
Effective Capacity	151 L


MODEL **RT-126MA-SG**

Dimension WxDxH	1200 x 600 x 850 mm
Electrical Consumption	229 W
Temperature Control	-2°C ~ 12°C
Number of Shelves	4
Effective Capacity	231 L


MODEL RT-156MA-SG

Dimension WxDxH	1500 x 600 x 850 mm
Electrical Consumption	241 W
Temperature Control	-2°C ~ 12°C
Number of Shelves	4
Effective Capacity	318 L


MODEL RT-186MA-SG

Dimension WxDxH	1800 x 600 x 850 mm
Electrical Consumption	264 W
Temperature Control	-2°C ~ 12°C
Number of Shelves	6
Effective Capacity	401 L

Undercounter
Heated Swing Glass Door
Refrigerator
Depth 750 mm


MODEL RT-98MA-SG

Dimension WxDxH	900 x 750 x 850
Electrical Consumption	201 W
Temperature Control	-2°C ~ 12°C
Number of Shelves	2
Effective Capacity	199 L


MODEL RT-128MA-SG

Dimension WxDxH	1200 x 750 x 850 mm
Electrical Consumption	224 W
Temperature Control	-2°C ~ 12°C
Number of Shelves	4
Effective Capacity	307 L


MODEL RT-158MA-SG

Dimension WxDxH	1500 x 750 x 850 mm
Electrical Consumption	241 W
Temperature Control	-2°C ~ 12°C
Number of Shelves	4
Effective Capacity	420 L


MODEL RT-188MA-SG

Dimension WxDxH	1800 x 750 x 850 mm
Electrical Consumption	264 W
Temperature Control	-2°C ~ 12°C
Number of Shelves	6
Effective Capacity	502 L

Prep Table


MODEL RT-128MA-S-PR

Dimension WxDxH	1200 x 750 x 850 mm
Electrical Consumption	81 W
Temperature Control	-2°C ~ 12°C
Number of Shelves	4
Effective Capacity	304 L


MODEL RT-158MA-S-PR

Dimension WxDxH	1500 x 750 x 850 mm
Electrical Consumption	84 W
Temperature Control	-2°C ~ 12°C
Number of Shelves	4
Effective Capacity	410 L


MODEL RT-188MA-S-PR

Dimension WxDxH	1800 x 750 x 850 mm
Electrical Consumption	96 W
Temperature Control	-2°C ~ 12°C
Number of Shelves	6
Effective Capacity	517 L

Prep Table
(Cover + Cutting Board)


MODEL RT-128MA-S-PRS

Dimension WxDxH	1200 x 750 x 1076 mm
Electrical Consumption	81 W
Temperature Control	-2°C ~ 12°C
Number of Shelves	4
Effective Capacity	304 L


MODEL RT-158MA-S-PRS

Dimension WxDxH	1500 x 750 x 1100 mm
Electrical Consumption	84 W
Temperature Control	-2°C ~ 12°C
Number of Shelves	4
Effective Capacity	410 L


MODEL RT-188MA-S-PRS

Dimension WxDxH	1800 x 750 x 1100 mm
Electrical Consumption	96 W
Temperature Control	-2°C ~ 12°C
Number of Shelves	6
Effective Capacity	517 L

A-FIT GLASS DOOR SPECIFICATIONS

Category	Product Group	Model Name	Effective Capacity	No. of Shelves	Temperature Control	Electric Consumption	Product Dimension (mm)
							W x D x H
A-fit	Upright (Swing Glass Door)	HR-78MA-SG	569 L	4	-2°C to 12°C	463 W	700 x 800 x 2050
A-fit	Upright (Swing Glass Door)	HR-128MA-SG	1110 L	8	-2°C to 12°C	533 W	1200 x 800 x 2050
A-fit	Upright (Swing Glass Door)	HR-148MA-SG	1310 L	8	-2°C to 12°C	559 W	1400 x 800 x 2050
A-fit	Upright (Swing Glass Door)	HR-188MA-SG	1720 L	12	-2°C to 12°C	609 W	1800 x 800 x 2050
A-fit	Upright (Swing Glass Door)	HR-76MA-SG	467 L	4	-2°C to 12°C	467 W	700 x 650 x 2050
A-fit	Upright (Swing Glass Door)	HR-126MA-SG	866 L	8	-2°C to 12°C	533 W	1200 x 650 x 2050
A-fit	Upright (Swing Glass Door)	HR-146MA-SG	1021 L	8	-2°C to 12°C	559 W	1400 x 650 x 2050
A-fit	U/C (Sliding Glass Door)	RT-126MA-SSG	231 L	4	-2°C to 12°C	295 W	1200 x 600 x 850
A-fit	U/C (Sliding Glass Door)	RT-156MA-SSG	318 L	4	-2°C to 12°C	315 W	1500 x 600 x 850
A-fit	U/C (Sliding Glass Door)	RT-186MA-SSG	401 L	6	-2°C to 12°C	315 W	1800 x 600 x 850
A-fit	U/C (Sliding Glass Door)	RT-128MA-SSG	307 L	4	-2°C to 12°C	247 W	1200 x 750 x 850
A-fit	U/C (Sliding Glass Door)	RT-158MA-SSG	420 L	4	-2°C to 12°C	260 W	1500 x 750 x 850
A-fit	U/C (Sliding Glass Door)	RT-188MA-SSG	502 L	6	-2°C to 12°C	280 W	1800 x 750 x 850
A-fit	Upright (Long Glass Door)	HR-76MA-SLG	467 L	4	-2°C to 12°C	463 W	700 x 650 x 2050
A-fit	Upright (Long Glass Door)	HR-126MA-SLG	866 L	8	-2°C to 14°C	533 W	1200 x 650 x 2050
A-fit	Upright (Long Glass Door)	HR-78MA-SLG	569 L	4	-2°C to 13°C	463 W	700 x 800 x 2050
A-fit	Upright (Long Glass Door)	HR-128MA-SLG	1053 L	8	-2°C to 15°C	533 W	1200 x 800 x 2050
A-fit	U/C (Swing Glass Door)	RT-96MA-SG	151 L	2	-2°C to 12°C	201 W	900 x 600 x 850
A-fit	U/C (Swing Glass Door)	RT-126MA-SG	231 L	4	-2°C to 12°C	229 W	1200 x 600 x 850
A-fit	U/C (Swing Glass Door)	RT-156MA-SG	318 L	4	-2°C to 12°C	241 W	1500 x 600 x 850
A-fit	U/C (Swing Glass Door)	RT-186MA-SG	401 L	6	-2°C to 12°C	264 W	1800 x 600 x 850
A-fit	U/C (Swing Glass Door)	RT-98MA-SG	199 L	2	-2°C to 12°C	201 W	900 x 750 x 850
A-fit	U/C (Swing Glass Door)	RT-128MA-SG	307 L	4	-2°C to 12°C	224 W	1200 x 750 x 850
A-fit	U/C (Swing Glass Door)	RT-158MA-SG	420 L	4	-2°C to 12°C	241 W	1500 x 750 x 850
A-fit	U/C (Swing Glass Door)	RT-188MA-SG	502 L	6	-2°C to 12°C	264 W	1800 x 750 x 850

A-FIT PREP TABLE SPECIFICATIONS

Category	Product Group	Model Name	Effective Capacity	No. of Shelves	Temperature Control	Electric Consumption	Product Dimension (mm)
							W x D x H
A-fit	Prep Table	RT-128MA-S-PR	304 L	4	-2°C to 12°C	81 W	1200 x 750 x 850
A-fit	Prep Table	RT-158MA-S-PR	410 L	4	-2°C to 12°C	84 W	1500 x 750 x 850
A-fit	Prep Table	RT-188MA-S-PR	517 L	6	-2°C to 12°C	96 W	1800 x 750 x 850
A-fit	Prep Table (Cover + Cutting Board)	RT-128MA-S-PRS	304 L	4	-2°C to 12°C	81 W	1200 x 750 x 1076
A-fit	Prep Table (Cover + Cutting Board)	RT-158MA-S-PRS	410 L	4	-2°C to 12°C	84 W	1500 x 750 x 1100
A-fit	Prep Table (Cover + Cutting Board)	RT-188MA-S-PRS	517 L	6	-2°C to 12°C	96 W	1800 x 750 x 1100

A-FIT MODEL

Upright Bakery Refrigerator



MODEL HR-78MA-ST

Dimension WxDxH	700 x 800 x 2050 mm
Electrical Consumption	237 W
Temperature Control	-6°C ~ 12°C
Pitched (W 400 x D 600)	51mm (Max. upper 10 tiers, lower 13 tiers)
Effective Capacity	546 L



MODEL HR-128MA-ST

Dimension WxDxH	1200 x 800 x 2050 mm
Electrical Consumption	343 W
Temperature Control	-6°C ~ 12°C
Pitched (W 400 x D 600)	51mm (Max: Upper 10 Tiers, Lower 13 Tiers)
Effective Capacity	1110 L



MODEL HR-148MA-ST

Dimension WxDxH	1400 x 800 x 2050 mm
Electrical Consumption	343 W
Temperature Control	-6°C ~ 12°C
Pitched (W 400 x D 600)	51mm (Max: Upper 10 Tiers, Lower 13 Tiers)
Effective Capacity	1217 L



MODEL HR-188MA-ST

Dimension WxDxH	1500 x 800 x 2050 mm
Electrical Consumption	413 W
Temperature Control	-6°C ~ 12°C
Pitched (W 400 x D 600)	51mm (Max: Upper 10 Tiers, Lower 13 Tiers)
Effective Capacity	1623 L

Upright Bakery Freezer



MODEL HF-78MA-ST

Dimension WxDxH	700 x 800 x 2050 mm
Electrical Consumption	419 W
Temperature Control	-23°C ~ -7°C
Pitched (W 400 x D 600)	51mm (Max. upper 10 tiers, lower 13 tiers)
Effective Capacity	546 L



MODEL HF-128MA-ST

Dimension WxDxH	1200 x 800 x 2050 mm
Electrical Consumption	700 W
Temperature Control	-23°C ~ -7°C
Pitched (W 400 x D 600)	51mm (Max: Upper 10 Tiers, Lower 13 Tiers)
Effective Capacity	1047 L



MODEL **HF-148MA-ST**

Dimension **WxDxH** 1400 x 800 x 2050 mm
 Electrical Consumption 696 W
 Temperature Control -23°C ~ -7°C
 Pitched (W 400 x D 600) 51mm (Max: Upper 10 Tiers, Lower 13 Tiers)
 Effective Capacity 1203 L



MODEL **HF-188MA-ST**

Dimension **WxDxH** 1500 x 800 x 2050 mm
 Electrical Consumption 917 W
 Temperature Control -23°C ~ -7°C
 Pitched (W 400 x D 600) 51mm (Max: Upper 10 Tiers, Lower 13 Tiers)
 Effective Capacity 1622 L

Undercounter Bakery Refrigerator



MODEL **RT-158MA-ST**

Dimension **WxDxH** 1500 x 750 x 850 mm
 Electrical Consumption 260 W
 Temperature Control -6°C ~ 12°C
 Pitched (W 400 x D 600) 51mm (Max: 9 Tiers)
 Effective Capacity 420 L



MODEL **RT-188MA-ST**

Dimension **WxDxH** 1500 x 800 x 2050 mm
 Electrical Consumption 280 W
 Temperature Control -6°C ~ 12°C
 Pitched (W 400 x D 600) 51mm (Max: 9 Tiers)
 Effective Capacity 502 L

Undercounter Bakery Freezer



MODEL **FT-158MA-ST**

Dimension **WxDxH** 1800 x 750 x 850 mm
 Electrical Consumption 415 W
 Temperature Control -23°C ~ -7°C
 Pitched (W 400 x D 600) 51mm (Max: 9 Tiers)
 Effective Capacity 420 L



MODEL **FT-188MA-ST**

Dimension **WxDxH** 1800 x 800 x 2050 mm
 Electrical Consumption 400 W
 Temperature Control -23°C ~ -7°C
 Pitched (W 400 x D 600) 51mm (Max: 9 Tiers)
 Effective Capacity 502 L

Category	Product Group	Model Name	Effective Capacity	Pitched (W 400 x D 600)	Temperature Control	Electric Consumption	Product Dimension (mm)
							W x D x H
A-fit	Upright Bakery Refrigerator	HR-78MA-ST	546 L	51mm (Max: upper 10 tiers, lower 13 tiers)	-6°C to 12°C	237W	700 X 800 X 2050
A-fit	Upright Bakery Refrigerator	HR-128MA-ST	1110 L	51mm (Max: Upper 10 Tiers, Lower 13 Tiers)	-6°C to 12°C	343W	1200 X 800 X 2050
A-fit	Upright Bakery Refrigerator	HR-148MA-ST	1217 L	51mm (Max: Upper 10 Tiers, Lower 13 Tiers)	-6°C to 12°C	343W	1400 X 800 X 2050
A-fit	Upright Bakery Refrigerator	HR-188MA-ST	1623 L	51mm (Max: Upper 10 Tiers, Lower 13 Tiers)	-6°C to 12°C	413W	1500 X 800 X 2050
A-fit	Upright Bakery Freezer	HF-78MA-ST	546 L	51mm (Max: upper 10 tiers, lower 13 tiers)	-23°C to -7°C	419W	700 X 800 X 2050
A-fit	Upright Bakery Freezer	HF-128MA-ST	1047 L	51mm (Max: Upper 10 Tiers, Lower 13 Tiers)	-23°C to -7°C	700W	1200 X 800 X 2050
A-fit	Upright Bakery Freezer	HF-148MA-ST	1203 L	51mm (Max: Upper 10 Tiers, Lower 13 Tiers)	-23°C to -7°C	696W	1400 X 800 X 2050
A-fit	Upright Bakery Freezer	HF-188MA-ST	1622 L	51mm (Max: Upper 10 Tiers, Lower 13 Tiers)	-23°C to -7°C	917W	1500 X 800 X 2050
A-fit	Undercounter Bakery Refrigerator	RT-158MA-ST	420 L	51mm (Max: 9 Tiers)	-6°C to 12°C	260W	1500 X 750 X 850
A-fit	Undercounter Bakery Refrigerator	RT-188MA-ST	502 L	51mm (Max: 9 Tiers)	-6°C to 12°C	280W	1500 X 750 X 850
A-fit	Undercounter Bakery Freezer	FT-158MA-ST	420 L	51mm (Max: 9 Tiers)	-23°C to -7°C	415W	1800 X 750 X 850
A-fit	Undercounter Bakery Freezer	FT-188MA-ST	502 L	51mm (Max: 9 Tiers)	-23°C to -7°C	400W	1800 X 750 X 850

Upright Refrigerator



MODEL **HRWH77LS4**

Dimension **WxDxH** 700 x 818 x 2050 mm
 Electrical Consumption Rated Power 350W
 Temperature Control -2°C to 12°C
 Number of Shelves 4 pcs
 Effective Capacity 572 L



MODEL **HRWH127LS4**

Dimension **WxDxH** 1200 x 818 x 2050 mm
 Electrical Consumption Rated Power 650W
 Temperature Control -2°C to 12°C
 Number of Shelves 8 pcs
 Effective Capacity 1020 L



MODEL **HRWH147LS4**

Dimension **WxDxH** 1400 x 818 x 2050 mm
 Electrical Consumption Rated Power 650W
 Temperature Control -2°C to 12°C
 Number of Shelves 8 pcs
 Effective Capacity 1272 L

Upright Freezer



MODEL **HFWH77LS4**

Dimension **WxDxH (+Leg)** 700 x 818 x 2050 mm
 Electrical Consumption Rated Power 560W, Defrost heater: 680W X 1 NOS
 Temperature Control -7°C to -25°C
 Number of Shelves 4 pcs
 Effective Capacity 572 L



MODEL **HFWH127LS4**

Dimension **WxDxH** 1200 x 818 x 2050 mm
 Electrical Consumption Rated Power 1100W
 Temperature Control -7°C to -25°C
 Number of Shelves 8 pcs
 Effective Capacity 1020 L



MODEL **HFWH147LS4**

Dimension **WxDxH** 1400 x 818 x 2050 mm
 Electrical Consumption Rated Power 1100W
 Temperature Control -7°C to -25°C
 Number of Shelves 8 pcs
 Effective Capacity 1272 L

Undercounter
Refrigerator
Depth 600 mm



MODEL	RTWH126LS4	RTWH156LS4	RTWH186LS4
Dimension WxDxH	1200 x 600 x 850 mm	1500 x 600 x 850 mm	1800 x 600 x 850 mm
Electrical Consumption	Rated Power 340W	Rated Power 340W	Rated Power 420W
Chiller Temperature Control	-2°C to 12°C	-2°C to 12°C	-2°C to 12°C
Number of Shelves	4 pcs	4 pcs	6 pcs
Effective Capacity	223 L	308 L	386 L

Undercounter
Refrigerator
Depth 750 mm



MODEL	RTWH70LS4	RTWH120LS4	RTWH150LS4
Dimension WxDxH	700 x 750 x 850 mm	1200 x 750 x 850 mm	1500 x 750 x 850 mm
Electrical Consumption	Rated Power 230W	Rated Power 340W	Rated Power 420W
Chiller Temperature Control	-2°C to 12°C	-2°C to 12°C	-2°C to 12°C
Number of Shelves	2 pcs	4 pcs	4 pcs
Effective Capacity	148 L	296 L	408 L



MODEL	RTWH180LS4
Dimension WxDxH	1800 x 750 x 850 mm
Electrical Consumption	Rated Power 420W
Chiller Temperature Control	-2°C to 12°C
Number of Shelves	6 pcs
Effective Capacity	512 L

Undercounter
Freezer
Depth 600 mm



MODEL	FTWH126LS4	FTWH156LS4	FTWH186LS4
Dimension WxDxH	1200 x 600 x 850 mm	1500 x 600 x 850 mm	1800 x 600 x 850 mm
Electrical Consumption	Rated Power 550W	Rated Power 550W	Rated Power 550W
Temperature Control	-23°C to -7°C	-23°C to -7°C	-23°C to -7°C
Number of Shelves	4 pcs	4 pcs	6 pcs
Effective Capacity	223 L	308 L	386 L

Undercounter
Freezer
Depth 750 mm



MODEL	FTWH70LS4	FTWH120LS4	FTWH150LS4
Dimension WxDxH	700 x 750 x 850 mm	1200 x 750 x 850 mm	1500 x 750 x 850 mm
Electrical Consumption	Rated Power 230W	Rated Power 550W	Rated Power 550W
Temperature Control	-23°C to -7°C	-23°C to -7°C	-23°C to -7°C
Number of Shelves	2 pcs	4 pcs	4 pcs
Effective Capacity	148 L	296 L	408 L



MODEL	FTWH180LS4
Dimension WxDxH (+Leg)	1800 x 750 x 850 mm
Electrical Consumption	Rated Power 550W
Temperature Control	-23°C to -7°C
Number of Shelves	6 pcs
Effective Capacity	512 L

U/C
(Swing Glass Door)
Refrigerator
Depth 600 mm



MODEL	RTWH70LS4-GD	RTWH126LS4-GD	RTWH156LS4-GD
Dimension WxDxH	700 x 600 x 850 mm	1200 x 600 x 850 mm	1500 x 600 x 850 mm
Electrical Consumption	Rated Power 230W	Rated Power 340W	Rated Power 340W
Chiller Temperature Control	-2°C to 12°C	-2°C to 12°C	-2°C to 12°C
Number of Shelves	2 pcs	4 pcs	4 pcs
Effective Capacity	148 L	223 L	308 L



MODEL	RTWH186LS4-GD
Dimension WxDxH	1800 x 600 x 850 mm
Electrical Consumption	Rated Power 420W
Chiller Temperature Control	-2°C to 12°C
Number of Shelves	6 pcs
Effective Capacity	386 L

Prep Table
Depth 600 mm



MODEL	RTWH126LS4-GNT	RTWH156LS4-GNT	RTWH186LS4-GNT
Dimension WxDxH	1200 x 600 x 865 mm	1500 x 600 x 865 mm	1800 x 600 x 865 mm
Electrical Consumption	Rated Power 340W	Rated Power 340W	Rated Power 420W
Chiller Temperature Control	-2°C to 12°C	-2°C to 12°C	-2°C to 12°C
Number of Shelves	223 L	4 pcs	6 pcs
Effective Capacity	4 pcs	308 L	386 L

Prep Table
Depth 750 mm



MODEL	RTWH120LS4-GNT	RTWH150LS4-GNT	RTWH180LS4-GNT
Dimension WxDxH	1200 x 750 x 865 mm	1500 x 750 x 865 mm	1800 x 750 x 865 mm
Electrical Consumption	Rated Power 340W	Rated Power 420W	Rated Power 420W
Chiller Temperature Control	-2°C to 12°C	-2°C to 12°C	-2°C to 12°C
Number of Shelves	4 pcs	4 pcs	6 pcs
Effective Capacity	296 L	408 L	512 L

A1-FIT MODEL SPECIFICATIONS

Category	Product Group	Model Name	Effective Capacity	No. of Shelves	Temperature Control	Electric Consumption	Product Dimension (mm)
							W x D x H
A1-fit	Upright Refrigerator	HRWH77LS4	572 L	4	-2°C to 12°C	350W	700 x 818 x 2050 mm
A1-fit	Upright Refrigerator	HRWH127LS4	1020 L	8	-2°C to 12°C	650W	1200 x 818 x 2050 mm
A1-fit	Upright Refrigerator	HRWH147LS4	1272 L	8	-2°C to 12°C	650W	1400 x 818 x 2050 mm
A1-fit	Upright Freezer	HFWH77LS4	572 L	4	-7°C to -25°C	560W	700 x 818 x 2050 mm
A1-fit	Upright Freezer	HFWH127LS4	1020 L	8	-7°C to -25°C	1100W	1200 x 818 x 2050 mm
A1-fit	Upright Freezer	HFWH147LS4	1272 L	8	-7°C to -25°C	1100W	1400 x 818 x 2050 mm
A1-fit	Undercounter Refrigerator	RTWH126LS4	223 L	4	-2°C to 12°C	340W	1200 x 600 x 850 mm
A1-fit	Undercounter Refrigerator	RTWH156LS4	308 L	4	-2°C to 12°C	340W	1500 x 600 x 850 mm
A1-fit	Undercounter Refrigerator	RTWH186LS4	386 L	6	-2°C to 12°C	420W	1800 x 600 x 850 mm
A1-fit	Undercounter Refrigerator	RTWH70LS4	148 L	2	-2°C to 12°C	230W	700 x 750 x 850 mm
A1-fit	Undercounter Refrigerator	RTWH120LS4	296 L	4	-2°C to 12°C	340W	1200 x 750 x 850 mm
A1-fit	Undercounter Refrigerator	RTWH150LS4	408 L	4	-2°C to 12°C	420W	1500 x 750 x 850 mm
A1-fit	Undercounter Refrigerator	RTWH180LS4	512 L	6	-2°C to 12°C	420W	1800 x 750 x 850 mm
A1-fit	Undercounter Freezer	FTWH126LS4	223 L	4	-23°C to -7°C	550W	1200 x 600 x 850 mm
A1-fit	Undercounter Freezer	FTWH156LS4	308 L	4	-23°C to -7°C	550W	1500 x 600 x 850 mm
A1-fit	Undercounter Freezer	FTWH186LS4	386 L	6	-23°C to -7°C	550W	1800 x 600 x 850 mm
A1-fit	Undercounter Freezer	FTWH70LS4	148 L	2	-23°C to -7°C	230W	700 x 750 x 850 mm
A1-fit	Undercounter Freezer	FTWH120LS4	296 L	4	-23°C to -7°C	550W	1200 x 750 x 850 mm
A1-fit	Undercounter Freezer	FTWH150LS4	408 L	4	-23°C to -7°C	550W	1500 x 750 x 850 mm
A1-fit	Undercounter Freezer	FTWH180LS4	512 L	6	-23°C to -7°C	550W	1800 x 750 x 850 mm

A1-FIT MODEL SPECIFICATIONS

Category	Product Group	Model Name	Effective Capacity	No. of Shelves	Temperature Control	Electric Consumption	Product Dimension (mm)
							W x D x H
A1-fit	U/C (Swing Glass Door) Refrigerator	RTWH70LS4-GD	148 L	2	-2°C to 12°C	230 W	700 x 600 x 850 mm
A1-fit	U/C (Swing Glass Door) Refrigerator	RTWH126LS4-GD	223 L	4	-2°C to 12°C	340 W	1200 x 600 x 850 mm
A1-fit	U/C (Swing Glass Door) Refrigerator	RTWH156LS4-GD	308 L	4	-2°C to 12°C	340 W	1500 x 600 x 850 mm
A1-fit	U/C (Swing Glass Door) Refrigerator	RTWH186LS4-GD	386 L	6	-2°C to 12°C	420 W	1800 x 600 x 850 mm
A1-fit	Prep Table	RTWH126LS4-GNT	223 L	4	-2°C to 12°C	340 W	1200 x 600 x 865 mm
A1-fit	Prep Table	RTWH156LS4-GNT	308 L	4	-2°C to 12°C	340 W	1500 x 600 x 865 mm
A1-fit	Prep Table	RTWH186LS4-GNT	386 L	6	-2°C to 12°C	420 W	1800 x 600 x 865 mm
A1-fit	Prep Table	RTWH120LS4-GNT	296 L	4	-2°C to 12°C	340 W	1200 x 750 x 865 mm
A1-fit	Prep Table	RTWH150LS4-GNT	408 L	4	-2°C to 12°C	420 W	1500 x 750 x 865 mm
A1-fit	Prep Table	RTWH180LS4-GNT	512 L	6	-2°C to 12°C	420 W	1800 x 750 x 865 mm

GOLDLINE MODEL

Undercounter
Drawer Refrigerator
Depth 600mm



MODEL	RTC-125DNA-GN-6D	RTC-167DNA-GN-9D
Dimension WxDxH	1250 x 600 x 850 mm	1670 x 600 x 850 mm
Electrical Consumption	315 W	315 W
Temperature Control	-6°C ~ 12°C	-6°C ~ 12°C
Number of Drawers	6	9
Effective Capacity	218 L	324 L

Undercounter
Drawer Refrigerator
Depth 750mm



MODEL	RTC-90DDA-GN-2D	RTC-90DDA-GN-3D	RTC-125DDA-GN-4D
Dimension WxDxH (+Leg)	900 x 750 x 850 mm	900 x 750 x 850 mm	1250 x 750 x 850 mm
Electrical Consumption	225 W	225 W	315 W
Temperature Control	-6°C ~ 12°C	-6°C ~ 12°C	-6°C ~ 12°C
Number of Drawers	2	3	4
Effective Capacity	176 L	176 L	296 L

GOLDLINE MODEL

Undercounter
Drawer Refrigerator
Depth 750mm



MODEL	RTC-125DDA-GN-6D	RTC-167DDA-GN-6D	RTC-167DDA-GN-9D
Dimension WxDxH (+Leg)	1250 x 750 x 850 mm	1670 x 750 x 850 mm	1670 x 750 x 850 mm
Electrical Consumption	315 W	315 W	315 W
Temperature Control	-6°C ~ 12°C	-6°C ~ 12°C	-6°C ~ 12°C
Number of Drawers	6	6	9
Effective Capacity	296 L	443 L	443 L

Undercounter
Drawer Freezer
Depth 600mm



MODEL	FTC-125DNA-GN-6D	FTC-167DNA-GN-9D
Dimension WxDxH (+Leg)	1250 x 600 x 850 mm	1670 x 600 x 850 mm
Electrical Consumption	560 W	619 W
Temperature Control	-25°C ~ -7°C	-25°C ~ -7°C
Number of Drawers	6	9
Effective Capacity	218 L	324 L

Undercounter
Drawer Freezer
Depth 750mm



MODEL	FTC-90DDA-GN-2D	FTC-90DDA-GN-3D	FTC-125DDA-GN-4D
Dimension WxDxH (+Leg)	900 x 750 x 850 mm	900 x 750 x 850 mm	1250 x 750 x 850 mm
Electrical Consumption	225 W	225 W	560 W
Temperature Control	-25°C ~ -7°C	-25°C ~ -7°C	-25°C ~ -7°C
Number of Drawers	2	3	4
Effective Capacity	176 L	176 L	296 L

Undercounter Drawer Freezer Depth 750mm



MODEL	FTC-125DDA-GN-6D	FTC-167DNA-GN-6D	FTC-167DDA-GN-9D
Dimension WxDxH (+Leg)	1250 x 750 x 850 mm	1670 x 750 x 850 mm	1670 x 750 x 850 mm
Electrical Consumption	560 W	619 W	619 W
Temperature Control	-25°C ~ -7°C	-25°C ~ -7°C	-25°C ~ -7°C
Number of Drawers	6	6	9
Effective Capacity	296 L	443 L	443 L

GOLDLINE MODEL SPECIFICATIONS

Category	Product Group	Model Name	Effective Capacity	No. of Drawers	Temperature Control	Electric Consumption	Product Dimension (mm) W x D x H
Goldline	Undercounter Drawer Refrigerator Depth 600mm	RTC-125DNA-GN-6D	218 L	6	-6°C to 12°C	315 W	1250 x 600 x 850
Goldline		RTC-167DNA-GN-9D	324 L	9	-6°C to 12°C	315 W	1670 x 600 x 850
Goldline	Undercounter Drawer Refrigerator Depth 750mm	RTC-90DDA-GN-2D	176 L	2	-6°C to 12°C	225 W	900 x 750 x 850
Goldline		RTC-90DDA-GN-3D	176 L	3	-6°C to 12°C	225 W	900 x 750 x 850
Goldline		RTC-125DDA-GN-4D	296 L	4	-6°C to 12°C	315 W	1250 x 750 x 850
Goldline		RTC-125DDA-GN-6D	296 L	6	-6°C to 12°C	315 W	1250 x 750 x 850
Goldline		RTC-167DDA-GN-6D	443 L	6	-6°C to 12°C	315 W	1670 x 750 x 850
Goldline		RTC-167DDA-GN-9D	443 L	9	-6°C to 12°C	315 W	1670 x 750 x 850
Goldline	Undercounter Drawer Freezer Depth 600mm	FTC-125DNA-GN-6D	218 L	6	-25°C to -7°C	560 W	1250 x 600 x 850
Goldline		FTC-167DNA-GN-9D	324 L	9	-25°C to -7°C	619 W	1670 x 600 x 850
Goldline	Undercounter Drawer Freezer Depth 750mm	FTC-90DDA-GN-2D	176 L	2	-25°C to -7°C	225 W	900 x 750 x 850
Goldline		FTC-90DDA-GN-3D	176 L	3	-25°C to -7°C	225 W	900 x 750 x 850
Goldline		FTC-125DDA-GN-4D	296 L	4	-25°C to -7°C	560 W	1250 x 750 x 850
Goldline		FTC-125DDA-GN-6D	296 L	6	-25°C to -7°C	560 W	1250 x 750 x 850
Goldline		FTC-167DNA-GN-6D	443 L	6	-25°C to -7°C	619 W	1670 x 750 x 850
Goldline		FTC-167DDA-GN-9D	443 L	9	-25°C to -7°C	619 W	1670 x 750 x 850

Keeping food at an ultra-low temperature of -60°C suppresses enzymatic decomposition of proteins and oxidation of fats. It also prevents discoloration and deterioration of texture caused by freezer burn. With ultra-low temperature deep freezer, quality of food is assured for your customers to enjoy their feast.




MODEL	HDF-140A-SEA	HDF-300A-SEA	HDF-400A-SEA
Dimension WxDxH	725 x 693 x 875 mm	1265 x 710 x 875 mm	1565 x 710 x 875 mm
Electrical Consumption	230 W	320 W	330 W
Temperature Control (approx.)	-60°C ~ -50°C	-60°C ~ -50°C	-60°C ~ -50°C
Effective Capacity	140 L	298 L	385 L
Refrigerant	R600, R1150	R600, R1150	R600, R1150

DEEP FREEZER SPECIFICATIONS

Category	Model Name	Effective Capacity	Temperature Control	Electric Consumption	Product Dimension (mm) W x D x H
Deep Freezer	HDF-140A-SEA	140 L	-60°C ~ -50°C	230 W	725 x 693 x 875
Deep Freezer	HDF-300A-SEA	298 L	-60°C ~ -50°C	320 W	1265 x 710 x 875
Deep Freezer	HDF-400A-SEA	385 L	-60°C ~ -50°C	330 W	1565 x 710 x 875

Comes with Stainless Steel Work Top

Refrigerated sushi showcases functions to ensure the freshness of produce and as a point of attraction when placed on the sushi counter. Hoshizaki's sushi showcases are designed with curved glass provide an aesthetic edge while its powerful cooling performance with stable humidity and temperature control keeps sushi fresh without drying it out. Left or right option refrigerant panel ensure flexibility of placement on the counter.

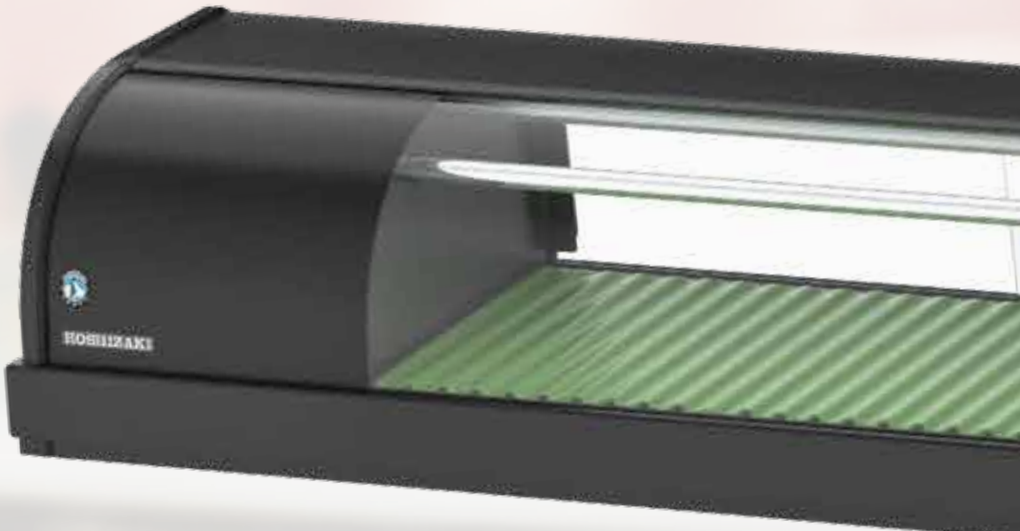

MODEL	HNC-120BE-L-B
Dimension WxDxH	1200 x 345 x 270 mm
Electrical Consumption	150 W
Saturation Ambient Temp 27°C	approx. 4°C
Door (Sliding Glass) WxH	2 (435 x 172 mm)
Effective Capacity	42 L



MODEL	HNC-120BE-R-B
Dimension WxDxH	1200 x 345 x 270 mm
Electrical Consumption	150 W
Saturation Ambient Temp 27°C	approx. 4°C
Door (Sliding Glass) WxH	2 (435 x 172 mm)
Effective Capacity	42 L



MODEL	HNC-150BE-L-B
Dimension WxDxH	1500 x 345 x 270 mm
Electrical Consumption	150 W
Saturation Ambient Temp 27°C	approx. 4°C
Door (Sliding Glass) WxH	4 (293 x 172 mm)
Effective Capacity	57 L



MODEL	HNC-150BE-R-B
Dimension WxDxH	1200 x 345 x 270 mm
Electrical Consumption	150 W
Saturation Ambient Temp 27°C	approx. 4°C
Door (Sliding Glass) WxH	4 (293 x 172 mm)
Effective Capacity	57 L



MODEL	HNC-180BE-L-B
Dimension WxDxH	1800 x 345 x 270 mm
Electrical Consumption	150 W
Saturation Ambient Temp 27°C	approx. 4°C
Door (Sliding Glass) WxH	4 (368 x 172 mm)
Effective Capacity	72 L



MODEL	HNC-180BE-R-B
Dimension WxDxH	1800 x 345 x 270 mm
Electrical Consumption	150 W
Saturation Ambient Temp 27°C	approx. 4°C
Door (Sliding Glass) WxH	4 (368 x 172 mm)
Effective Capacity	72 L



MODEL	HNC-210BE-L-B
Dimension WxDxH	2100 x 345 x 270 mm
Electrical Consumption	150 W
Saturation Ambient Temp 27°C	approx. 4°C
Door (Sliding Glass) WxH	4 (443 x 172mm)
Effective Capacity	87 L



MODEL	HNC-210BE-R-B
Dimension WxDxH	2100 x 345 x 270 mm
Electrical Consumption	150 W
Saturation Ambient Temp 27°C	approx. 4°C
Door (Sliding Glass) WxH	4 (443 x 172mm)
Effective Capacity	87 L



SUSHI SHOWCASE SPECIFICATIONS

Category	Model Name	Effective Capacity	Saturation Ambient	Pull Down Time	Electric Consumption	Product Dimension (mm)
			Temperature 27°C			W x D x H
Showcase	HNC-120BE-L/R-B	42 L	approx. 4°C	approx. 30min (30°C > 10°C)	150W	1200 x 345 x 270
Showcase	HNC-150BE-L/R-B	57 L	approx. 4°C	approx. 30min (30°C > 10°C)	150W	1500 x 345 x 270
Showcase	HNC-180BE-L/R-B	72 L	approx. 4°C	approx. 30min (30°C > 10°C)	150W	1800 x 345 x 270
Showcase	HNC-210BE-L/R-B	87L	approx. 4°C	approx. 30min (30°C > 10°C)	150W	2100 x 345 x 270

Refrigerator Display Case - Not For Overnight Storage

DISHWASHER

Hoshizaki introduces the high performance and low water consumption efficient dishwashing solution for your busy kitchen. Simple and compact in size, our dishwasher is designed to take the load off your operations with an easy to operate unit for small to medium size establishments.



Hood



MODEL **HW-600B3**

HW-600B

Dimension **WxDxH (Door Opening)** 707 x 779 x 1485 (1948) mm
 Electrical Consumption 9.7 - 11.5 kW
 Washing Capacity **Racks per Hour** 69 / 35 / 27 / 23 / 18
 Water Consumption **Per Rack** 2.3 L
 Power supply 3phase 380-415V / 50Hz
 Max Noise 67 dBA

707 x 779 x 1485 (1948) mm
 3.4 - 4.0 kW
 69 / 35 / 27 / 23 / 18
 2.3 L
 1phase 220-240V / 50Hz
 67 dBA

DISHWASHER

Hood



MODEL **OBM 1080T**

HW-320B

Dimension **WxDxH (Door Opening)** 700 x 785 x 1480 (1960) mm
 Electrical Consumption 9.7 - 11.4 kW
 Washing Capacity **Racks per Hour** 69 / 35 / 27 / 23 / 18
 Water Consumption **Per Rack** 2.8 L
 Power supply 3phase 380-415V / 50Hz
 Max Noise 75 dBA

600 x 655 x 830 mm
 5.0 - 5.8 kW
 35 / 27 / 23 / 20 / 18
 2.3 L
 1phase 220-240V / 50Hz
 65 dBA

Undercounter



MODEL **HW-320B-S**

OBY 50T

Dimension **WxDxH** 595 x 645 x 830 mm
 Electrical Consumption 5.2 - 6.1 kW
 Washing Capacity **Racks per Hour** 35 / 27 / 23 / 20 / 18
 Water Consumption **Per Rack** 2.3 L
 Power supply 1phase 220-240V / 50Hz
 Max Noise 70 dBA

595 x 645 x 830 mm
 5.3 - 6.1kW
 35 / 27 / 23 / 20 / 18
 2.8 L
 1phase 220-240V / 50Hz
 70 dBA

DISHWASHER SPECIFICATIONS

Category	Product Group	Model Name	Temperature Control		Water Consumption Per Rack	Electric Consumption	Maximum Noise	Product Dimension (mm)
			Washing (°C)	Rinsing (°C)				W x D x H
Dishwasher	Hood	HW-600B3	55 - 60	80 - 85	2.3 L	9.7 - 11.5 kW	67dBA	707 x 779 x 1485(1948)
Dishwasher	Hood	HW-600B	55 - 60	80 - 85	2.3 L	3.4 - 4.0 kW	67dBA	707 x 779 x 1485 (1948)
Dishwasher	Hood	OBM 1080T	55 - 60	80 - 85	2.8 L	9.7 - 11.5 kW	75dBA	700 x 785 x 1480 (1960)
Dishwasher	Undercounter	HW-320B	55 - 60	80 - 85	2.3 L	5.0 - 5.8 kW	65dBA	600 x 655 x 830
Dishwasher	Undercounter	HW-320B-S	55 - 60	80 - 85	2.3 L	5.2 - 6.1 kW	70dBA	595 x 645 x 830
Dishwasher	Undercounter	OBY 50T	55 - 60	80 - 85	2.8 L	5.3 - 6.1 kW	70dBA	595 x 645 x 830

Drain pump (T), Rinsing Pump (R), Detergent pump (D), Rinse aid pump (P) are optional parts.

BEER DISPENSER



Automatic draft beer dispenser

beer dispenser



MODEL	DBF-AS65WE-T	DBF-25SAC	DBF-40SAC
Dimension WxDxH	367 x 674 x 764 mm	255 x 587 x 460 mm	330 x 646 x 510 mm
Electric Consumption	285 W	196 W	210 W
Dipensing Capacity	65L (30°C - 8°C 4H)	25L (30°C - 8°C 4H)	330 x 646 x 510 mm
Power Supply	1phase 220-240V, 50/60Hz	1phase 220-240V, 50Hz	1phase 220-240V, 50Hz

BEER DISPENSER SPECIFICATIONS

Category	Product Group	Model Name	Power Supply	Electric Consumption	Dipensing Capacity	Product Dimension (mm) W x D x H
Beer Dispenser	Automatic Draft Beer Dispenser	DBF-AS65WE-T	1phase 220-240V, 50/60Hz	285 W	65L (30°C - 8°C 4H)	367 x 674 x 764 mm
Beer Dispenser	Beer Dispenser	DBF-25SAC	1phase 220-240V, 50Hz	196 W	25L (30°C - 8°C 4H)	255 x 587 x 460 mm
Beer Dispenser	Beer Dispenser	DBF-40SAC	1phase 220-240V, 50Hz	210 W	330 x 646 x 510 mm	330 x 646 x 510 mm

ELECTRIC FRYER



Fine control of oil temperature and good oil quality make you experience delicious fried food that are crispy, juicy without losing the original flavour of your ingredients. Besides taking care of the gastronomists, we care for the people behind the good food as well with our easy-to-clean design.



MODEL	FL-20B-SEA
Dimension WxDxH	450 x 590 x 800 (overall height 920) mm
Cooking Dimension WxD	390 x 376 mm
Power Supply	3 Phase 4 Wire 380 / 400 / 415V 50Hz
Amperage	8.5A / 9.0A / 9.2A
Electric Consumption	5.6kW / 6.2kW / 6.6kW
Oil Heating Time (Approx.)	15 min (AT30°C , Oil Amount 20L, Oil Temperature 20°C to 180°C)
Oil Amount Per Cycle	20 L

ELECTRIC FRYER SPECIFICATIONS

Category	Model Name	Oil Amount	Power Supply	Amperage	Electric Consumption	Product Dimension (mm) W x D x H
Fryer	FL-20B-SEA	20 L	3 Phase 4 Wive 380 / 400 / 415V 50Hz	8.5A / 9.0A / 9.2A	5.6kW / 6.2kW / 6.6kW	450 x 590 x 800