



HOSHIZAKI

> DCM-60KE

Daily ice production capacity up to 60KG

> DCM-120KE

Daily ice production capacity up to 125KG





Cold drinks are very much favoured especially in casual or self-service environments; operators can lessen the work or manpower with an ice dispensing machine. Hoshizaki's cubelet ice dispensers meet the need with its 2-in-1 function that makes and provides ice to customers through its compact and space saving dispensers.



ICE DISPENSER SERIES

FEATURES


- > push lever dispensing system
- > adjustable portion control to reduce energy consumption and wastage
- > auger system brings water consumption equal to ice production
- > easy to clean and maintain
- > direct dispensing reduces risk of contamination
- > compact with reduced space requirements
- > clean and hygienic

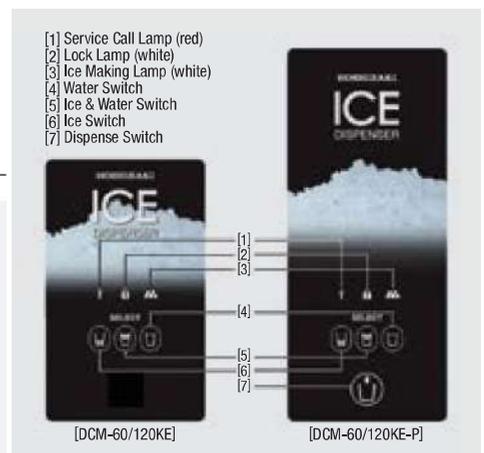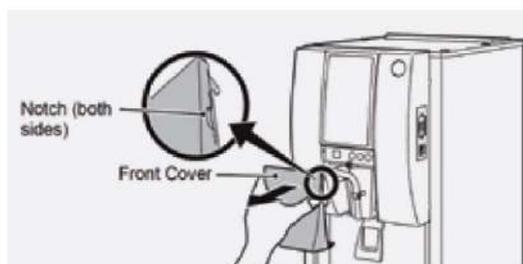


DIMENSIONS & SPECIFICATION

CUBELET ICE DISPENSER AIR SYSTEM


TOP SIDE

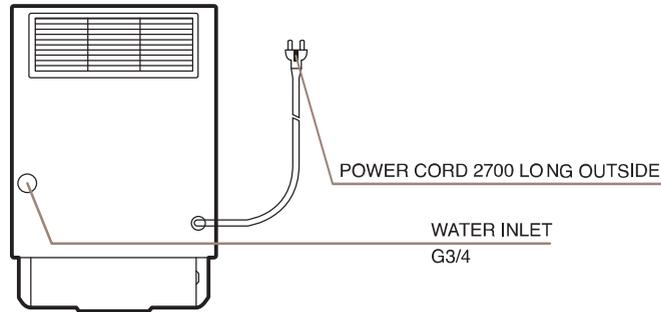

FRONT SIDE

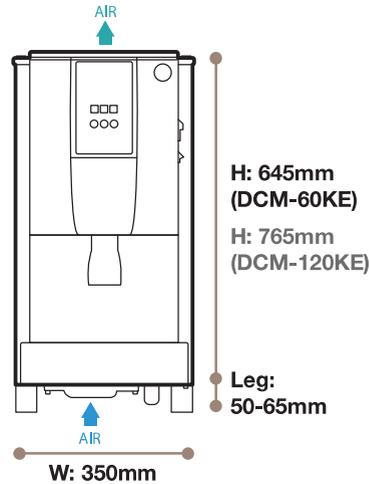

RIGHT SIDE

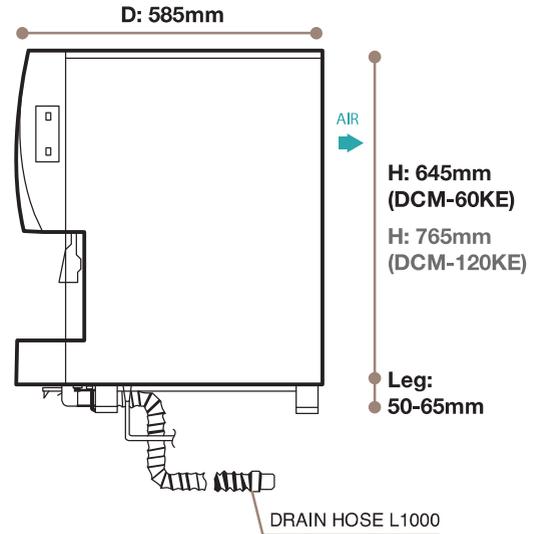

MODEL NAME	DCM-60KE	DCM-120KE	
ICE SHAPE	Cubelet (Compressed Flake Ice)		
DIMENSIONS (MM) (W x D x H)	Body : 350 x 585 x 645 / Leg Height : 50-65 mm	Body : 350 x 585 x 765 / Leg Height : 50-65 mm	
PACKED DIMENSIONS (MM) (W x D x H)	440 x 655 x 931	440 x 655 x 1051	
WEIGHT (NETT/GROSS)	47KG / 56 KG	57 KG / 66 KG	
AMPERAGE / STARTING AMPERAGE	1.5A / 9.5A	2.8A / 12.6A	
ELECTRICAL CONSUMPTION	280 W	480 W	
REFRIGERANT CHARGE	R134a		
HEAT REJECTION	460 W (396 kcal/h)	980 W (843 kcal/h)	
ICE PRODUCTION PER 24H (15MM)	(AT10°C/WT10°C)	60 KG	125 KG
	(AT21°C/WT15°C)	50 KG	105 KG
	(AT32°C/WT21°C)	38 KG	85 KG
ICE DISPENSING RATE (40G / CUP)	(AT10°C/WT10°C)	APPROX: 78 CUPS / 30 MIN	APPROX: 165 CUPS / 30 MIN
	(AT21°C/WT15°C)	APPROX: 73 CUPS / 30 MIN	APPROX: 154 CUPS / 30 MIN
	(AT32°C/WT21°C)	APPROX: 67 CUPS / 30 MIN	APPROX: 144 CUPS / 30 MIN
WATER CONSUMPTION PER 24H (AT32°C/WT21°C)	0.038 m ³	0.085 m ³	
	1L / 1KG ICE	1L / 1KG ICE	
STORAGE CAPACITY	1.9 KG	4.0 KG	

• **WARRANTY:**
Two years parts & labour for entire unit, 3rd year on compressor only. Excluding door & exterior damages

• **OPERATING CONDITIONS:** • Rated Voltage : ±6% • Ambient Temperature: 5°-40°C
• Water Supply: 5°-35°C / 0.05-0.78 Mpa • AC Supply Voltage: 1/220-240V / 50 Hz

RI