EARTH WIRE 2800 LONG OUTSIDE

BEVERAGE CIRCUIT 700 LONG OUTSIDE

BUZZER CABLE 2400 LONG OUTSIDE

(WITH L-SHAPED PLUG)

POWER CORD 2800 LONG OUTSIDE


3. This drawing shows a system for undercounter application. Product code: (Body)W060-C101. (Kit)W064-D002


1. Install the product properly in accordance with the instructions on location, water supply/drain

260

1. Install the product properly in accordance with the instructions on location, water supply/drain connections and electrical connections stated in the instruction and installation manuals provided. Allow 10mm extra space at the installation site to meet any installation requirements (additional spacing is also required for proper air flow and pipe connections).

2. Provide a permanent water purifier to the external water supply line. The water purifier must be QL3-4CB5 made by Everpure.

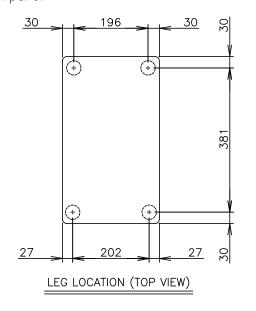

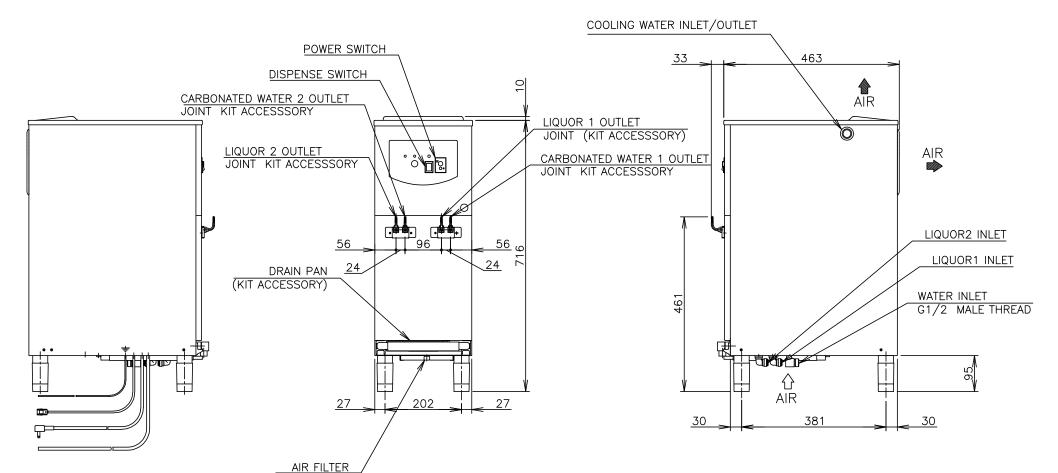

WATER INLET

LIQUOR 1 INLET

LIQUOR 2 INLET

HOSHIZAKI

[ITEM	Hoshizaki Carbonate	d Water Dispenser							
Ī	MODEL	DS-25WLD								
Λ	POWER SUPPLY	1 Phase 100V 50/60Hz (00V 50/60Hz Capacity:0.48kVA(4.8A)							
	AMPERAGE	Running: 3.3/3.5A Rated Motor: 3.3/3.5A Starting: 19/19A 250/295W(Power Factor: 76/84%) 2.8m(with L—shaped Plug) 260mm(W) x 496mm(D) x 716mm(H) Stainless Steel(Front Panel). Painted Steel(Cabinet) ABS Plastic(Top Panel)								
	ELECTRIC CONSUMPTION									
	POWER CORD									
	OUTSIDE DIMENSIONS									
	EXTERIOR									
	BEVERAGE CIRCUIT									
	DISPENSING CAPACITY	25L(25℃→8℃)/6h(Carbonated Water: Liquor=2:								
	ICE STORAGE CAPACITY	Approx 4kg								
	PULLDOWN TIME	4.5h or less (Initial Cooling Water 25℃→Ice Storag								
	RECOVERY TIME	3h or less (Ice Restorage)								
	REFRIGERATION SYSTEM	Ice Bank System								
	AGITATION SYSTEM	Pump Motor Circulation System								
	WATER SUPPLY	Direct Connection to Water Main, G1,								
	COMPRESSOR	Hermetic 75W								
	CONDENSER	Fin and Tube Type, Air—cooled								
	HEAT REJECTION	,								
	REFRIGERANT CONTROL									
	REFRIGERANT	R134a								
	ICE STORAGE CONTROL	Electrode								
	CARBONATOR TANK CONTROL	Float	Microprocessor							
	ELECTRIC CIRCUIT PROTECTION	Earth Wire Motor Protector (Auto-reset) Motor Protector (Auto-reset)								
	REFRIGERANT CIRCUIT PROTECTION									
	AGITATOR PUMP MOTOR PROTECTION									
	CARBONATOR PUMP MOTOR PROTECTION	Timer (Manual—reset)								
	LEG	Plastic Adjustable 89 — 104 mm 35kg (Gross (Body)41kg. (Kit)2kg)								
	WEIGHT									
	PACKAGE	Carton (Body) 330mm(W) x 610mm(D) x 870mm(H) (Kit) 300mm(W) x 500mm(D) x 100mm(H)								
	ACCESSORIES	CO2 Gas Circuit (Pressure Reducing Valve, Hose, Hose Joint CO2 Gas Cylinder Fittings (Round Spanner, Chain Cleaning Utensil (Brush), Drain Pan Water Supply Circuit (Pressure Reducing Valve)								
	OPERATING	Ambient Temperature: :5 - 35°, Voltage Range: Rated Voltage ±10% Water Supply Pressure: 0.05 - 0.78 MPa (gauge)								
	CONDITIONS	CO2 Gas Pressure: 0.54MPa(Carbonator) 0.10 - 0.35MPa(Gas Pump, Gallon Tank)								
	*We reserve the right to make changes in specifications and design without prior notice.									

*We reserve the right to make changes in specifications and design without prior notice.

HOSHIZAKI CARBONATED WATER DISPENSER DS-25WLD

APPROVED YAMAGUCHI	0111	CKED SHIRO	DESIGNED MARUYAMA		AWN HASHI	SCALE 1	/10	TRIGON	OMETRY
YAMAGUCH MARU	YAMA	\triangle	2024.11.	21	DATE	1 10 01	DRAWING N	770	SYMBOL
APPROVED DESIG	GNED	SYMBOL	DATE		2024	1.10.04	 040	1/6	