


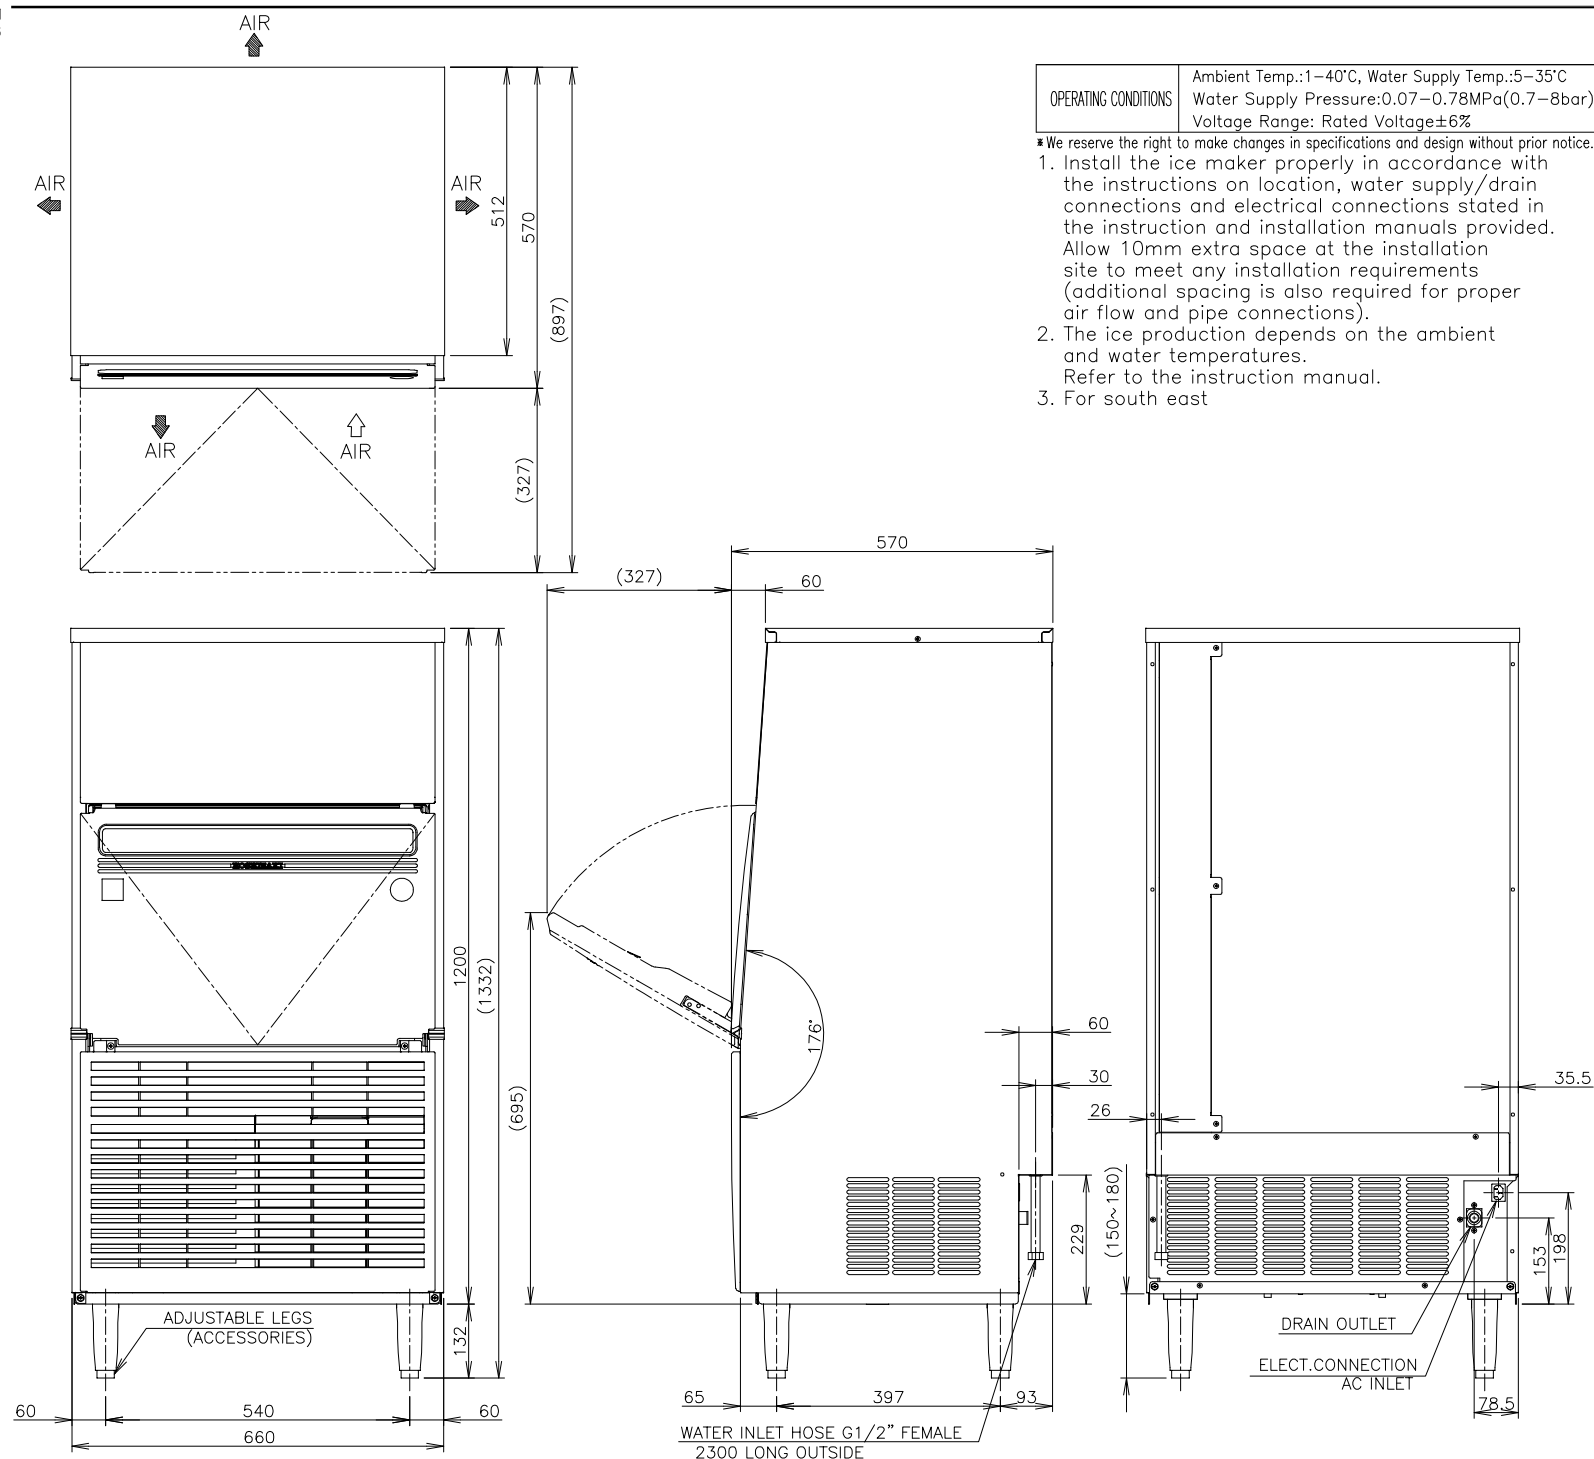

ITEM	Hoshizaki Cube Ice Maker		
MODEL	IM-100A-23		
AC SUPPLY VOLTAGE	1 PHASE 220-240V 50Hz		
AMPERAGE	4.8A (AT.32°C, WT.21°C)		
STARTING AMPERAGE	18.4A		
ELECTRIC CONSUMPTION	680W (AT.32°C, WT.21°C)		
POWER FACTOR	59%		
POWER SUPPLY CAPACITY	Min. 1.53kVA (6.4A)		
ICE PRODUCTION PER 24h	Approx. 90kg (5mm) / 96kg (15mm) (AT.10°C, WT.10°C) Approx. 88kg (5mm) / 92kg (15mm) (AT.21°C, WT.15°C) Approx. 73kg (5mm) / 78kg (15mm) (AT.32°C, WT.21°C)		
WATER CONSUMPTION PER 24h	Approx. 0.45m³(5mm)(AT.10°C, WT.10°C) Approx. 0.24m³(5mm) (AT.21°C, WT.15°C) Approx. 0.22m³(5mm) (AT.32°C, WT.21°C)		
SHAPE OF ICE	Cube Approx. 28×28×23mm		
FREEZE CYCLE TIME	Approx. 25min (5mm) (AT.21°C, WT.15°C)		
ICE PRODUCTION PER CYCLE	1.3kg/80pcs.(5mm) (AT.21°C, WT.15°C)		
MAX STORAGE CAPACITY	52kg(Bin Control Setting Approx. 34kg)		
DIMENSIONS	660mm(W) x 570mm(D) x 1200mm(H)		
EXTERIOR	Stainless Steel, Plastic Door & Louver, Galvanized Steel(Rear)		
INSULATION	Polyurethane Foam		
INSULATION FOAM BLOWING AGENT	Cyclopentane		
CONNECTIONS -ELECTRIC	X-Type Connection		
CONNECTIONS -WATER SUPPLY	Inlet G1/2" (connected at rear side)		
CONNECTIONS-DRAIN	Outlet I.D. φ22mm (connected at rear side)		
ICE MAKING SYSTEM	Cell type		
HARVESTING SYSTEM	Hot Gas Defrost		
COMPRESSOR	Hermetic		
CONDENSER	Air-cooled		
HEAT REJECTION	1335W 1150kcal/h		
EVAPORATOR	Tin-plated Copper Tube on Sheet and Cells		
REFRIGERANT CONTROL	Thermostatic Expansion Valve		
REFRIGERANT CHARGE	R404A / 400g		
ICE MAKING CONTROL SYSTEM	Thermistor, Timer		Controller Board
HARVESTING CONTROL SYSTEM	Thermistor		
BIN CONTROL SYSTEM	Microswitch with Time Delay		
ICE MAKING WATER CONTROL SYSTEM	Timer, Water Pan's movement		
ELECTRICAL PROTECTION	Class I Appliance, 5A Fuse		
COMPRESSOR PROTECTION	Auto-reset Overload Protector		
ICE MAKER PROTECTION	Interlock by Controller Board		
WEIGHT	Net weight 76kg/Gross weight 95kg		
PACKAGE	Carton 760mm(W) x 680mm(D) x 1379mm(H)		
ACCESSORIES	Scoop, Leg, Installation Kit		