


1. Install the ice maker properly in accordance with the instructions on location, water supply/drain connections and electrical connections stated in the instruction and installation manuals provided. Allow 10mm extra space at the installation site to meet any installation requirements (additional spacing is also required for proper air flow and pipe connections).
2. The ice production depends on the ambient and water temperatures. Refer to the instruction manual.
3. Product code: M028X2, G008, S-21873
4. For HMY specific agency.

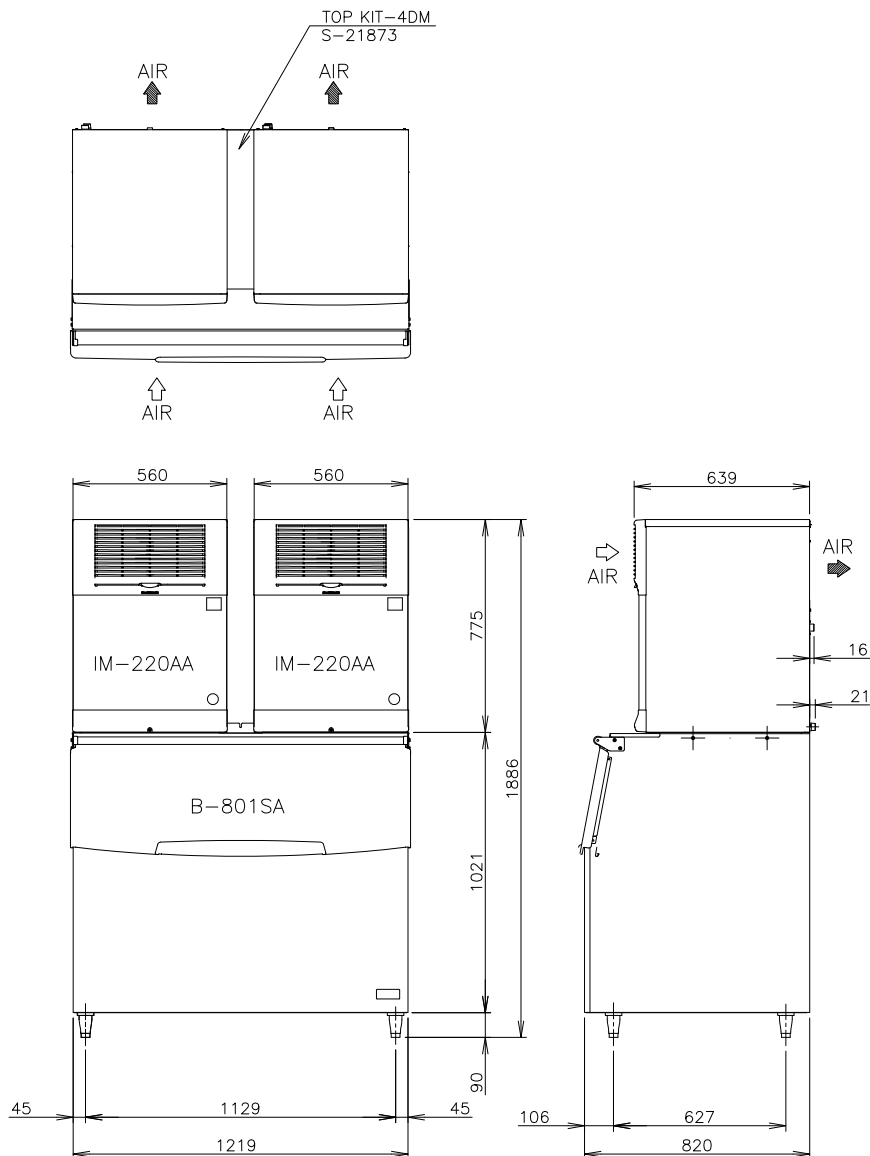

ITEM	Hoshizaki Cube Ice Maker		
MODEL	IM-440AA-B-801SA		
AC SUPPLY VOLTAGE	1 PHASE 220-240V 50Hz		
AMPERAGE	10.6A (AT.32°C, WT.21°C)		
STARTING AMPERAGE	76A		
ELECTRIC CONSUMPTION	1900W (AT.32°C, WT.21°C)		
POWER FACTOR	76%		
POWER SUPPLY CAPACITY	Min. 4.8KVA (20A)		
ICE PRODUCTION PER 24h	Approx. 380(5mm)/440(15mm)kg (AT.10°C, WT.10°C) Approx. 360(5mm)/400(15mm)kg (AT.21°C, WT.15°C) Approx. 320(5mm)/350(15mm)kg (AT.32°C, WT.21°C)		
WATER CONSUMPTION PER 24h	Approx. 1.24m³ (AT.10°C, WT.10°C) Approx. 0.62m³ (AT.21°C, WT.15°C) Approx. 0.54m³ (AT.32°C, WT.21°C)		
SHAPE OF ICE	Cube Approx. 28×28×23mm		
FREEZE CYCLE TIME	Approx. 23min (AT.21°C, WT.15°C)		
ICE PRODUCTION PER CYCLE	Approx. 6.4kg/280.pcs (AT.21°C, WT.15°C)		
MAX STORAGE CAPACITY	Approx. 286kg Maximum 348kg		
DIMENSIONS	1219mm(W)×820mm(D)×1886mm(H)		
EXTERIOR	Stainless Steel		
BIN	EXTERIOR Stainless Steel, Galvanized Steel(Rear) Plastic Door INTERIOR Polyethylene		
INSULATION FOAM BLOWING AGENT	Cyclopentane/CFC Free/ODP: 0/GWP: 3		
CONNECTIONS-ELECTRIC	X-Type Connection		
CONNECTIONS-WATER SUPPLY	Inlet G3/4 (connected at rear side)		
CONNECTIONS-DRAIN	Outlet R3/4 (connected at rear side)		
ICE MAKING SYSTEM	Cell type		
HARVESTING SYSTEM	Hot Gas Defrost		
COMPRESSOR	Hermetic		
CONDENSER	Air-cooled, Fin and Tube type		
HEAT REJECTION	4500W(3872kcal/h) (AT.32°C, WT.21°C)		
EVAPORATOR	Tin-plated Copper Tube on Sheet and Cells		
REFRIGERANT CONTROL	Thermostatic Expansion Valve		
REFRIGERANT CHARGE	R404A/500g		
ICE MAKING CONTROL SYSTEM	Thermistor, Timer		Controller Board
HARVESTING CONTROL SYSTEM	Thermistor		
BIN CONTROL SYSTEM	Microswitch with Time Delay		
ICE MAKING WATER CONTROL SYSTEM	Timer, Water Pan's movement		
ELECTRICAL PROTECTION	Class I Appliance, 5A Fuse		
COMPRESSOR PROTECTION	Auto-reset Overload Protector		
ICE MAKER PROTECTION	Interlock by Controller Board		
WEIGHT	ICE MAKER: Net weight 138kg/Gross weight 152kg BIN: Net weight 64kg/Gross weight 86kg		
ACCESSORIES	Scoop, Leg(4 pcs), Installation Kit		
OPERATING CONDITIONS	Ambient Temp.: 1 - 40°C, Water Supply Temp.: 5-35°C Water Supply Pressure: 0.7-7.8bar(0.07-0.78MPa), Voltage Range: Rated Voltage±6%		

■ We reserve the right to make changes in specifications and design without prior notice.