


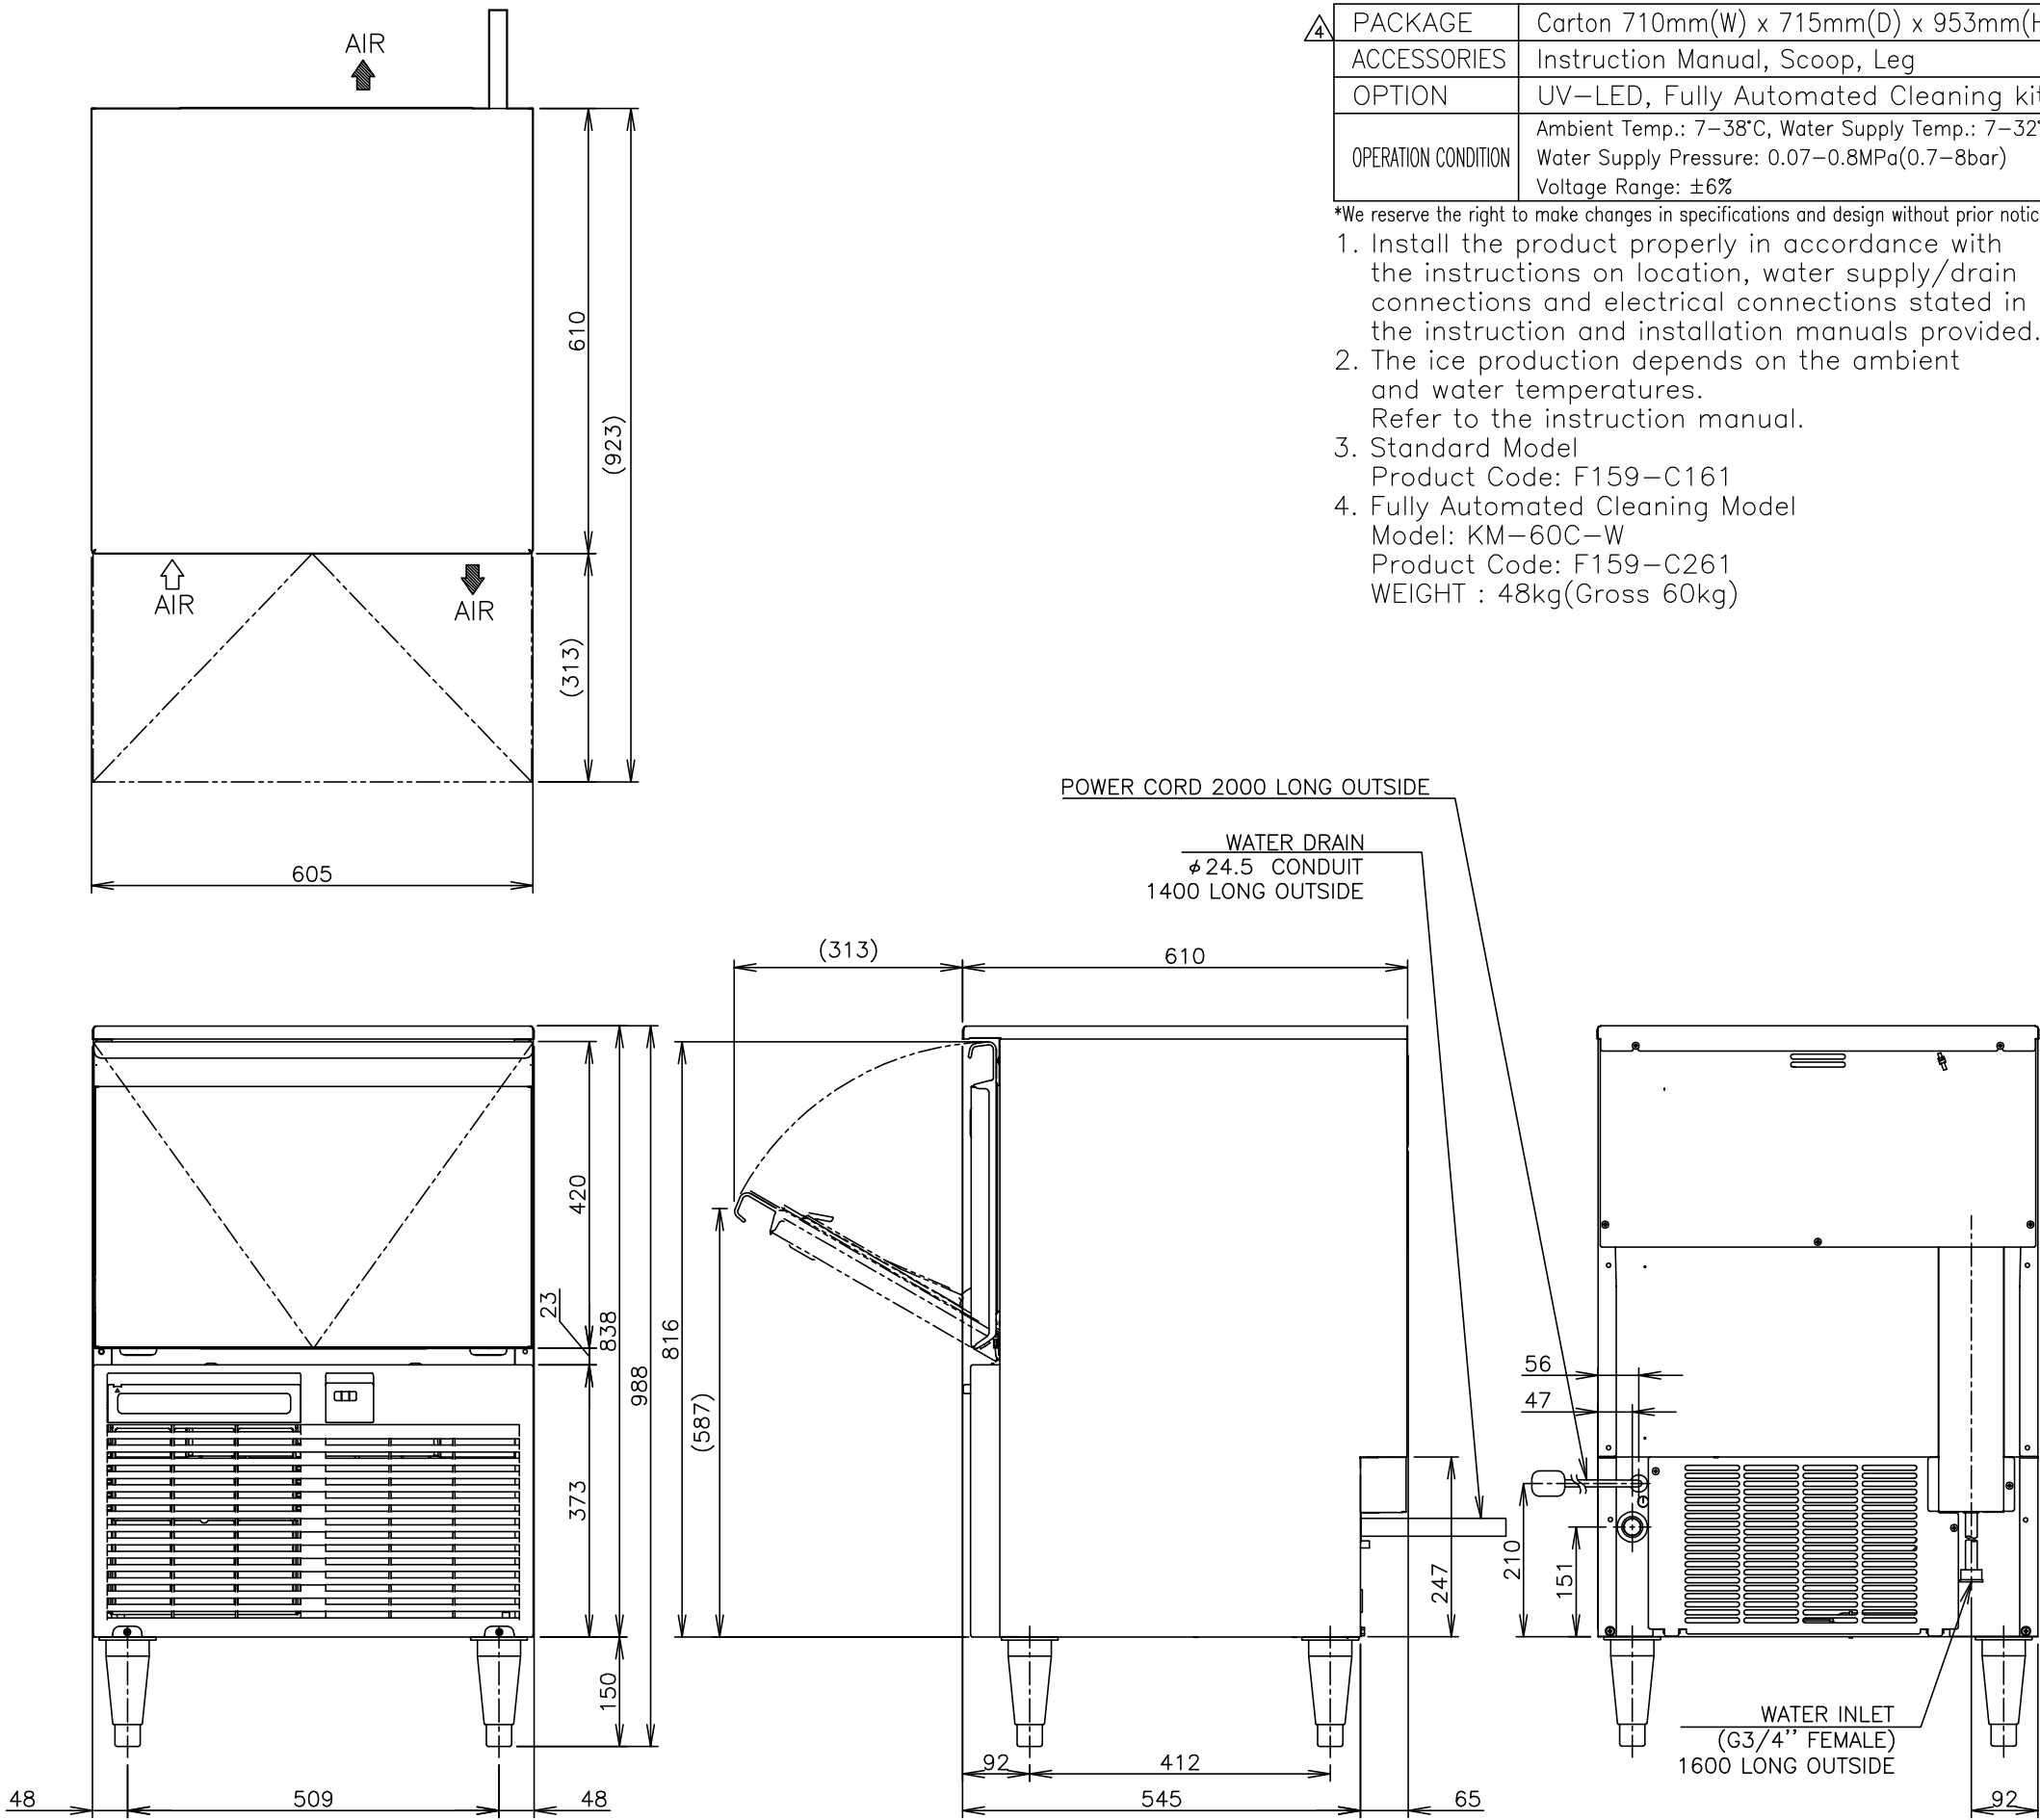

A	PACKAGE	Carton 710mm(W) x 715mm(D) x 953mm(H)	ITEM	Hoshizaki Crescent Ice Maker (Self-Contained Type)
	ACCESSORIES	Instruction Manual, Scoop, Leg	MODEL	KM-60C
	OPTION	UV-LED, Fully Automated Cleaning kit	POWER SUPPLY	1 PHASE 220-230V 60Hz Capacity: Min. 0.85kVA (3.7A)
	OPERATION CONDITION	Ambient Temp.: 7-38°C, Water Supply Temp.: 7-32°C Water Supply Pressure: 0.07-0.8MPa(0.7-8bar) Voltage Range: ±6%	AMPERAGE	2.4A(AT. 32°C, WT. 21°C) Starting: 15.5A
*We reserve the right to make changes in specifications and design without prior notice.			ELECTRIC CONSUMPTION	Rated Motor: 335W (Power factor: 67%)
1. Install the product properly in accordance with the instructions on location, water supply/drain connections and electrical connections stated in the instruction and installation manuals provided. 2. The ice production depends on the ambient and water temperatures. Refer to the instruction manual. 3. Standard Model Product Code: F159-C161 4. Fully Automated Cleaning Model Model: KM-60C-W Product Code: F159-C261 WEIGHT : 48kg(Gross 60kg)			ICE PRODUCTION PER 24h	Approx. 65kg/d(AT. 10°C, WT. 10°C) Approx. 59kg/d(AT. 21°C, WT. 15°C) Approx. 54kg/d(AT. 32°C, WT. 21°C)
			WATER CONSUMPTION PER 24h	Approx. 0.32m³/d(AT. 10°C, WT. 10°C) Approx. 0.17m³/d(AT. 21°C, WT. 15°C) Approx. 0.10m³/d(AT. 32°C, WT. 21°C)
			ELECTRIC CONSUMPTION PER 100kg ICE	15.0kWh/100kg(AT.32°C,WT.21°C)
			WATER CONSUMPTION PER 100kg ICE	0.20m³ /100kg(AT.32°C,WT.21°C)
			SHAPE OF ICE	Crescent Cube
			FREEZE CYCLE TIME	Approx. 25Min(AT. 21°C, WT. 15°C)
			ICE PRODUCTION PER CYCLE	Approx. 1.00kg / 110pcs(AT. 21°C, WT. 15°C)
			MAX STORAGE CAPACITY	Approx. 23kg(Bin Cont Setting Approx. 19kg)
			OUTSIDE DIMENSIONS	605mm(W) x 610mm(D) x 988(982-1005)mm(H)
			EXTERIOR	Stainless Steel, Galvanized Steel(Rear),Plastic(Louver)
			INSULATION	Polyurethane Foam
			INSULATION FOAM BLOWING AGENT	Cyclopentane
			CONNECTIONS-ELECTRIC	Y-type Connection(with Plug)
			CONNECTIONS-WATER SUPPLY	Inlet G3/4"(connected at rear side)
			CONNECTIONS-DRAIN	Outlet φ24.5(connected at rear side)
			ICE MAKING SYSTEM	Vertical Evaporator with water flow on both sides
			HARVESTING SYSTEM	Water Supply Harvest Cycle and Hot Gas Defrost
			COMPRESSOR	Hermetic
			CONDENSER	Air-cooled, Fin and Tube type
			HEAT REJECTION	720W(619kcal/h) (AT.32°C, WT.21°C)
EVAPORATOR	Vertical type, Stainless Steel and Copper			
REFRIGERANT CONTROL	Capillary Tube			
REFRIGERANT CHARGE	R134a/220g			
ICE MAKING CONTROL SYSTEM	Float Switch			
HARVESTING CONTROL SYSTEM	Hot Gas and Water, Thermistor and Timer			
ICE MAKING WATER CONTROL SYSTEM	Timer Controlled, Overflow Pipe			
BIN CONTROL SYSTEM	Mechanical Level Switch with Delay			
ELECTRICAL PROTECTION	Class I Appliance, 5A Fuse			
COMPRESSOR PROTECTION	Auto-reset Overload Protector(Internal)			
LOW WATER PROTECTION	Float Switch			
ICE MAKER PROTECTION	Interlock by Controller Board			
WEIGHT	46kg(Gross 58kg)			

NG OUTSIDE

DRAIN
INDUIT
UTSIDE

56

47

210

151

247

WATER INLET
(G3/4" FEMALE)
1600 LONG OUTSIDE