
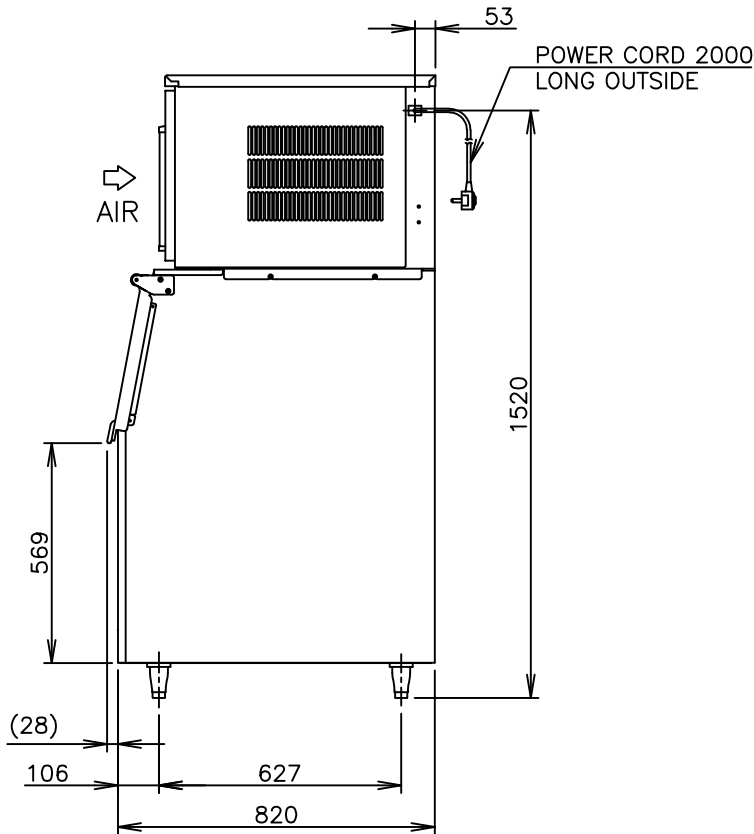
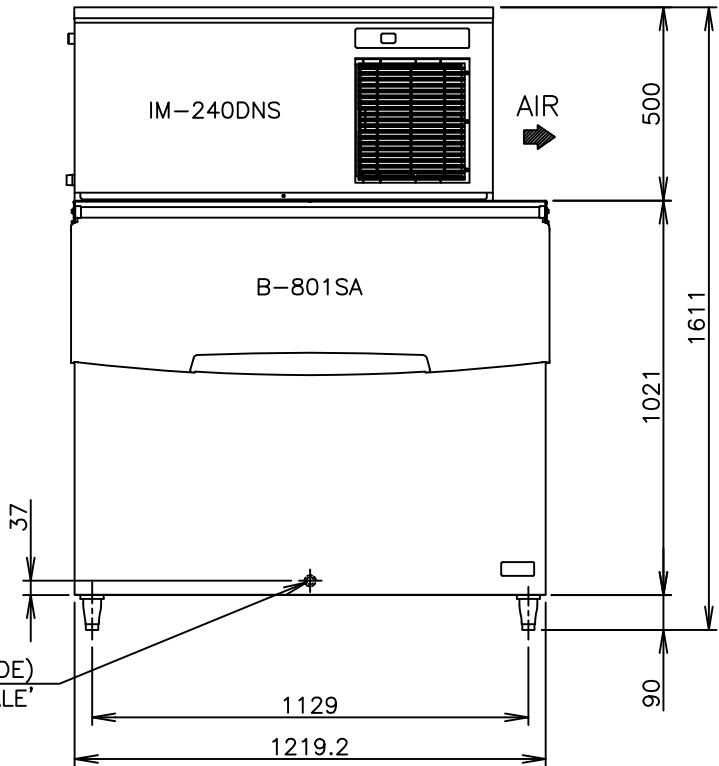
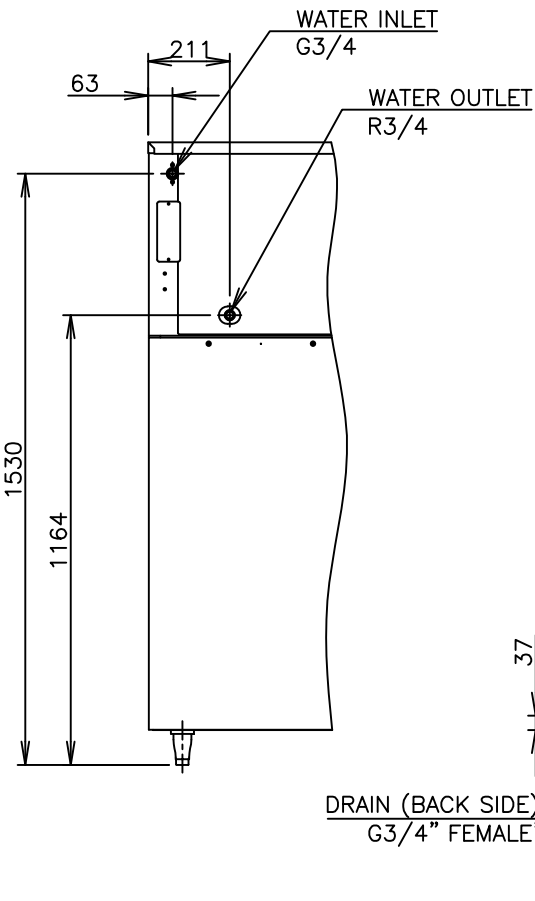


1. Install the ice maker properly in accordance with the instructions on location, water supply/drain connections and electrical connections stated in the instruction and installation manuals provided. Allow 10mm extra space at the installation site to meet any installation requirements (additional spacing is also required for proper air flow and pipe connections).
2. The ice production depends on the ambient and water temperatures. Refer to the instruction manual.
3. Product Code: M140-C162,G008,S-22986

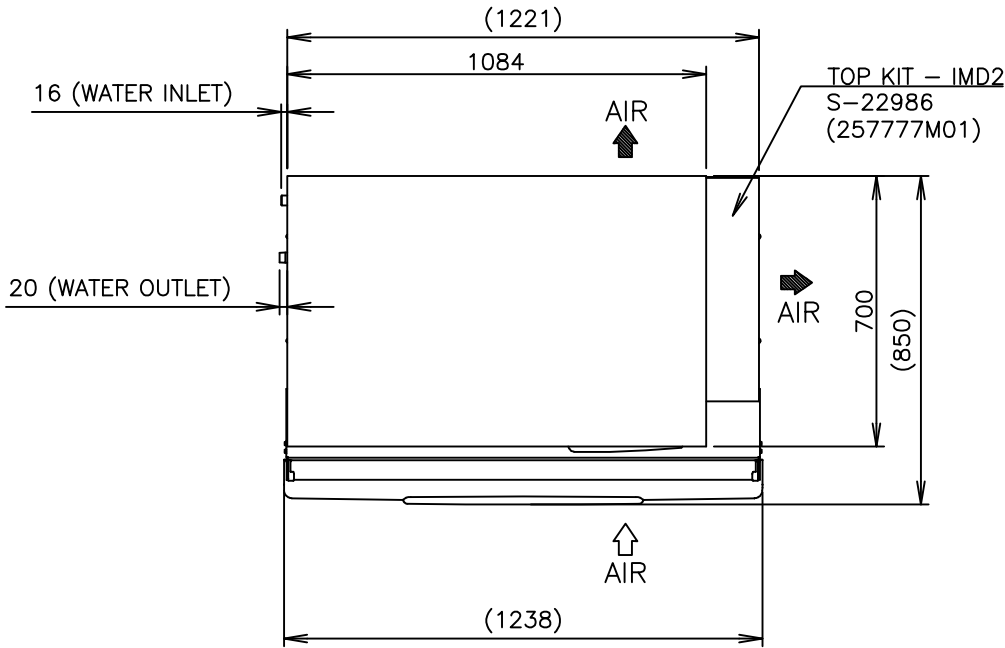

ITEM	Hoshizaki Cube Ice Maker		
MODEL	IM-240DNS-B-801SA		
AC SUPPLY VOLTAGE	1 Phase 220-240V 60Hz		
AMPERAGE	6.6A (AT.32℃, WT.21℃)		
STARTING AMPERAGE	35A		
ELECTRIC CONSUMPTION	1330W (AT.32℃, WT.21℃)		
POWER FACTOR	83%		
POWER SUPPLY CAPACITY	Min. 2.3kVA (9.6A)		
ICE PRODUCTION PER 24h	Approx. 220kg (5mm)/245kg (15mm) (AT.10℃, WT.10℃) Approx. 205kg (5mm)/220kg (15mm) (AT.21℃, WT.15℃) Approx. 180kg (5mm)/195kg (15mm) (AT.32℃, WT.21℃)		
WATER CONSUMPTION PER 24h	Approx. 0.77m ³ /d (AT.10℃, WT.10℃) Approx. 0.36m ³ /d (AT.21℃, WT.15℃) Approx. 0.35m ³ /d (AT.32℃, WT.21℃)		
STORAGE BIN	EXTERIOR Stainless Steel, Galvanized Steel (Rear) Plastic Door INTERIOR Polyethylene		
SHAPE OF ICE	Cube Approx. 28×28×32mm		
FREEZE CYCLE TIME	Approx. 20min (AT.21℃, WT.15℃)		
ICE PRODUCTION PER CYCLE	Approx. 3.2kg/140pcs (AT.21℃, WT.15℃)		
DIMENSIONS	1219.2mm(W)×820mm(D)×1611mm(H)		
STORAGE CAPACITY	Approx. 286kg (Maximum 348kg)		
EXTERIOR	Stainless Steel		
CONNECTIONS-ELECTRIC	X-Type Con. (with Plug)		
CONNECTIONS-WATER SUPPLY	Inlet G3/4 (connected at left side)		
CONNECTIONS-DRAIN	Outlet R3/4 (connected at left side)		
ICE MAKING SYSTEM	Cell type		
HARVESTING SYSTEM	Hot Gas Defrost		
COMPRESSOR	Hermetic		
CONDENSER	Air-cooled, Fin and Tube type		
HEAT REJECTION	2680W(2300kcal/h) (AT.32℃, WT.21℃)		
EVAPORATOR	Tin-plated Copper Tube on Sheet and Cells		
REFRIGERANT CONTROL	Thermostatic Expansion Valve		
REFRIGERANT CHARGE	R404A		
ICE MAKING CONTROL	Thermistor, Timer	Controller Board	
HARVESTING CONTROL	Thermistor		
BIN CONTROL	Microswitch with Time Delay		
ICE MAKING WATER CONTROL	Timer, Water Pan's movement		
ELECTRICAL PROTECTION	Class I Appliance, 5A Fuse		
COMPRESSOR PROTECTION	Auto-reset Overload Protector		
ICE MAKER PROTECTION	Interlock by Controller Board		
WEIGHT	152kg Ice Maker: Net weight 88kg/Gross weight 101kg Storage Bin: Net weight 64kg/Gross weight 86kg		
PACKAGE	Ice Maker: Carton 1196mm(W)×825mm(D)×640mm(H) Storage Bin: Carton 1239mm(W)×916mm(D)×1142mm(H)		
ACCESSORIES	Scoop, Installation Kit, Brace, Leg(4pcs)		
OPERATING CONDITIONS	Ambient Temp.: 1 - 40℃, Water Supply Temp.: 5-35℃ Water Supply Pressure: 0.07-0.78MPa(0.7-8bar),Voltage Range: Rated Voltage±6%		

*We reserve the right to make changes in specifications and design without prior notice.