



4. The ice maker drain outlet will not be used and must be closed.
5. Product Code: IM-240DNS: M140-C162
IM-240XNS: M140-C163
N-200A: 30FK
P-200CR4: 30JG
ST-200A: 30EH
2. The ice production depends on the ambient and water temperatures. Refer to the instruction manual.
3. Allow at least 30cm clearance at rear and 50cm at right side. The unit can be installed with no clearance at rear. But this will result in about 10% reduction in ice production capacity.

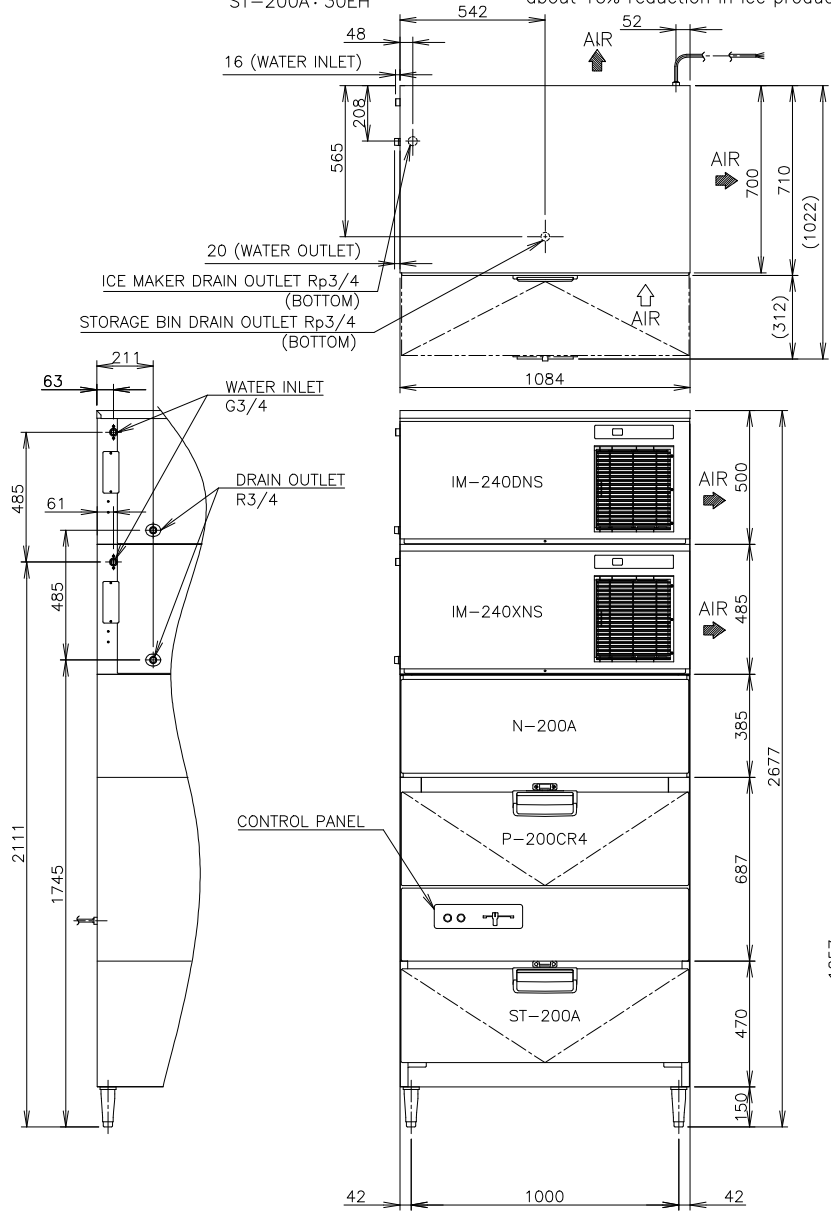

LEG	Plastic, Adjustable from 150 to 180mm	ITEM	Hoshizaki Cube Ice Maker with Crusher
WEIGHT	294kg IM-240DNS Net 88kg/Gross 101kg IM-240XNS Net 84kg/Gross 98kg N-200A Net 24kg/Gross 30kg P-200CR4 Net 65kg/Gross 77kg ST-200A Net 33kg/Gross 41kg	MODEL	IM-480DNS-STCRN
		POWER SUPPLY (THREE REQUIRED)	IM-240DNS,XNS 1 Phase 220-230V 60Hz Capacity: Min. 2.9kVA (12.7A) x 2 P-200CR4 3 Phase 200V 50/60Hz Capacity: Min. 1kVA (2.9A)
		AMPERAGE	IM-240DNS,XNS Running: 6.0A x 2 Rated Motor: 6.0A x 2 Starting: 46A x 2 P-200CR4 Running: 1.1/1.0A Rated Motor: 1.1/1.0A
PACKAGE	IM-240DNS,XNS Carton 1196mm(W)×825mm(D)×640mm(H) N-200A Carton 1160mm(W) x 750mm(D) x 410mm(H) P-200CR4 Carton 1185mm(W)×870mm(D)×874mm(H) ST-200A Carton 1176mm(W)×786mm(D)×504mm(H)	ELECTRIC CONSUMPTION	IM-240DNS,XNS Rated Motor: 1250W (Power factor: 90%) x 2 P-200CR4 Rated Motor: 258/253W
		ICE PRODUCTION PER 24h	Approx. 455 (5mm) /490 (15mm) kg (Ambient Temp.10°C, Water Temp.10°C) Approx. 415 (5mm) /440 (15mm) kg (Ambient Temp.21°C, Water Temp.15°C) Approx. 380 (5mm) /405 (15mm) kg (Ambient Temp.32°C, Water Temp.21°C)
ACCESSORIES	Scoop, Installation Kit, Brace		
OPTIONAL PARTS	Ice Guide(for Crusher)	SHAPE OF ICE	Cube Approx 28 x 28 x 32mm, crushed
OPERATING CONDITIONS	IM-240DNS,XNS Ambient Temp.: 1 - 40°C, Water Supply Temp.: 5-35°C Water Supply Pressure: 0.07-0.8MPa (0.7-8bar) Voltage Range: Rated Voltage±6% P-200CR4 Voltage Range: Rated Voltage±10%	FREEZE CYCLE TIME	Approx. 20min (Ambient Temp.21°C, Water Temp.15°C)
		ICE PRODUCTION PER CYCLE	Approx. 3.2kg/140pcs (Ambient Temp.21°C, Water Temp.15°C) x 2
		CRUSHING ADJUSTMENT	Lever (Large, Medium, Small)

*We reserve the right to make changes in specifications and design without prior notice.

1. Install the ice maker properly in accordance with the instructions on location, water supply/drain connections and electrical connections stated in the instruction and installation manuals provided.Allow 10mm extra space at the installation site to meet any installation requirements (additional spacing is also required for proper air flow and pipe connections).

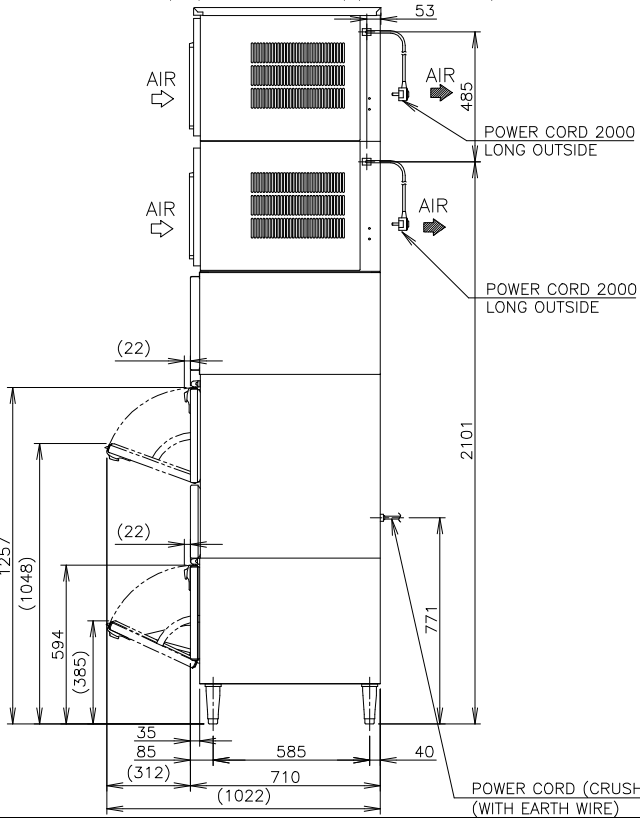

POWER CORD 2000 LONG OUTSIDE	
POWER CORD 2000 LONG OUTSIDE	
POWER CORD (CRUSHER) 2000 LONG OUTSIDE (WITH EARTH WIRE)	

HOSHIZAKI CUBE ICE MAKER WITH CRUSHER IM-480DNS-STCRN

APPROVED	CHECKED	DESIGNED	DRAWN	SCALE	1/20	TRIGONOMETRY
TORIHATA	TORIHATA	LXF	LXF			
*	*	****	DATE	2025.02.25	DRAWING NO.	D41585
APPROVED	DESIGNED	SYMBOL	DATE			