
参え。 ホシザキ 2024. 05. 21

HOSHIZAKI





2. The heat rejection is based on the reached pulldown temperature at ambient temperature of 38°C and power supply of 230V 50Hz.


The amperage and electric consumption are based on measurements at ambient temperature of 38°C and power supply of 230V 50Hz.


3. The cabinet temperature range of −6 to 12℃ guaranteed at ambient temperature of 35℃

4. Product code: T269-D111

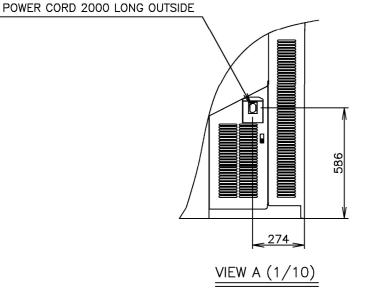




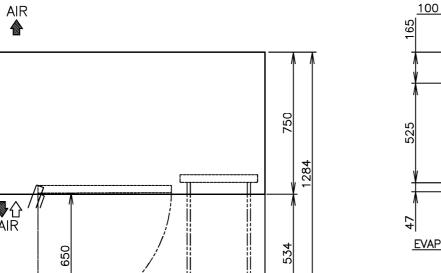

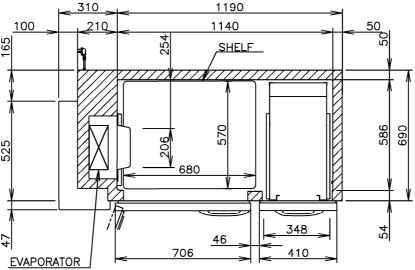


ITEM Hoshizaki Undercounter Refrigerator RT-158MA-S-3D MODEL POWER SUPPLY 1 Phase 230V 50Hz Capacity: 0.5kVA (2.5A) **AMPERAGE** Rated 2.0A Motor 260W Heater 189W ELECTRIC CONSUMPTION Refrigeration 245W Defrost 165W HEAT REJECTION POWER CORD 2.0m (UK Plug with Earth Wire) EFFECTIVE CAPACITY 420L OUTSIDE DIMENSIONS 1500mm (W) x 750mm (D) x 850(-880) mm (H) 1140mm (W) x586mm (D) x 599mm (H) INSIDE DIMENSIONS Stainless Steel **EXTERIOR** Galvanized Steel (Rear/Bottom) INTERIOR Stainless Steel, Stainless Pack (Door) INSULATION Polyurethane Foam INSULATION FOAM Cyclopentane **BLOWING AGENT** REFRIGERATION SYSTEM Forced Air Circulation DEFROST SYSTEM Glass Tube Heater COMPRESSOR Hermetic CONDENSER Wire and Tube type, Air—cooled **EVAPORATOR** Fin and Tube Type REFRIGERANT R134a TEMPERATURE CONTROL Microprocessor (Digital Temp Indication) Adjustable from −6 to 12℃ Microprocessor controlled DEFROST CONTROL Fuse, Earth Wire ELECTRIC CIRCUIT PROTECTION COMPRESSOR PROTECTION Motor Protector LEG Plastic Adjustable 150 to 180mm SHELF 2pcs. Net: 87kg (Gross: Approx. 92kg) WEIGHT **PACKAGE** Carton 1565mm (W) x 830mm (D) x 790mm (H) ACCESSORIES Ambient Temperature: 5-38°C OPERATING CONDITIONS Voltage Range: Rated Voltage±6%


*We reserve the right to make changes in specifications and design without prior notice.

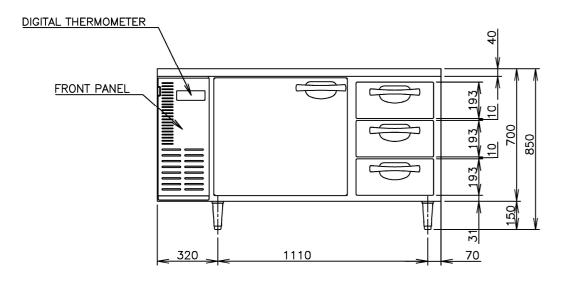

1500

¥ ₩



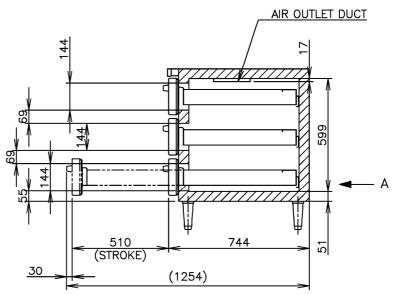

APPROV TORIHA		CHECKED ZHOU	DESIGNED ZHOU	DRAWN ZHOU		SCALE 1	/20	TRIGONOMETRY	
*	*		****		DATE		DRAWING NO.		SYMBOL
APPROVED	APPROVED DESIGNED		DATF		2023.9.22		 		I /─\