


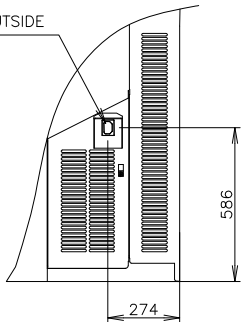


POWER CORD 2000 LONG OUTSIDE

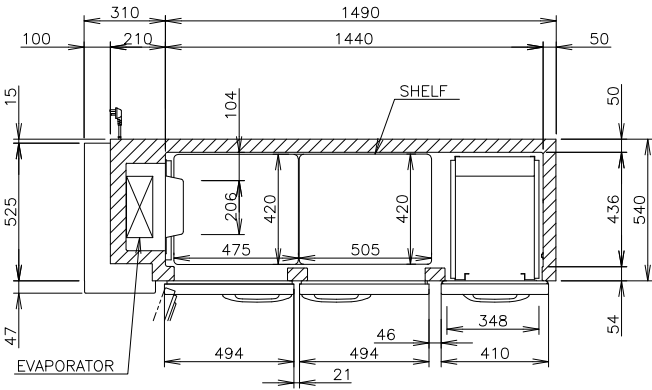

UK PLUG

VIEW A (1/10)

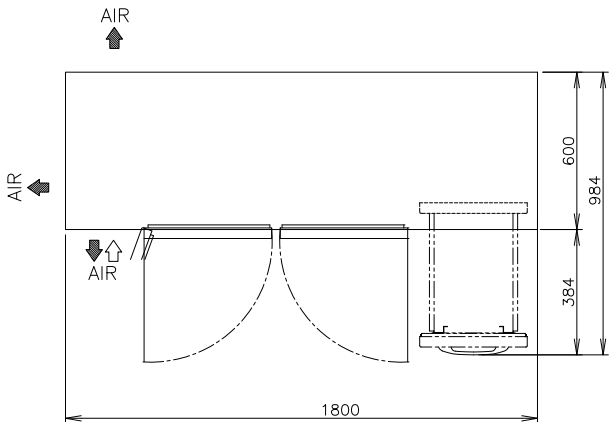

|                               |                                                                    |
|-------------------------------|--------------------------------------------------------------------|
| ITEM                          | Hoshizaki Undercounter Refrigerator                                |
| MODEL                         | RT-186MA-S-3D                                                      |
| POWER SUPPLY                  | 1 Phase 230V 50Hz Capacity: 0.67kVA (3.05A)                        |
| AMPERAGE                      | Rated 2.1A                                                         |
| ELECTRIC CONSUMPTION          | Motor 270W Heater 201W Refrigeration 280W Defrost 165W             |
| HEAT REJECTION                | *W                                                                 |
| POWER CORD                    | 2.0m (UK Plug with Earth Wire)                                     |
| EFFECTIVE CAPACITY            | 401L                                                               |
| OUTSIDE DIMENSIONS            | 1800mm (W) x 600mm (D) x 850(-880) mm (H)                          |
| INSIDE DIMENSIONS             | 1440mm (W) x 436mm (D) x 599mm (H)                                 |
| EXTERIOR                      | Stainless Steel<br>Galvanized Steel (Rear/Bottom)                  |
| INTERIOR                      | Stainless Steel, Stainless Pack (Door)                             |
| INSULATION                    | Polyurethane Foam                                                  |
| INSULATION FOAM BLOWING AGENT | Cyclopentane                                                       |
| REFRIGERATION SYSTEM          | Forced Air Circulation                                             |
| DEFROST SYSTEM                | Glass Tube Heater                                                  |
| COMPRESSOR                    | Hermetic                                                           |
| CONDENSER                     | Wire and Tube type, Air-cooled                                     |
| EVAPORATOR                    | Fin and Tube Type                                                  |
| REFRIGERANT                   | R134a                                                              |
| TEMPERATURE CONTROL           | Microprocessor (Digital Temp Indication) Adjustable from -6 to 12℃ |
| DEFROST CONTROL               | Microprocessor controlled                                          |
| ELECTRIC CIRCUIT PROTECTION   | Fuse, Earth Wire                                                   |
| COMPRESSOR PROTECTION         | Motor Protector                                                    |
| LEG                           | Plastic Adjustable 150 to 180mm                                    |
| SHELF                         | 4pcs.                                                              |
| WEIGHT                        | Net: 93kg (Gross: Approx. 98kg)                                    |
| PACKAGE                       | Carton 1865mm (W) x 680mm (D) x 790mm (H)                          |
| ACCESSORIES                   | -                                                                  |
| OPERATING CONDITIONS          | Ambient Temperature: 5-38℃<br>Voltage Range: Rated Voltage±6%      |

\*We reserve the right to make changes in specifications and design without prior notice.

DIGITAL THERMOMETER

FRONT PANEL

