
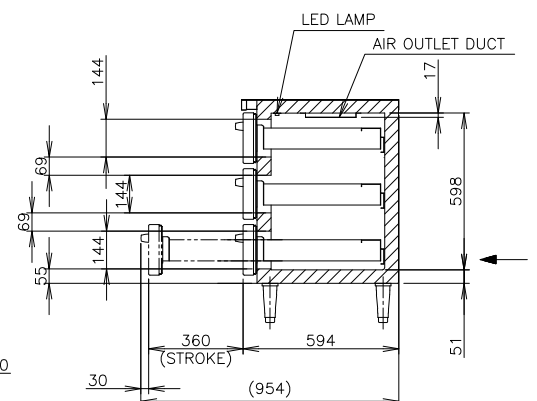

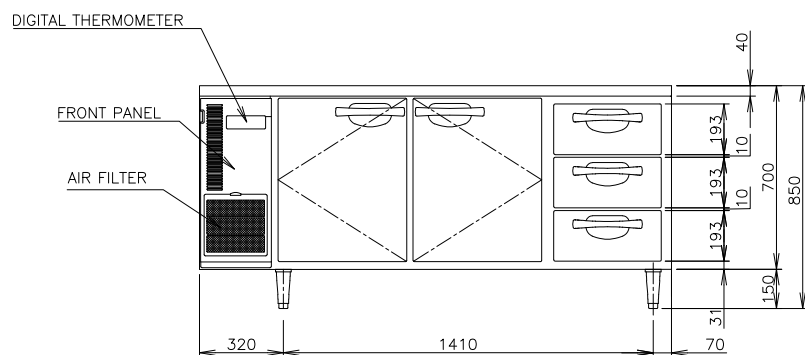



ITEM	Hoshizaki Undercounter Refrigerator
MODEL	FT-186MA-P-3D
POWER SUPPLY	1 Phase 230V 60Hz Capacity: 0.65kVA (2.98A)
AMPERAGE	Rated 2.7A
ELECTRIC CONSUMPTION	Motor 400W Heater 397W Refrigeration 357W Defrost 397W
HEAT REJECTION	*W
POWER CORD	2.0m ( Plug with Earth Wire)
EFFECTIVE CAPACITY	401L
OUTSIDE DIMENSIONS	1800mm (W) x 600mm (D) x 850(-880) mm (H)
INSIDE DIMENSIONS	1440mm (W) x 436mm (D) x 599mm (H)
EXTERIOR	Stainless Steel Galvanized Steel (Rear/Bottom)
INTERIOR	Stainless Steel, Stainless Pack (Door)
INSULATION	Polyurethane Foam
INSULATION FOAM BLOWING AGENT	Cyclopentane
REFRIGERATION SYSTEM	Forced Air Circulation
DEFROST SYSTEM	Glass Tube Heater
COMPRESSOR	Hermetic
CONDENSER	Fin and Tube type, Air-cooled
EVAPORATOR	Fin and Tube Type
REFRIGERANT	R404A
TEMPERATURE CONTROL	Microprocessor (Digital Temp Indication) Adjustable from -23 to -7
DEFROST CONTROL	Microprocessor controlled
ELECTRIC CIRCUIT PROTECTION	Fuse, Earth Wire
COMPRESSOR PROTECTION	Motor Protector
LEG	Plastic Adjustable 150 to 180mm
SHELF	4pcs.
WEIGHT	Net: 93kg (Gross: Approx. 98kg)
PACKAGE	Carton1865mm (W) x 680mm (D) x 790mm (H)
ACCESSORIES	-
OPERATING CONDITIONS	Ambient Temperature: 5-38°C Voltage Range: Rated Voltage±6%

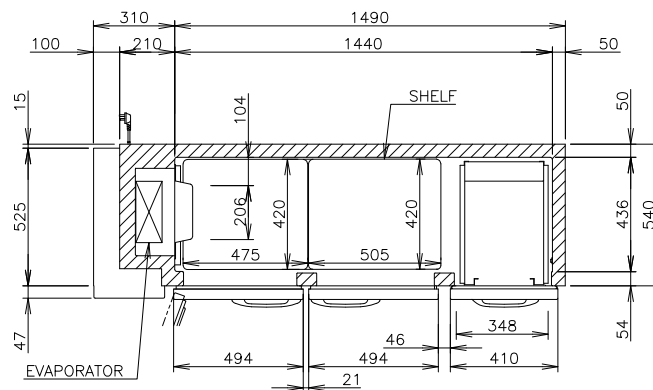

APPROVED TORIHATA	CHECKED ZHOU	DESIGNED ZHOU	DRAWN ZHOU	SCALE 1/20	TRIGONOMETRY		
*	*	*****		DATE 2023.10.20	DRAWING NO. D38479		SYMBOL 
APPROVED	DESIGNED	SYMBOL	DATE				