
₩ 🖚

## **HOSHIZAKI**




- 1. Install the product properly in accordance with the instructions on location, electrical connections stated in the instruction manual provided. Allow 10mm extra space at the installation site to meet any installation requirements (additional spacing is also required for proper air flow and
- spacing is also required for proper air flow and pipe connections).

  2. The heat rejection is based on the reached pulldown temperature at ambient temperature of 38°C and power supply of 23°OV 50°Hz.


  The amperage and electric consumption are based on measurements at ambient temperature of 38°C and power supply of 23°OV 50°Hz.


  3. The cabinet temperature range of -23 to -7°C appreciated at ambient temperature of 35°C and 25°C are considered to the considered temperature of 35°C and 25°C are considered to the considered temperature of 35°C and 25°C are considered to the considered temperature of 35°C and 25°C are considered to the considered temperature of 35°C and 25°C are considered to the considered temperature of 35°C and 25°C are considered to the considered temperature of 35°C and 25°C are considered to the considered temperature of 35°C and 25°C are considered to the considered temperature of 35°C and 25°C are considered to the considered temperature of 35°C and 25°C are considered to the considered temperature of 35°C and 25°C are considered to the considered temperature of 35°C and 25°C are considered to the considered temperature of 35°C and 25°C are considered to the considered temperature of 35°C and 25°C are considered to the considered temperature of 35°C and 25°C are considered to the considered temperature of 35°C and 25°C are considered to the considered temperature of 35°C and 25°C are considered to the considered temperature of 35°C and 25°C are considered to the considered temperature of 35°C and 25°C are considered to the considered temperature of 35°C and 25°C are considered to the considered temperature of 35°C and 25°C are considered to the considered temperature of 35°C and 25°C are considered to the considered temperature of 35°C and 25°C are considered to the considered temperature of 35°C and 25°C are considered to the considered temperature of 35°C and 25°C are considered to the considered temperature of 35°C and 25°C are considered to the considered temperature of 35°C and 25°C are
- guaranteed at ambient temperature of 35°C
- 4. Product code: T274-D111

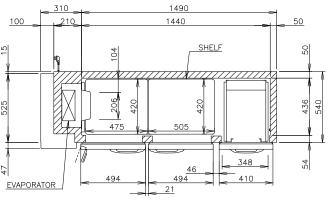

| Hoshizaki Undercounter Refrigerator                                                                                           |
|-------------------------------------------------------------------------------------------------------------------------------|
| FT-186MA-S-3D                                                                                                                 |
| 1 Phase 230V 50Hz Capacity: 0.65kVA (2.98A)                                                                                   |
| Rated 2.7A                                                                                                                    |
| Motor 400W Heater 397W<br>Refrigeration 357W Defrost 330W                                                                     |
| *W                                                                                                                            |
| 2.0m (UK Plug with Earth Wire)                                                                                                |
| 401L                                                                                                                          |
| 1800mm (W) x 600mm (D) x 850(-880) mm (H)                                                                                     |
| 1440mm (W) x 436mm (D) x 599mm (H)                                                                                            |
| Stainless Steel<br>Galvanized Steel (Rear/Bottom)                                                                             |
| Stainless Steel, Stainless Pack (Door)                                                                                        |
| Polyurethane Foam                                                                                                             |
| Cyclopentane                                                                                                                  |
| Forced Air Circulation                                                                                                        |
| Glass Tube Heater                                                                                                             |
| Hermetic                                                                                                                      |
| Fin and Tube type, Air—cooled                                                                                                 |
| Fin and Tube Type                                                                                                             |
| R404A                                                                                                                         |
| Microprocessor (Digital Temp Indication) Adjustable from −23 to −7c                                                           |
| Microprocessor controlled                                                                                                     |
| Fuse, Earth Wire                                                                                                              |
| Motor Protector                                                                                                               |
| Plastic Adjustable 150 to 180mm                                                                                               |
| 4pcs.                                                                                                                         |
| Net: 93kg (Gross: Approx. 98kg)                                                                                               |
| Carton1865mm (W) x 680mm (D) x 790mm (H)                                                                                      |
| _                                                                                                                             |
| Ambient Temperature: 5-38°  Voltage Range: Rated Voltage±6%  o make changes in specifications and design without prior notice |
|                                                                                                                               |

\*We reserve the right to make changes in specifications and design without prior notice.

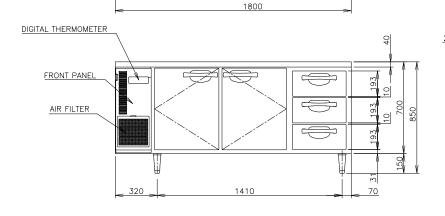

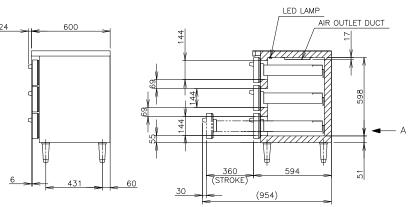

909