
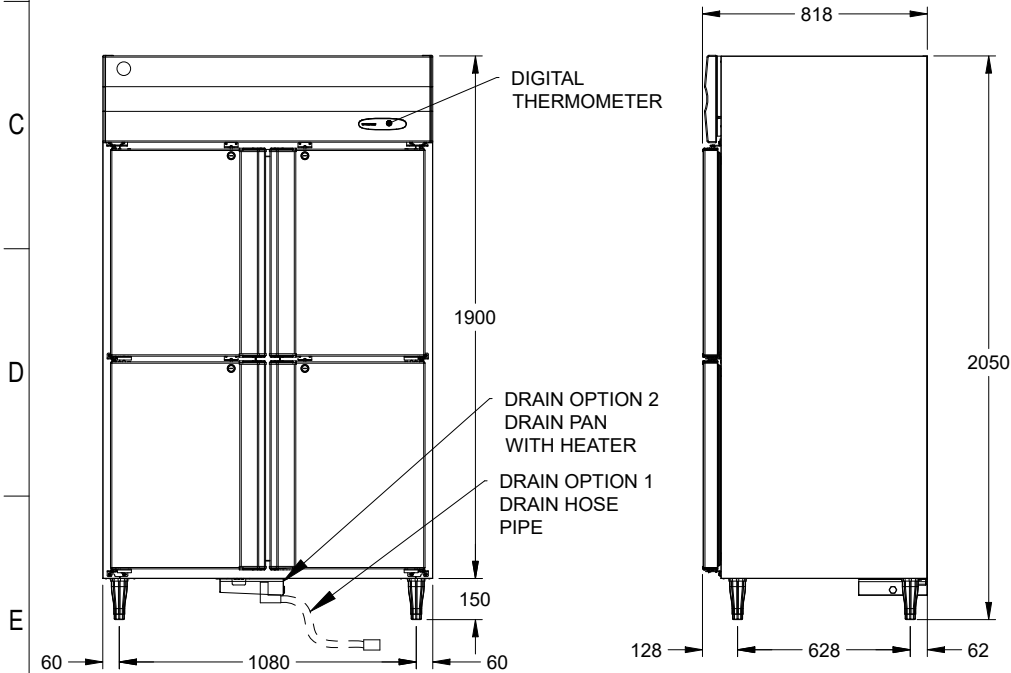


THIS DRAWING AND THE INFORMATION CONTAINED HEREIN IS PROPRIETARY TO M/S WESTERN REFRIGERATION PVT. LTD. IT SHALL NOT BE REPRODUCED, COPIED OR DISCLOSED, IN WHOLE OR IN PART OR USED FOR MANUFACTURE OR FOR OTHER PURPOSE WITHOUT THE WRITTEN PERMISSION OF M/S WESTERN REFRIGERATION PVT. LTD.

WRF/PDC/15,
REV/A
DATE 01.03.2022



NOTE: COMPONENT AND ASSEMBLY MUST BE COMPLIANT TO APPLICABLE RECENT ROHS DIRECTIVES.

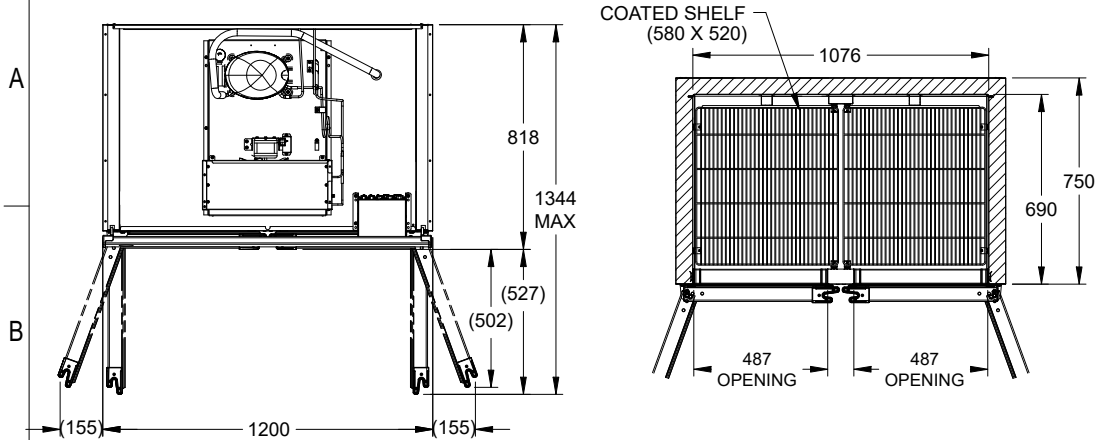



*WE RESERVE THE RIGHT TO MAKE CHANGES IN SPECIFICATIONS AND DESIGN WITHOUT PRIOR NOTICE

- INSTALL THE PRODUCT PROPERLY IN ACCORDANCE WITH THE INSTRUCTIONS ON LOCATION, ELECTRICAL CONNECTIONS STATED IN THE INSTRUCTION MANUAL PROVIDED.
ALLOW 10MM EXTRA SPACE AT THE INSTALLATION SITE TO MEET ANY INSTALLATION REQUIREMENTS (ADDITIONAL SPACING IS ALSO REQUIRED FOR PROPER AIR FLOW AND PIPE CONNECTIONS).
- THE HEAT REJECTION IS BASED ON THE REACHED PULL DOWN TEMPERATURE AT AMBIENT TEMPERATURE OF 43°C AND POWER SUPPLY OF 230VAC 50HZ.
THE AMPERAGE AND ELECTRIC CONSUMPTION ARE BASED ON MEASUREMENT AT AMBIENT TEMPERATURE OF 43°C AND POWER SUPPLY OF 230VAC 50HZ.

THIS ASSEMBLY DRAWING IS FOR ILLUSTRATION PURPOSE.
COMPONENTS, ASSEMBLY SEQUENCE MAY VARY DEPENDING UPON MANUFACTURING PRACTICES SPECIFIC TO MANUFACTURING LOCATIONS.
REFER PROCESS WORK INSTRUCTIONS FOR MORE DETAILS ON ASSEMBLY.
REFER SAP BOM FOR EXACT MATERIAL CONSUMPTION.

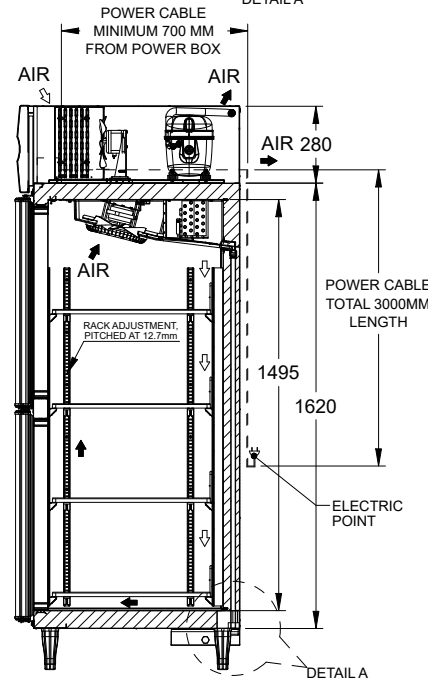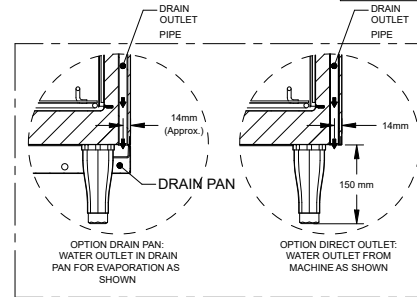

OPTIONS	SUS 430
STANDARD	HFWH127MS4
LED VERSION	HFWH127LS4

UNSPECIFIED TOLERANCES							<div>SCALE: NTS</div> <div></div> <div>ALL DIMENSIONS ARE IN MM</div>	TITLE		DWG. NO.		REVISION
DIM	<6	6-30	30-120	120-400	400-1000	>1000				0711579		
TOL	N/A	±1.0	±1.5	±2.0	±2.5	±3.0		SAP CODE		-		
UNSPECIFIED TOL. ON ANGLE ±0.5								DRAWN BY	MODEL		<div></div>	
							ROSHAN	HFWH127MS4 /HFWH127LS4				
1 * " " DIMENSIONS ARE IMPORTANT. 2 REFERENCE DIMENSIONS ARE MARKED WITH " () " 3 PART SHOULD BE FREE FROM SHARP EDGES & BURRS							CHECKED BY	RELEASE DATE	SHEET			
							ANAND	27.10.2023	1 OF 2			
REFERENCE STANDARD							APPROVED BY	RELEASE STAGE:				
-							PRATAP	RELEASED				

CHANGE NOTE						
REVISION	SHEET NO	ZONE	DETAILS	ECN	DATE	DRAWN





- OPTIONS:
- PLASTIC 90MM HEIGHT LEG ARE AVAILABLE AS OPTION.
(MACHINE OVERALL HEIGHT WILL DECREASE BY 60MM)
 - CASTOR 124MM HEIGHT ARE AVAILABLE AS OPTION (REFER SHEET 2)
 - BOTTOM & REAR PANEL CAN BE AVAILABLE IN SUS 430/ SUS304
 - TOP COVER PANEL IS AVAILABLE AS OPTION, MACHINE OVERALL HEIGHT WILL INCREASE BY 31 MM.

ITEM	HOSHIZAKI FREEZER
MODEL	HFWH127MS4/ HFWH127LS4
POWER SUPPLY	SINGLE PHASE, 230V AC, 50HZ
RATED CURRENT	5.5 AMPS
RATED POWER	1100W
HEAT REJECTION	1.858 KW
POWER CORD	16 AMPS / 3 METER
EFFECTIVE CAPACITY	1020L
OUTSIDE DIMENSIONS	1200 (W) X 818 (D) X 2050 (H - WITH 150MM LEG)
INSIDE DIMENSIONS	1076 (W) X 690 (D) X 1495 (H)
EXTERIOR	SS 430 HAIRLINE NO 4 FINISH, GALVANIZED STEEL POWDER COATED (BOTTOM)
INTERIOR	SS 430 HAIRLINE NO 4 FINISH
INSULATION	POLYURETHANE FOAM (CFC FREE)
INSULATION FOAM BLOWING AGENT	CYCLOPENTANE
REFRIGERATION SYSTEM	FORCED AIR CIRCULATION
DEFROST STSTEM	HEATER DEFROST (1265W X 1NOS)
COMPRESSOR	HERMETIC 1100 W
CONDENSER	FORCED (WIRE ON TUBE)
EVAPORATOR	FORCED (FIN & TUBE)
REFRIGERANT/ CHARGE	R-290 / 118 GRAM
TEMP. CONTROL	ELECTRONIC ADJUSTABLE FROM -7°C TO -25°C
DEFROST CONTROL	BY TEMPERATURE CONTROLLER
ELECTRIC CIRCUIT PROTECTION	NON RESETTABLE FUSE (GLASS FUSE) 10 AMP
COMPRESSOR PROTECTION	MOTOR PROTECTOR
LEG	PLASTIC ADJUSTABLE 150 TO 170MM
SHELF	8 PCS
WEIGHT	NET: 170KG (GROSS: APPROX 203 KG)
PACKAGE	CARTON (WOODEN PALLET) 1285MM (W) X 895MM (D) X 2045MM(H)
ASSESSORIES	DRAIN ACCESSORIES AND SHELF CLIPS
OPERATING CONDITIONS	AMBIENT TEMPERATURE : 5 - 43°C VOLTAGE RANGE RATED VOLTAGE ±6%
CABINET LAMP (FOR LS4 VERSION)	LED STRIP TYPE 1000MM, 7.5W, DC24V : 1 NOS.
LAMP DRIVER (FOR LS4 VERSION)	ELECTRONIC DRIVER 12W OR 8.5W

THIS DRAWING AND THE INFORMATION CONTAINED HEREIN IS PROPRIETARY TO M/S WESTERN REFRIGERATION PVT. LTD. IT SHALL NOT BE REPRODUCED, COPIED OR DISCLOSED, IN WHOLE OR IN PART OR USED FOR MANUFACTURE OR FOR OTHER PURPOSE WITHOUT THE WRITTEN PERMISSION OF M/S WESTERN REFRIGERATION PVT. LTD.

WRF/PDC/15,
REV/A
DATE 01.03.2022

NOTE: COMPONENT AND ASSEMBLY MUST BE COMPLIANT TO APPLICABLE RECENT ROHS DIRECTIVES.

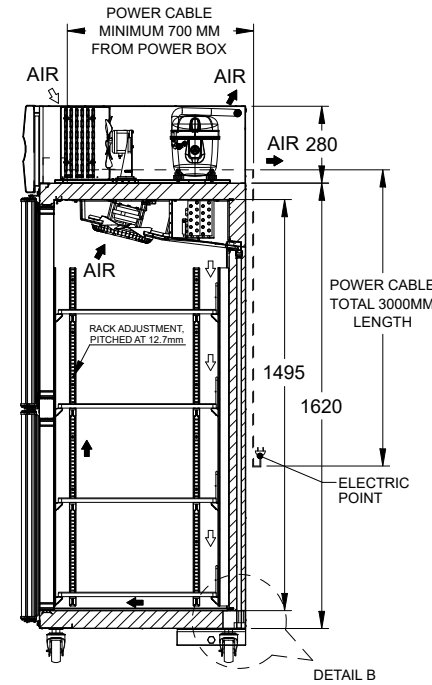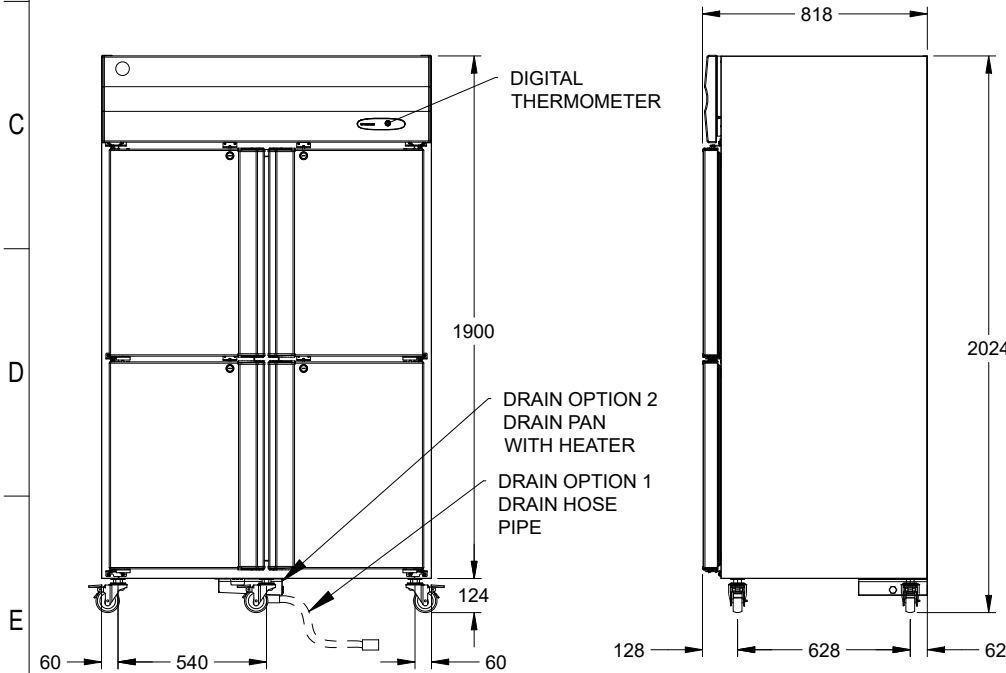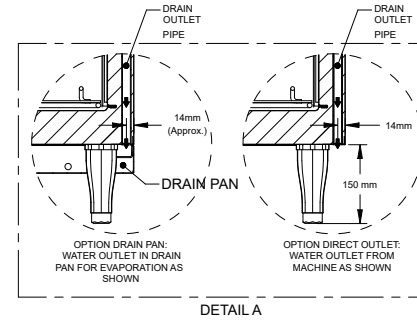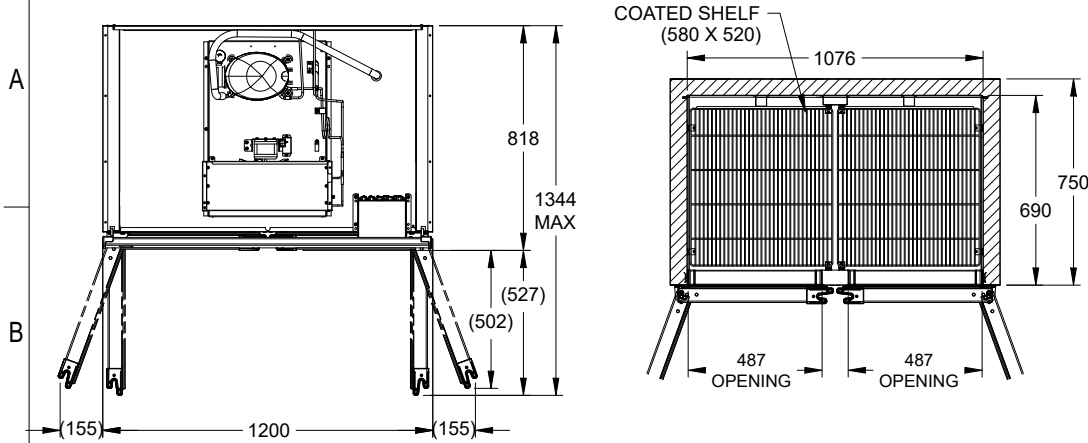

- OPTIONS:
3. BOTTOM & REAR PANEL CAN BE AVAILABLE IN SUS 430/ SUS304
4. TOP COVER PANEL IS AVAILABLE AS OPTION, MACHINE OVERALL HEIGHT WILL INCREASE BY 31 MM.

ITEM	HOSHIZAKI FREEZER
MODEL	HFWH127MS4/ HFWH127LS4
POWER SUPPLY	SINGLE PHASE, 230V AC, 50HZ
RATED CURRENT	5.5 AMPS
RATED POWER	1100W
HEAT REJECTION	1.858 KW
POWER CORD	16 AMPS / 3 METER
EFFECTIVE CAPACITY	1020L
OUTSIDE DIMENSIONS	1200 (W) X 818 (D) X 2024 (H - WITH CASTOR)
INSIDE DIMENSIONS	1076 (W) X 690 (D) X 1495 (H)
EXTERIOR	SS 430 HAIRLINE NO 4 FINISH, GALVANIZED STEEL POWDER COATED (BOTTOM)
INTERIOR	SS 430 HAIRLINE NO 4 FINISH
INSULATION	POLYURETHANE FOAM (CFC FREE)
INSULATION FOAM BLOWING AGENT	CYCLOPENTANE
REFRIGERATION SYSTEM	FORCED AIR CIRCULATION
DEFROST STSTEM	HEATER DEFROST (1265W X 1NOS)
COMPRESSOR	HERMETIC 1100 W
CONDENSER	FORCED (WIRE ON TUBE)
EVAPORATOR	FORCED (FIN & TUBE)
REFRIGERANT/ CHARGE	R-290 / 118 GRAM
TEMP. CONTROL	ELECTRONIC ADJUSTABLE FROM -7°C TO -25°C
DEFROST CONTROL	BY TEMPERATURE CONTROLLER
ELECTRIC CIRCUIT PROTECTION	NON RESETTABLE FUSE (GLASS FUSE) 10 AMP
COMPRESSOR PROTECTION	MOTOR PROTECTOR
CASTOR	NON ADJUSTABLE 5 NOS
SHELF	8 PCS
WEIGHT	NET: 172KG (GROSS: APPROX 205 KG)
PACKAGE	CARTON (WOODEN PALLET) 1285MM (W) X 895MM (D) X 2045MM(H)
ASSESSORIES	DRAIN ACCESSORIES AND SHELF CLIPS
OPERATING CONDITIONS	AMBIENT TEMPERATURE : 5 - 43°C VOLTAGE RANGE RATED VOLTAGE ±6%
CABINET LAMP (FOR LS4 VERSION)	LED STRIP TYPE 1000MM, 7.5W, DC24V : 1 NOS.
LAMP DRIVER (FOR LS4 VERSION)	ELECTRONIC DRIVER 12W OR 8.5W

*WE RESERVE THE RIGHT TO MAKE CHANGES IN SPECIFICATIONS AND DESIGN WITHOUT PRIOR NOTICE

1. INSTALL THE PRODUCT PROPERLY IN ACCORDANCE WITH THE INSTRUCTIONS ON LOCATION, ELECTRICAL CONNECTIONS STATED IN THE INSTRUCTION MANUAL PROVIDED.
ALLOW 10MM EXTRA SPACE AT THE INSTALLATION SITE TO MEET ANY INSTALLATION REQUIREMENTS (ADDITIONAL SPACING IS ALSO REQUIRED FOR PROPER AIR FLOW AND PIPE CONNECTIONS).
2. THE HEAT REJECTION IS BASED ON THE REACHED PULL DOWN TEMPERATURE AT AMBIENT TEMPERATURE OF 43°C AND POWER SUPPLY OF 230VAC 50HZ.
THE AMPERAGE AND ELECTRIC CONSUMPTION ARE BASED ON MEASUREMENT AT AMBIENT TEMPERATURE OF 43°C AND POWER SUPPLY OF 230VAC 50HZ.

OPTIONS	SUS 430	SCALE: NTS	TITLE	DWG. NO.	REVISION
STANDARD	HFWH127MS4	ALL DIMENSIONS ARE IN MM	REACH-IN FREEZER	0711579	A
LED VERSION	HFWH127LS4			SAP CODE	
DRAWN BY	ROSHAN	MODEL	HFWH127MS4 / HFWH127LS4		
CHECKED BY	ANAND	RELEASE DATE	27.10.2023		
APPROVED BY	PRATAP	SHEET	2 OF 2		
		RELEASE STAGE:	RELEASED		