






NOTE: COMPONENT AND ASSEMBLY MUST BE COMPLIANT TO APPLICABLE RECENT ROHS DIRECTIVES.

OPTIONS:

1. PLASTIC 90MM HEIGHT LEG ARE AVAILABLE AS OPTION.
(MACHINE OVERALL HEIGHT WILL DECREASE BY 60 MM)
2. CASTOR 124MM HEIGHT ARE AVAILABLE AS OPTION (REFER SHEET 2)
3. BOTTOM & REAR PANEL CAN BE AVAILABLE IN SUS 430.

CHANGE NOTE

REVISION	SHEET NO	ZONE	DETAILS	ECN	DATE	DRAWN

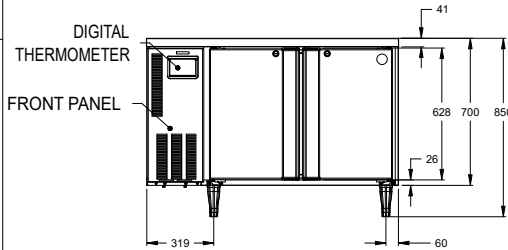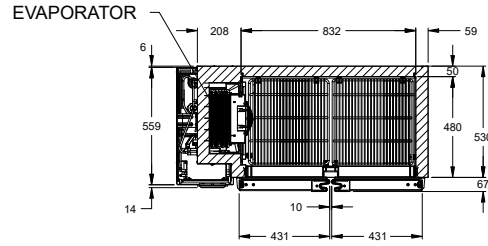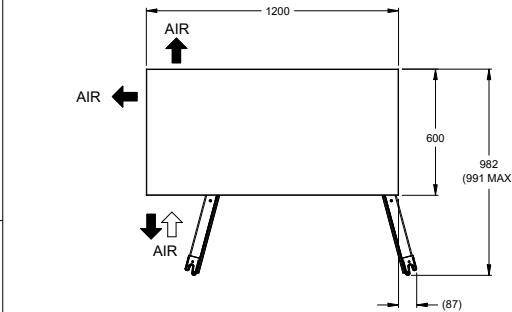



ITEM	HOSHIZAKI FREEZER
MODEL	FTWH126MS4/FTWH126LS4
POWER SUPPLY	SINGLE PHASE, 230V AC, 50HZ
RATED CURRENT	2.5 AMPS
RATED POWER	550W
HEAT REJECTION	1.083 kW
POWER CORD	10 AMPS / 3 METER
EFFECTIVE CAPACITY	223 L
OUTSIDE DIMENSIONS	1200 (W) X 600 (D) X 850 (H - WITH 150MM LEG)
INSIDE DIMENSIONS	832 (W) X 480 (D) X 588 (H)
EXTERIOR	SS 430 HAIRLINE NO 4 FINISH, GALVANIZED STEEL POWDER COATED (REAR/BOTTOM)
INTERIOR	SS 430 HAIRLINE NO 4 FINISH
INSULATION	POLYURETHANE FOAM (CFC FREE)
INSULATION FOAM BLOWING AGENT	CYCLOPENTANE
REFRIGERATION SYSTEM	FORCED AIR CIRCULATION
DEFROST STSTEM	HEATER DEFROST (295W)
COMPRESSOR	HERMETIC 650W
CONDENSER	FORCED (WIRE ON TUBE)
EVAPORATOR	FORCED (FIN & TUBE)
REFRIGERANT/ CHARGE	R-290 / 75 Gram
TEMP. CONTROL	ELECTRONIC ADJUSTABLE FROM -7°C TO -23°C
DEFROST CONTROL	BY TEMPERATURE CONTROLLER
ELECTRIC CIRCUIT PROTECTION	NON RESETTABLE FUSE (GLASS FUSE) 10 AMP
COMPRESSOR PROTECTION	MOTOR PROTECTOR
LEG	PLASTIC ADJUSTABLE 150 TO 170MM
SHELF	4 PCS
WEIGHT	NET: 93KG (GROSS: APPROX 109KG)
PACKAGE	CARTON (WOODEN PALLET) 1270MM (W) X 670MM (D) X 875MM(H)
ASSESSORIES	SHELF CLIPS
OPERATING CONDITIONS	AMBIENT TEMPERATURE : 5 - 43°C VOLTAGE RANGE RATED VOLTAGE ±6%
CABINET LAMP (FOR LS4 VERSION)	LED STRIP TYPE 700MM, 6W, DC24V
LAMP DRIVER (FOR LS4 VERSION)	ELECTRONIC DRIVER 8.5W / 12W

*WE RESERVE THE RIGHT TO MAKE CHANGES IN SPECIFICATIONS AND DESIGN WITHOUT PRIOR NOTICE

1. INSTALL THE PRODUCT PROPERLY IN ACCORDANCE WITH THE INSTRUCTIONS ON LOCATION, ELECTRICAL CONNECTIONS STATED IN THE INSTRUCTION MANUAL PROVIDED.
ALLOW 10MM EXTRA SPACE AT THE INSTALLATION SITE TO MEET ANY INSTALLATION REQUIREMENTS (ADDITIONAL SPACING IS ALSO REQUIRED FOR PROPER AIR FLOW AND PIPE CONNECTIONS).
2. THE HEAT REJECTION IS BASED ON THE REACHED PULL DOWN TEMPERATURE AT AMBIENT TEMPERATURE OF 43°C AND POWER SUPPLY OF 230VAC 50HZ.
THE AMPERAGE AND ELECTRIC CONSUMPTION ARE BASED ON MEASUREMENT AT AMBIENT TEMPERATURE OF 43°C AND POWER SUPPLY OF 230VAC 50HZ.
3. TOLERANCE ON WEIGHT IS ±5 KG

THIS ASSEMBLY DRAWING IS FOR ILLUSTRATION PURPOSE.
COMPONENTS, ASSEMBLY SEQUENCE MAY VARY DEPENDING UPON MANUFACTURING PRACTICES SPECIFIC TO MANUFACTURING LOCATIONS.
REFER PROCESS WORK INSTRUCTIONS FOR MORE DETAILS ON ASSEMBLY.
REFER SAP BOM FOR EXACT MATERIAL CONSUMPTION.





UNSPECIFIED TOLERANCES							SCALE: NTS  ALL DIMENSIONS ARE IN MM		TITLE UNDERCOUNTER FREEZER			DWG. NO: 0711906		REVISION A				
DIM	<6	6-30	30-120	120-400	400-1000	>1000				SAP CODE								
TOL	N/A	±1.0	±1.5	±2.0	±2.5	±3.0	DRAWN BY ROSHAN			MODEL FTWH126MS4/FTWH126LS4								
UNSPECIFIED TOL. ON ANGLE ±0.5																		
1 * DIMENSIONS ARE IMPORTANT.							CHECKED BY PRATAP								RELEASE DATE 20.12.2023		SHEET 1 OF 2	
2 REFERENCE DIMENSIONS ARE MARKED WITH * ()																		
3 PART SHOULD BE FREE FROM SHARP EDGES & BURRS																		
REFERENCE STANDARD							APPROVED BY PARESH			RELEASE STAGE: RELEASED								



NOTE: COMPONENT AND ASSEMBLY MUST BE COMPLIANT TO APPLICABLE RECENT ROHS DIRECTIVES.

OPTIONS:

1. BOTTOM & REAR PANEL CAN BE AVAILABLE IN SUS 430.

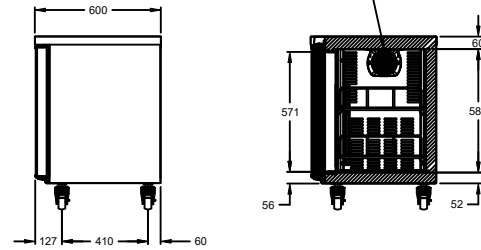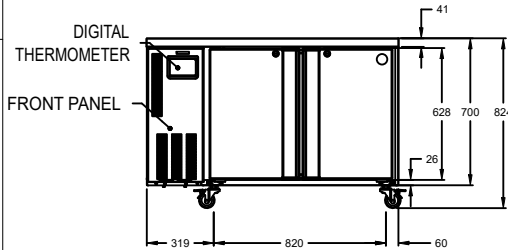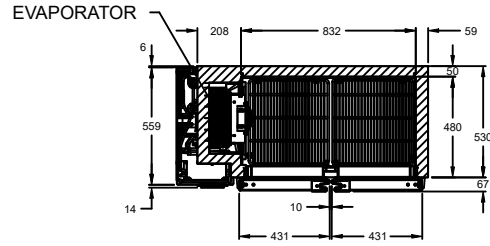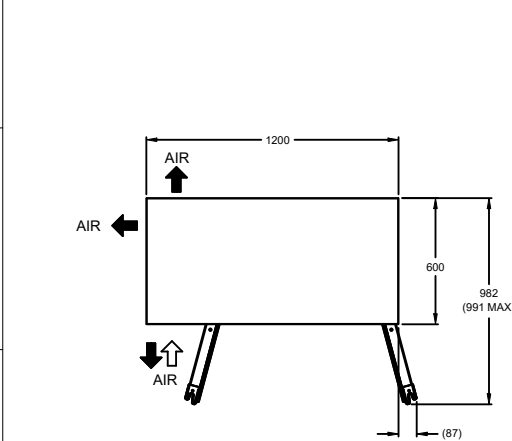

*WE RESERVE THE RIGHT TO MAKE CHANGES IN SPECIFICATIONS AND DESIGN WITHOUT PRIOR NOTICE

1. INSTALL THE PRODUCT PROPERLY IN ACCORDANCE WITH THE INSTRUCTIONS ON LOCATION, ELECTRICAL CONNECTIONS STATED IN THE INSTRUCTION MANUAL PROVIDED.
ALLOW 10MM EXTRA SPACE AT THE INSTALLATION SITE TO MEET ANY INSTALLATION REQUIREMENTS (ADDITIONAL SPACING IS ALSO REQUIRED FOR PROPER AIR FLOW AND PIPE CONNECTIONS).
2. THE HEAT REJECTION IS BASED ON THE REACHED PULL DOWN TEMPERATURE AT AMBIENT TEMPERATURE OF 43°C AND POWER SUPPLY OF 230VAC 50HZ.
THE AMPERAGE AND ELECTRIC CONSUMPTION ARE BASED ON MEASUREMENT AT AMBIENT TEMPERATURE OF 43°C AND POWER SUPPLY OF 230VAC 50HZ.
3. TOLERANCE ON WEIGHT IS ±5 KG

ITEM	HOSHIZAKI FREEZER
MODEL	FTWH126MS4/FTWH126LS4
POWER SUPPLY	SINGLE PHASE, 230V AC, 50HZ
RATED CURRENT	2.5 AMPS
RATED POWER	550W
HEAT REJECTION	1.083 kW
POWER CORD	10 AMPS / 3 METER
EFFECTIVE CAPACITY	223 L
OUTSIDE DIMENSIONS	1200 (W) X 600 (D) X 824 (H - WITH CASTOR)
INSIDE DIMENSIONS	832 (W) X 480 (D) X 588 (H)
EXTERIOR	SS 430 HAIRLINE NO 4 FINISH, GALVANIZED STEEL POWDER COATED (REAR/BOTTOM)
INTERIOR	SS 430 HAIRLINE NO 4 FINISH
INSULATION	POLYURETHANE FOAM (CFC FREE)
INSULATION FOAM BLOWING AGENT	CYCLOPENTANE
REFRIGERATION SYSTEM	FORCED AIR CIRCULATION
DEFROST STSTEM	HEATER DEFROST (295W)
COMPRESSOR	HERMETIC 650 W
CONDENSER	FORCED (WIRE ON TUBE)
EVAPORATOR	FORCED (FIN & TUBE)
REFRIGERANT/ CHARGE	R-290 / 75 Gram
TEMP. CONTROL	ELECTRONIC ADJUSTABLE FROM -7°C TO -23°C
DEFROST CONTROL	BY TEMPERATURE CONTROLLER
ELECTRIC CIRCUIT PROTECTION	NON RESETTABLE FUSE (GLASS FUSE) 10 AMP
COMPRESSOR PROTECTION	MOTOR PROTECTOR
CASTOR	4 NOS NON ADJUSTABLE
SHELF	4 PCS
WEIGHT	NET: 95KG (GROSS: APPROX 111KG)
PACKAGE	CARTON (WOODEN PALLET) 1270MM (W) X 670MM (D) X 875MM(H)
ASSESSORIES	SHELF CLIPS
OPERATING CONDITIONS	AMBIENT TEMPERATURE : 5 - 43°C VOLTAGE RANGE RATED VOLTAGE ±6%
CABINET LAMP (FOR LS4 VERSION)	LED STRIP TYPE 700MM, 6W, DC24V
LAMP DRIVER (FOR LS4 VERSION)	ELECTRONIC DRIVER 8.5W / 12W

SCALE: NTS	TITLE	DWG. NO:	REVISION
ALL DIMENSIONS ARE IN MM	UNDERCOUNTER FREEZER	0711906	A
DRAWN BY	MODEL	SAP CODE	
ROSHAN	FTWH126MS4/FTWH126LS4	-	
CHECKED BY	RELEASE DATE	SHEET	
PRATAP	20.12.2023	2 OF 2	
APPROVED BY	RELEASE STAGE:		
PARESH	RELEASED		

