


NOTE: COMPONENT AND ASSEMBLY MUST BE COMPLIANT TO APPLICABLE RECENT ROHS DIRECTIVES.

OPTIONS:



1. PLASTIC 90MM HEIGHT LEG ARE AVAILABLE AS OPTION.
(MACHINE OVERALL HEIGHT WILL DECREASE BY 60 MM)
2. CASTOR 124MM HEIGHT ARE AVAILABLE AS OPTION (REFER SHEET 2)
3. BOTTOM & REAR PANEL CAN BE AVAILABLE IN SUS 430.

CHANGE NOTE


REVISION	SHEET NO	ZONE	DETAILS	ECN	DATE	DRAWN

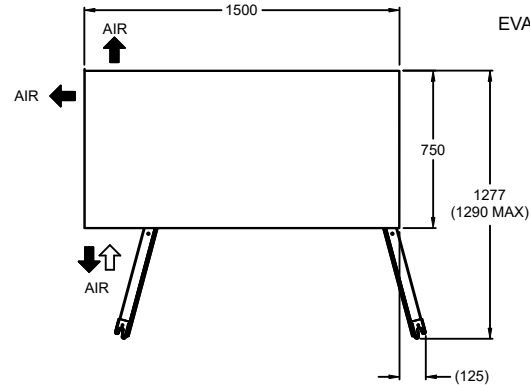

EVAPORATOR

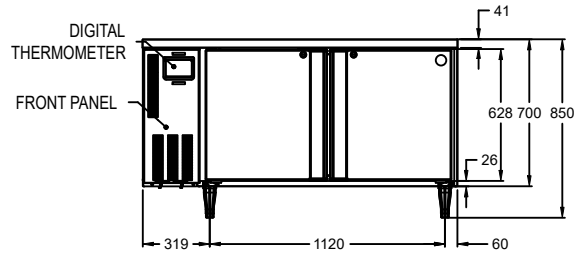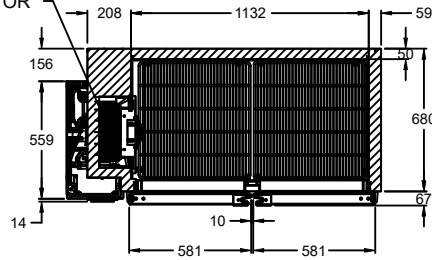

AIR DUCT OUTLET

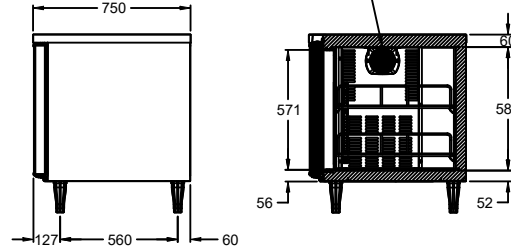


ITEM	HOSHIZAKI FREEZER
MODEL	FTWH150MS4/FTWH150LS4
POWER SUPPLY	SINGLE PHASE, 230V AC, 50HZ
AMPERAGE	2.5 AMPS
ELECTRIC CONSUMPTION	550W
HEAT REJECTION	1.083 kW
POWER CORD	10 AMPS / 3 METER
EFFECTIVE CAPACITY	408 L
OUTSIDE DIMENSIONS	1500 (W) X 750 (D) X 850 (H - WITH 150MM LEG)
INSIDE DIMENSIONS	1132 (W) X 630 (D) X 588 (H)
EXTERIOR	SS 430 HAIRLINE NO 4 FINISH, GALVANIZED STEEL POWDER COATED (REAR/BOTTOM)
INTERIOR	SS 430 HAIRLINE NO 4 FINISH
INSULATION	POLYURETHANE FOAM (CFC FREE)
INSULATION FOAM BLOWING AGENT	CYCLOPENTANE
REFRIGERATION SYSTEM	FORCED AIR CIRCULATION
DEFROST SYSTEM	HEATER DEFROST (295W)
COMPRESSOR	HERMATIC 650 W
CONDENSER	FORCED (WIRE ON TUBE)
EVAPORATOR	FORCED (FIN & TUBE)
REFRIGERANT/ CHARGE	R-290 / 75 Gram
TEMP. CONTROL	ELECTRONIC ADJUSTABLE FROM -7°C TO -23°C
DEFROST CONTROL	BY TEMPERATURE CONTROLLER
ELECTRIC CIRCUIT PROTECTION	NON RESETTABLE FUSE (GLASS FUSE) 10 AMP
COMPRESSOR PROTECTION	MOTOR PROTECTOR
LEG	PLASTIC ADJUSTABLE 150 TO 170MM
SHELF	4 PCS
WEIGHT	NET: 115KG (GROSS: APPROX 139KG)
PACKAGE	CARTON (WOODEN PALLET) 1570MM (W) X 820MM (D) X 875MM(H)
ASSESSORIES	SHELF CLIPS
OPERATING CONDITIONS	AMBIENT TEMPERATURE : 5 - 43°C VOLTAGE RANGE RATED VOLTAGE ±6%
CABINET LAMP (FOR LS4 VERSION)	LED STRIP TYPE 1000MM, 7.5W, DC24V
LAMP DRIVER (FOR LS4 VERSION)	ELECTRONIC DRIVER 8.5W / 12W

*WE RESERVE THE RIGHT TO MAKE CHANGES IN SPECIFICATIONS AND DESIGN WITHOUT PRIOR NOTICE

1. INSTALL THE PRODUCT PROPERLY IN ACCORDANCE WITH THE INSTRUCTIONS ON LOCATION, ELECTRICAL CONNECTIONS STATED IN THE INSTRUCTION MANUAL PROVIDED.
ALLOW 10MM EXTRA SPACE AT THE INSTALLATION SITE TO MEET ANY INSTALLATION REQUIREMENTS (ADDITIONAL SPACING IS ALSO REQUIRED FOR PROPER AIR FLOW AND PIPE CONNECTIONS).
2. THE HEAT REJECTION IS BASED ON THE REACHED PULL DOWN TEMPERATURE AT AMBIENT TEMPERATURE OF 43°C AND POWER SUPPLY OF 230VAC 50HZ.
THE AMPERAGE AND ELECTRIC CONSUMPTION ARE BASED ON MEASUREMENT AT AMBIENT TEMPERATURE OF 43°C AND POWER SUPPLY OF 230VAC 50HZ.
3. TOLERANCE ON WEIGHT IS ±5 KG

THIS ASSEMBLY DRAWING IS FOR ILLUSTRATION PURPOSE.
COMPONENTS, ASSEMBLY SEQUENCE MAY VARY DEPENDING UPON MANUFACTURING PRACTICES SPECIFIC TO MANUFACTURING LOCATIONS.
REFER PROCESS WORK INSTRUCTIONS FOR MORE DETAILS ON ASSEMBLY.
REFER SAP BOM FOR EXACT MATERIAL CONSUMPTION.

	ALL SUS430
STANDARD	FTWH150MS4
LED VERSION	FTWH150LS4



SCALE: NTS

ALL DIMENSIONS ARE IN MM

DRAWN BY

ROSHAN

CHECKED BY

PRATAP

APPROVED BY

PARESH

TITLE

UNDERCOUNTER
FREEZER

MODEL

FTWH150MS4/FTWH150LS4

RELEASE DATE

21.12.2023

SHEET

1 OF 2

RELEASE STAGE:

RELEASED

DWG. NO:


0711908

SAP CODE

-





REVISION

A



NOTE: COMPONENT AND ASSEMBLY MUST BE COMPLIANT TO APPLICABLE RECENT ROHS DIRECTIVES.

OPTIONS:
1. BOTTOM & REAR PANEL CAN BE AVAILABLE IN SUS 430

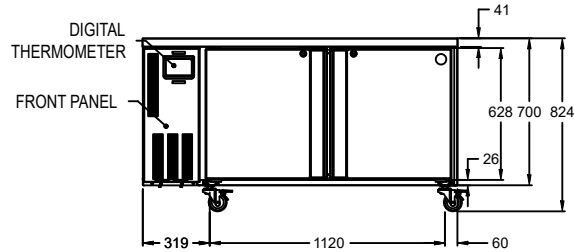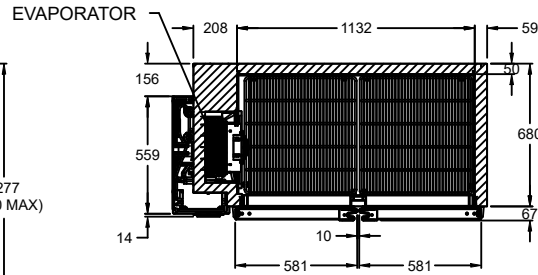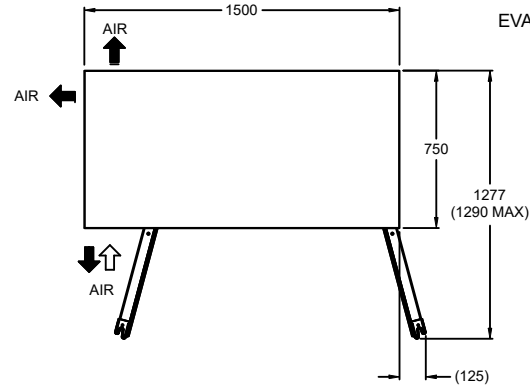

*WE RESERVE THE RIGHT TO MAKE CHANGES IN SPECIFICATIONS AND DESIGN WITHOUT PRIOR NOTICE

1. INSTALL THE PRODUCT PROPERLY IN ACCORDANCE WITH THE INSTRUCTIONS ON LOCATION, ELECTRICAL CONNECTIONS STATED IN THE INSTRUCTION MANUAL PROVIDED.
ALLOW 10MM EXTRA SPACE AT THE INSTALLATION SITE TO MEET ANY INSTALLATION REQUIREMENTS (ADDITIONAL SPACING IS ALSO REQUIRED FOR PROPER AIR FLOW AND PIPE CONNECTIONS).
2. THE HEAT REJECTION IS BASED ON THE REACHED PULL DOWN TEMPERATURE AT AMBIENT TEMPERATURE OF 43°C AND POWER SUPPLY OF 230VAC 50HZ.
THE AMPERAGE AND ELECTRIC CONSUMPTION ARE BASED ON MEASUREMENT AT AMBIENT TEMPERATURE OF 43°C AND POWER SUPPLY OF 230VAC 50HZ.
3. TOLERANCE ON WEIGHT IS ± 5 KG

ITEM	HOSHIZAKI FREEZER
MODEL	FTWH150MS4/FTWH150LS4
POWER SUPPLY	SINGLE PHASE, 230V AC, 50HZ
AMPERAGE	2.5 AMPS
ELECTRIC CONSUMPTION	550W
HEAT REJECTION	1.083 kW
POWER CORD	10 AMPS / 3 METER
EFFECTIVE CAPACITY	408 L
OUTSIDE DIMENSIONS	1500 (W) X 750 (D) X 824 (H - WITH CASTOR)
INSIDE DIMENSIONS	1132 (W) X 630 (D) X 588 (H)
EXTERIOR	SS 430 HAIRLINE NO 4 FINISH, GALVANIZED STEEL POWDER COATED (REAR/BOTTOM)
INTERIOR	SS 430 HAIRLINE NO 4 FINISH
INSULATION	POLYURETHANE FOAM (CFC FREE)
INSULATION FOAM BLOWING AGENT	CYCLOPENTANE
REFRIGERATION SYSTEM	FORCED AIR CIRCULATION
DEFROST SYSTEM	HEATER DEFROST (295W)
COMPRESSOR	HERMATIC 650 W
CONDENSER	FORCED (WIRE ON TUBE)
EVAPORATOR	FORCED (FIN & TUBE)
REFRIGERANT/ CHARGE	R-290 / 75 Gram
TEMP. CONTROL	ELECTRONIC ADJUSTABLE FROM -7°C TO -23°C
DEFROST CONTROL	BY TEMPERATURE CONTROLLER
ELECTRIC CIRCUIT PROTECTION	NON RESETTABLE FUSE (GLASS FUSE) 10 AMP
COMPRESSOR PROTECTION	MOTOR PROTECTOR
CASTOR	4 NOS NON ADJUSTABLE
SHELF	4 PCS
WEIGHT	NET: 117KG (GROSS: APPROX 141KG)
PACKAGE	CARTON (WOODEN PALLET) 1570MM (W) X 820MM (D) X 875MM(H)
ACCESSORIES	SHELF CLIPS
OPERATING CONDITIONS	AMBIENT TEMPERATURE : 5 - 43°C VOLTAGE RANGE RATED VOLTAGE $\pm 6\%$
CABINET LAMP (FOR LS4 VERSION)	LED STRIP TYPE 1000MM, 7.5W, DC24V
LAMP DRIVER (FOR LS4 VERSION)	ELECTRONIC DRIVER 8.5W / 12W

STANDARD	ALL SUS430 FTWH150MS4	TITLE	UNDERCOUNTER FREEZER	DWG. NO:	0711908	REVISION	A
LED VERSION	FTWH150LS4	SCALE: NTS		SAP CODE	-		
DRAWN BY	ROSHAN	MODEL	FTWH150MS4/FTWH150LS4				
CHECKED BY	PRATAP	RELEASE DATE	21.12.2023	SHEET	2 OF 2		
APPROVED BY	PARESH	RELEASE STAGE:	RELEASED				

