






THIS DRAWING AND THE INFORMATION CONTAINED HEREIN IS PROPRIETARY TO M/S WESTERN REFRIGERATION PVT. LTD. IT SHALL NOT BE REPRODUCED, COPIED OR DISCLOSED, IN WHOLE OR IN PART OR USED FOR MANUFACTURE OR FOR OTHER PURPOSE WITHOUT THE WRITTEN PERMISSION OF M/S WESTERN REFRIGERATION PVT. LTD.

WRI/PCDC/15,
REV/A
DATE 01.03.2022

NOTE: COMPONENT AND ASSEMBLY MUST BE COMPLIANT TO APPLICABLE RECENT ROHS DIRECTIVES.

OPTIONS:

1. PLASTIC 90MM HEIGHT LEG ARE AVAILABLE AS OPTION. (MACHINE OVERALL HEIGHT WILL DECREASE BY 60 MM)
2. CASTOR 124MM HEIGHT ARE AVAILABLE AS OPTION (REFER SHEET 2)
3. BOTTOM & REAR PANEL CAN BE AVAILABLE IN SUS 430.

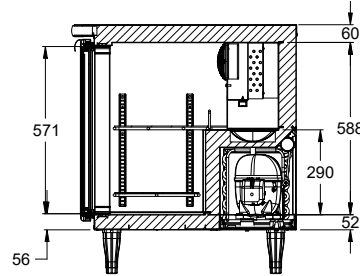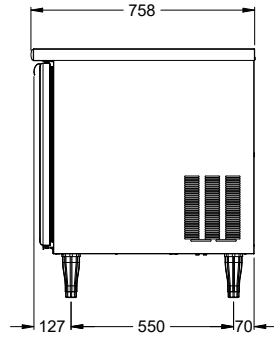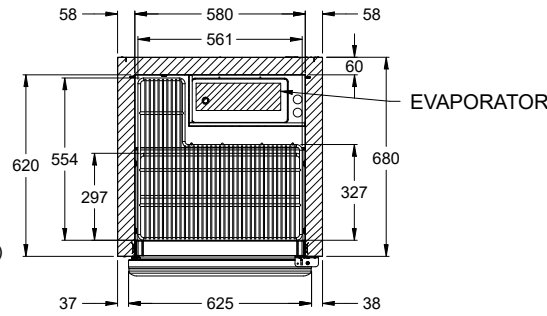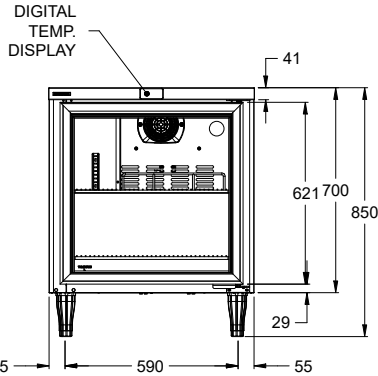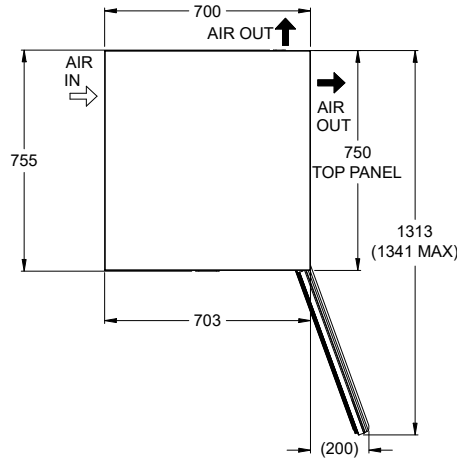




*WE RESERVE THE RIGHT TO MAKE CHANGES IN SPECIFICATIONS AND DESIGN WITHOUT PRIOR NOTICE

1. INSTALL THE PRODUCT PROPERLY IN ACCORDANCE WITH THE INSTRUCTIONS ON LOCATION, ELECTRICAL CONNECTIONS STATED IN THE INSTRUCTION MANUAL PROVIDED. ALLOW 10MM EXTRA SPACE AT THE INSTALLATION SITE TO MEET ANY INSTALLATION REQUIREMENTS (ADDITIONAL SPACING IS ALSO REQUIRED FOR PROPER AIR FLOW AND PIPE CONNECTIONS)
2. THE HEAT REJECTION IS BASED ON THE REACHED PULL DOWN TEMPERATURE AT AMBIENT TEMPERATURE OF 43°C AND POWER SUPPLY OF 230VAC 50HZ. THE AMPERAGE AND ELECTRIC CONSUMPTION ARE BASED ON MEASUREMENT AT AMBIENT TEMPERATURE OF 43°C AND POWER SUPPLY OF 230VAC 50HZ.
3. TOLERANCE ON WEIGHT IS ± 5 KG

THIS ASSEMBLY DRAWING IS FOR ILLUSTRATION PURPOSE.
COMPONENTS, ASSEMBLY SEQUENCE MAY VARY DEPENDING UPON MANUFACTURING PRACTICES SPECIFIC TO MANUFACTURING LOCATIONS.
REFER PROCESS WORK INSTRUCTIONS FOR MORE DETAILS ON ASSEMBLY.
REFER SAP BOM FOR EXACT MATERIAL CONSUMPTION.

REVISION		SHEET NO	ZONE	CHANGE NOTE		ECN	DATE	DRAWN
				DETAILS				

ITEM	HOSHIZAKI REFRIGERATOR
MODEL	RTWH70LS4-GD
POWER SUPPLY	SINGLE PHASE, 230V AC, 50HZ
RATED CURRENT	1.1 AMPS
RATED POWER	230 W
HEAT REJECTION	0.397 kW
POWER CORD	10 AMPS / 3 METER
EFFECTIVE CAPACITY	148L
OUTSIDE DIMENSIONS	700 (W) X 755 (INCLUDING TEMP. CONTROLLER) (D) X 850 (H - WITH 150MM LEG)
INSIDE DIMENSIONS	580 (W) X 620 (D) X 588 (H)
EXTERIOR	SS 430 HAIRLINE NO 4 FINISH, GALVANIZED STEEL POWDER COATED (REAR/BOTTOM)
INTERIOR	SS 430 HAIRLINE NO 4 FINISH
INSULATION	POLYURETHANE FOAM (CFC FREE)
INSULATION FOAM BLOWING AGENT	CYCLOPENTANE
REFRIGERATION SYSTEM	FORCED AIR CIRCULATION
DEFROST SYSTEM	IN COMPRESSOR OFF CYCLE
COMPRESSOR	HERMETIC 262 W
CONDENSER	FORCED (WIRE ON TUBE)
EVAPORATOR	FORCED (FIN & TUBE)
REFRIGERANT/ CHARGE	R-290 / 57 gram
TEMP. CONTROL	ELECTRONIC ADJUSTABLE FROM -2°C TO 12°C
DEFROST CONTROL	BY TEMPERATURE CONTROLLER
ELECTRIC CIRCUIT PROTECTION	NON RESETTABLE FUSE (GLASS FUSE) 10 AMP
COMPRESSOR PROTECTION	MOTOR PROTECTOR
LEG	PLASTIC ADJUSTABLE 150 TO 170MM
SHELF	2 PCS
WEIGHT	NET:71KG (GROSS: APPROX 86KG)
PACKAGE	CARTON (WOODEN PALLET) 770MM (W) X 820MM (D) X 875MM(H)
ASSESSORIES	9 NOS. SHELF CLIPS
OPERATING CONDITIONS	AMBIENT TEMPERATURE : 5 - 43°C VOLTAGE RANGE RATED VOLTAGE $\pm 6\%$
CABINET LAMP (FOR LS4 VERSION)	LED STRIP TYPE 525MM, 4W, DC24V
LAMP DRIVER (FOR LS4 VERSION)	ELECTRONIC DRIVER 8.5W/12W






UNSPECIFIED TOLERANCES							 SCALE: NTS ALL DIMENSIONS ARE IN MM	TITLE UNDERCOUNTER GLASS DOOR REFRIGERATOR			DWG. NO. 0711894	REVISION A						
DIM	<6	6-30	30-120	120-400	400-1000	>1000					SAP CODE --							
TOL	N/A	±1.0	±1.5	±2.0	±2.5	±3.0		DRAWN BY PRASHANT			MODEL RTWH70LS4-GD							
UNSPECIFIED TOL. ON ANGLE ±0.5							CHECKED BY ANAND			RELEASE DATE 02.01.2024	SHEET 1 OF 2							
1 *  DIMENSIONS ARE IMPORTANT. 2 REFERENCE DIMENSIONS ARE MARKED WITH "()" 3 PART SHOULD BE FREE FROM SHARP EDGES & BURRS							APPROVED BY PRATAP			RELEASE STAGE: RELEASED								
							REFERENCE STANDARD -											

THIS DRAWING AND THE INFORMATION CONTAINED HEREIN IS PROPRIETARY TO M/S WESTERN REFRIGERATION PVT. LTD. IT SHALL NOT BE REPRODUCED, COPIED OR DISCLOSED, IN WHOLE OR IN PART OR USED FOR MANUFACTURE OR FOR OTHER PURPOSE WITHOUT THE WRITTEN PERMISSION OF M/S WESTERN REFRIGERATION PVT. LTD.

WRL/PCDC/15,
REV/A
DATE 01.03.2022

NOTE: COMPONENT AND ASSEMBLY MUST BE COMPLIANT TO APPLICABLE RECENT ROHS DIRECTIVES.



OPTIONS:
1. BOTTOM & REAR PANEL CAN BE AVAILABLE IN SUS 430.

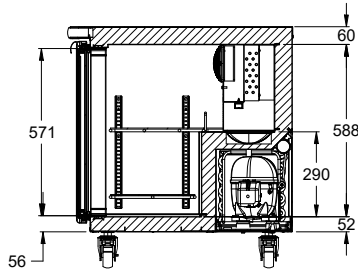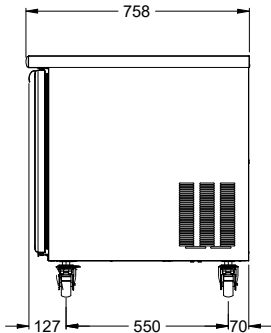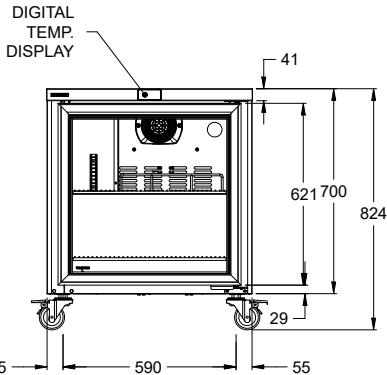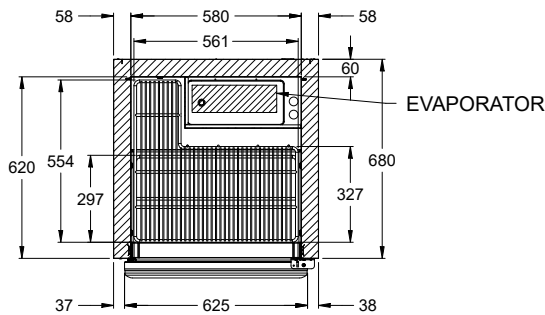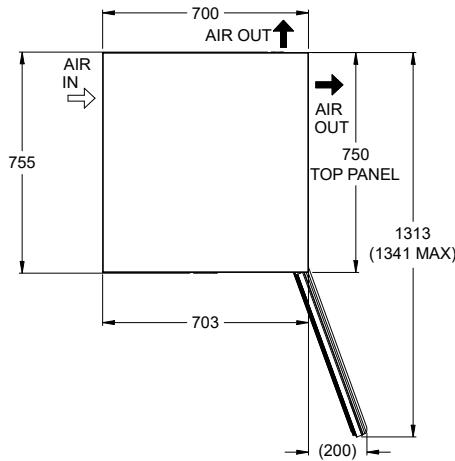

*WE RESERVE THE RIGHT TO MAKE CHANGES IN SPECIFICATIONS AND DESIGN WITHOUT PRIOR NOTICE

1. INSTALL THE PRODUCT PROPERLY IN ACCORDANCE WITH THE INSTRUCTIONS ON LOCATION, ELECTRICAL CONNECTIONS STATED IN THE INSTRUCTION MANUAL PROVIDED. ALLOW 10MM EXTRA SPACE AT THE INSTALLATION SITE TO MEET ANY INSTALLATION REQUIREMENTS (ADDITIONAL SPACING IS ALSO REQUIRED FOR PROPER AIR FLOW AND PIPE CONNECTIONS)
2. THE HEAT REJECTION IS BASED ON THE REACHED PULL DOWN TEMPERATURE AT AMBIENT TEMPERATURE OF 43°C AND POWER SUPPLY OF 230VAC 50HZ. THE AMPERAGE AND ELECTRIC CONSUMPTION ARE BASED ON MEASUREMENT AT AMBIENT TEMPERATURE OF 43°C AND POWER SUPPLY OF 230VAC 50HZ.
3. TOLERANCE ON WEIGHT IS ± 5 KG

ITEM	HOSHIZAKI REFRIGERATOR
MODEL	RTWH70LS4-GD
POWER SUPPLY	SINGLE PHASE, 230V AC, 50HZ
RATED CURRENT	1.1 AMPS
RATED POWER	230 W
HEAT REJECTION	0.397 kW
POWER CORD	10 AMPS / 3 METER
EFFECTIVE CAPACITY	148L
OUTSIDE DIMENSIONS	700 (W) X 755 (INCLUDING TEMP. CONTROLLER) (D) X 824 (H - WITH CASTOR)
INSIDE DIMENSIONS	580 (W) X 620 (D) X 588 (H)
EXTERIOR	SS 430 HAIRLINE NO 4 FINISH, GALVANIZED STEEL POWDER COATED (REAR/BOTTOM)
INTERIOR	SS 430 HAIRLINE NO 4 FINISH
INSULATION	POLYURETHANE FOAM (CFC FREE)
INSULATION FOAM BLOWING AGENT	CYCLOPENTANE
REFRIGERATION SYSTEM	FORCED AIR CIRCULATION
DEFROST SYSTEM	IN COMPRESSOR OFF CYCLE
COMPRESSOR	HERMETIC 262 W
CONDENSER	FORCED (WIRE ON TUBE)
EVAPORATOR	FORCED (FIN & TUBE)
REFRIGERANT/ CHARGE	R-290 / 57 gram
TEMP. CONTROL	ELECTRONIC ADJUSTABLE FROM -2°C TO 12°C
DEFROST CONTROL	BY TEMPERATURE CONTROLLER
ELECTRIC CIRCUIT PROTECTION	NON RESETTABLE FUSE (GLASS FUSE) 10 AMP
COMPRESSOR PROTECTION	MOTOR PROTECTOR
CASTOR	4 NOS, NON ADJUSTABLE
SHELF	2 PCS
WEIGHT	NET: 73KG (GROSS: APPROX 88KG)
PACKAGE	CARTON (WOODEN PALLET) 770MM (W) X 820MM (D) X 875MM(H)
ASSESSORIES	9 NOS. SHELF CLIPS
OPERATING CONDITIONS	AMBIENT TEMPERATURE : 5 - 43°C VOLTAGE RANGE RATED VOLTAGE $\pm 6\%$
CABINET LAMP (FOR LS4 VERSION)	LED STRIP TYPE 525MM, 4W, DC24V
LAMP DRIVER (FOR LS4 VERSION)	ELECTRONIC DRIVER 8.5W/12W
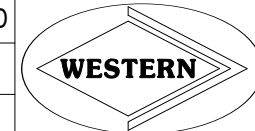
<div>SCALE: NTS</div> <div></div> <div>ALL DIMENSIONS ARE IN MM</div>	<div>TITLE</div> <div>UNDERCOUNTER GLASS DOOR REFRIGERATOR</div>		<div>DWG. NO:</div> <div>0711894</div>	<div>REVISION</div> <div>A</div>
			<div>SAP CODE</div> <div>--</div>	
<div>DRAWN BY</div> <div>PRASHANT</div>	<div>MODEL</div> <div>RTWH70LS4-GD</div>		<div></div>	
<div>CHECKED BY</div> <div>ANAND</div>	<div>RELEASE DATE</div> <div>02.01.2024</div>	<div>SHEET</div> <div>2 OF 2</div>		
<div>APPROVED BY</div> <div>PRATAP</div>	<div>RELEASE STAGE:</div> <div>RELEASED</div>			