

THIS DRAWING AND THE INFORMATION CONTAINED HEREIN IS PROPRIETARY TO M/S WESTERN REFRIGERATION PVT. LTD. IT SHALL NOT BE REPRODUCED, COPIED OR DISCLOSED, IN WHOLE OR IN PART OR USED FOR MANUFACTURE OR FOR OTHER PURPOSE WITHOUT THE WRITTEN PERMISSION OF M/S WESTERN REFRIGERATION PVT. LTD.


WRL/PDC/15,
REV/A
DATE 01.03.2022

NOTE: COMPONENT AND ASSEMBLY MUST BE COMPLIANT TO APPLICABLE RECENT ROHS DIRECTIVES.


- OPTIONS:
1. PLASTIC 90MM HEIGHT LEG ARE AVAILABLE AS OPTION.
(MACHINE OVERALL HEIGHT WILL DECREASE BY 60 MM)
 2. CASTOR 124MM HEIGHT ARE AVAILABLE AS OPTION (REFER SHEET 2).
 3. BOTTOM & REAR PANEL CAN BE AVAILABLE IN SUS 430.

CHANGE NOTE


| REVISION | SHEET NO | ZONE | DETAILS | ECN | DATE | DRAWN |
|----------|----------|------|---------|-----|------|-------|
| | | | | | | |
| | | | | | | |
| | | | | | | |

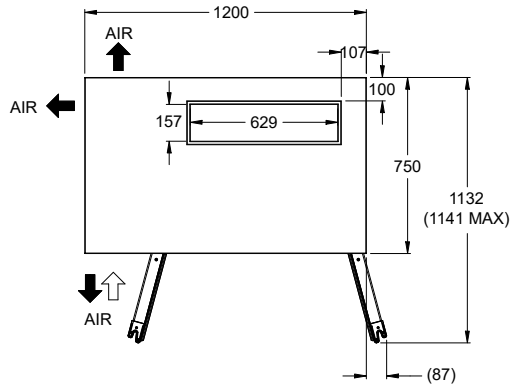



EVAPORATOR

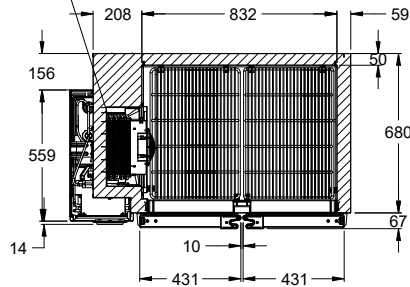

AIR DUCT OUTLET



DIGITAL THERMOMETER
FRONT PANEL

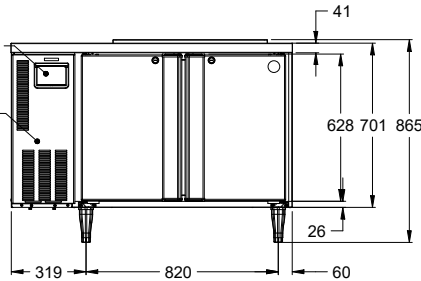



GN TRAY CONFIGURATION:

- 1/6 x 4
1/3 x 2
1/9 x 6

*WE RESERVE THE RIGHT TO MAKE CHANGES IN SPECIFICATIONS AND DESIGN WITHOUT PRIOR NOTICE

1. INSTALL THE PRODUCT PROPERLY IN ACCORDANCE WITH THE INSTRUCTIONS ON LOCATION, ELECTRICAL CONNECTIONS STATED IN THE INSTRUCTION MANUAL PROVIDED.
ALLOW 10MM EXTRA SPACE AT THE INSTALLATION SITE TO MEET ANY INSTALLATION REQUIREMENTS (ADDITIONAL SPACING IS ALSO REQUIRED FOR PROPER AIR FLOW AND PIPE CONNECTIONS).
2. THE HEAT REJECTION IS BASED ON THE REACHED PULL DOWN TEMPERATURE AT AMBIENT TEMPERATURE OF 43°C AND POWER SUPPLY OF 230VAC 50HZ.
THE AMPERAGE AND ELECTRIC CONSUMPTION ARE BASED ON MEASUREMENT AT AMBIENT TEMPERATURE OF 43°C AND POWER SUPPLY OF 230VAC 50HZ.
3. TOLERANCE ON WEIGHT IS ± 5 KG

THIS ASSEMBLY DRAWING IS FOR ILLUSTRATION PURPOSE.
COMPONENTS, ASSEMBLY SEQUENCE MAY VARY DEPENDING UPON MANUFACTURING PRACTICES SPECIFIC TO MANUFACTURING LOCATIONS.
REFER PROCESS WORK INSTRUCTIONS FOR MORE DETAILS ON ASSEMBLY.
REFER SAP BOM FOR EXACT MATERIAL CONSUMPTION.


| | | | | | | | | | | | | | | | | | |
|--|-----|------|--------|---------|----------|-------|--|-----------------------------|--|-----------------|--|--|---------------------|--|---------------|--|--|
| UNSPECIFIED TOLERANCES | | | | | | | <div>SCALE: NTS</div> <div></div> <div>ALL DIMENSIONS ARE IN MM</div> | TITLE | | | UNDERCOUNTER REFRIGERATOR | | DWG. NO: 0711945 | | REVISION A | | |
| DIM | <6 | 6-30 | 30-120 | 120-400 | 400-1000 | >1000 | | SAP CODE | | | - | | | | | | |
| TOL | N/A | ±1.0 | ±1.5 | ±2.0 | ±2.5 | ±3.0 | | | | | | | | | | | |
| UNSPECIFIED TOL. ON ANGLE ±0.5 | | | | | | | DRAWN BY RAHUL | MODEL RTWH120MS4/LS4-GNT | | | <div></div> | | | | | | |
| 1 "C": DIMENSIONS ARE IMPORTANT. | | | | | | | CHECKED BY PRASHANT | RELEASE DATE 02.01.2024 | | SHEET 1 OF 2 | | | | | | | |
| 2 REFERENCE DIMENSIONS ARE MARKED WITH "I, J" | | | | | | | | | | | | | | | | | |
| 3 PART SHOULD BE FREE FROM SHARP EDGES & BURRS | | | | | | | | | | | | | | | | | |
| REFERENCE STANDARD - | | | | | | | APPROVED BY PRATAP | RELEASE STAGE: RELEASED | | | | | | | | | |

1. " " DIMENSIONS ARE IMPORTANT.
2. REFERENCE DIMENSIONS ARE MARKED WITH " () " PART SHOULD BE FREE FROM SHARP EDGES & BURRS
- 3.




APPROVED BY
PRATAP

RELEASE DATE
02.01.2024

SHEET
1 OF 2



OPTIONS:
1. BOTTOM & REAR PANEL CAN BE AVAILABLE IN SUS 304.

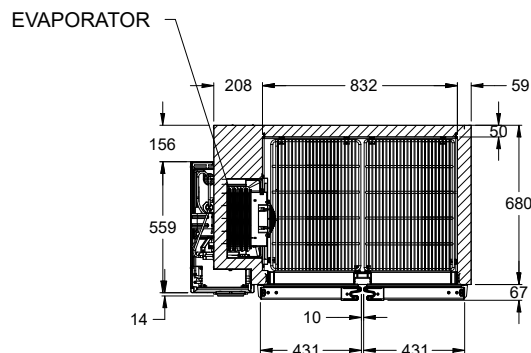
$$\begin{array}{l} 1/6 \times 4 \\ 1/3 \times 2 \\ 1/9 \times 6 \end{array}$$

1. INSTALL THE PRODUCT PROPERLY IN ACCORDANCE WITH THE INSTRUCTIONS ON LOCATION, ELECTRICAL CONNECTIONS STATED IN THE INSTRUCTION MANUAL PROVIDED.
ALLOW 10MM EXTRA SPACE AT THE INSTALLATION SITE TO MEET ANY INSTALLATION REQUIREMENTS (ADDITIONAL SPACING IS ALSO REQUIRED FOR PROPER AIR FLOW AND PIPE CONNECTIONS).
2. THE HEAT REJECTION IS BASED ON THE REACHED PULL DOWN TEMPERATURE AT AMBIENT TEMPERATURE OF 43°C AND POWER SUPPLY OF 230VAC 50HZ.
THE AMPERAGE AND ELECTRIC CONSUMPTION ARE BASED ON MEASUREMENT AT AMBIENT TEMPERATURE OF 43°C AND POWER SUPPLY OF 230VAC 50HZ.
3. TOLERANCE ON WEIGHT IS ± 5 KG.

| | | | |
|-------------|-----------------|-------------------------------|---------------------------------|
| | ALL SUS430 | LAMP DRIVER (FOR LS4 VERSION) | LED STRIP TYPE 700MM, 6W, DC24V |
| STANDARD | RTWH120MS4-GNT | LAMP DRIVER (FOR LS4 VERSION) | ELECTRONIC DRIVER 8.5W / 12W |
| LED VERSION | RTWH120I S4-GNT | | |

