


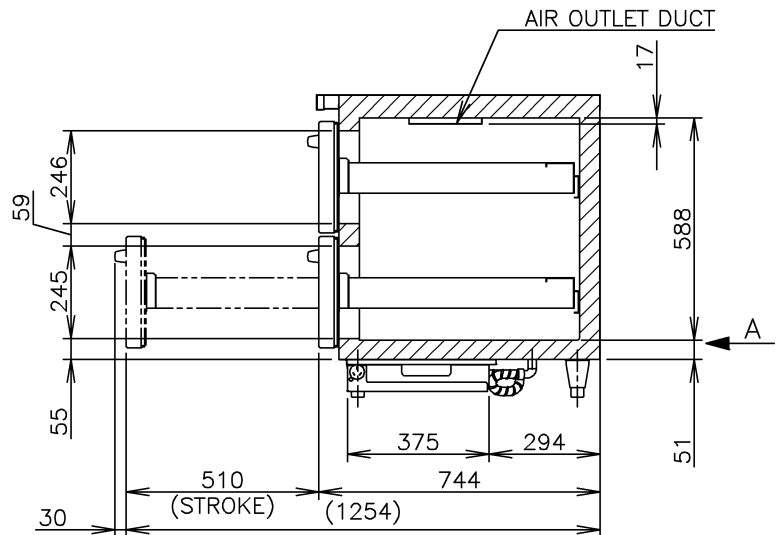
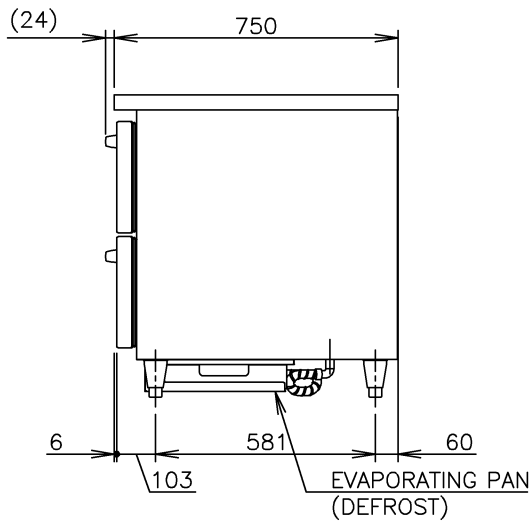
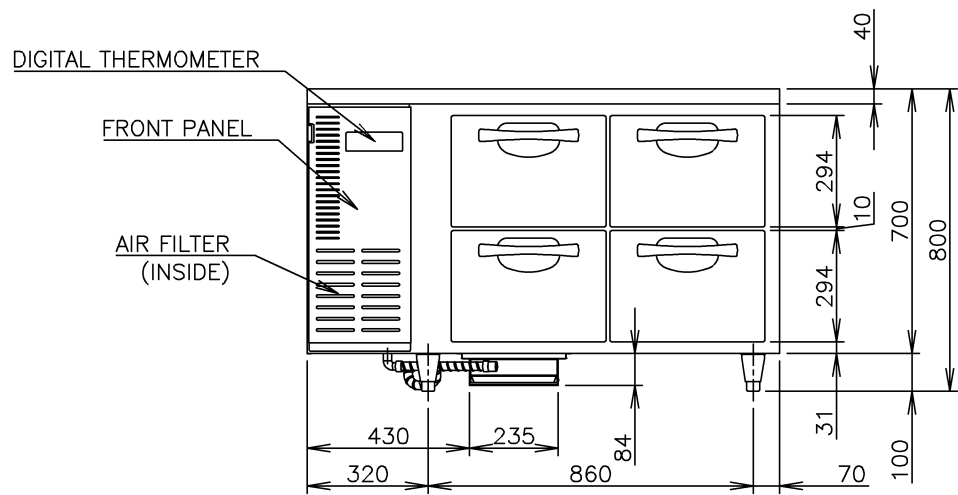


VIEW A (1/10)

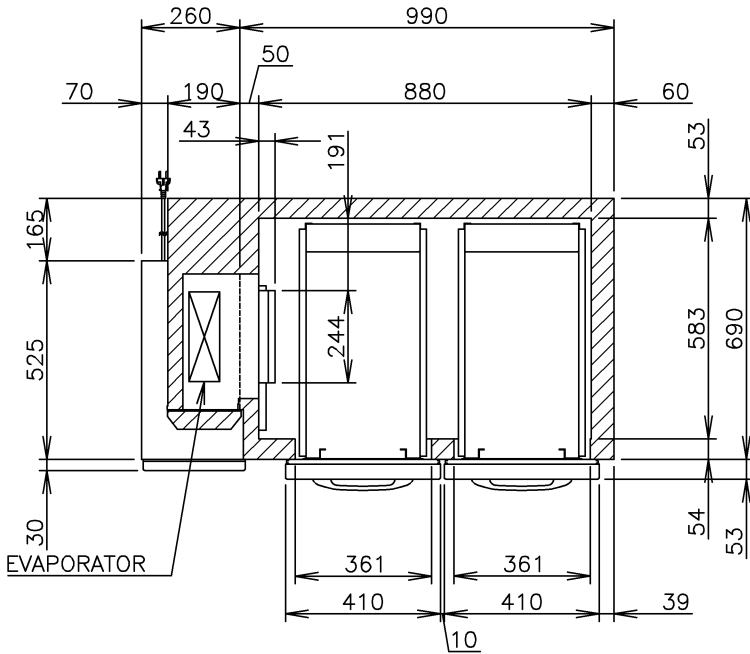

PLUG SHAPE (1/10)

1. Install the product properly in accordance with the instructions on location, electrical connections stated in the instruction manual provided. Allow 10mm extra space at the installation site to meet any installation requirements (additional spacing is also required for proper air flow and pipe connections).
2. The heat rejection is based on the reached pulldown temperature at ambient temperature of 32° C and power supply of 220V 50Hz. The ampereage and electric consumption are based on measurements at ambient temperature of 32° C and power supply of 220V 50Hz.
3. The cabinet temperature range of -6 to 12° C is guaranteed at ambient temperature of 30° C.
4. Product code: T012-C820

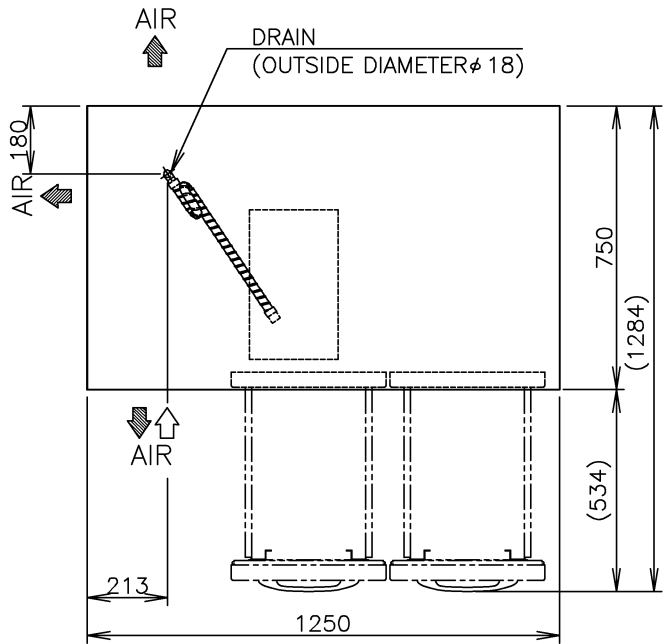

|                                |  |
|--------------------------------|--|
| ITEM                           | Hoshizaki Drawer Type Undercounter Refrigerator                              |
| MODEL                          | RTC-125DDA-GN-4D   |
| POWER SUPPLY                   | 1 Phase 220-240V 50Hz Capacity: 0.54kVA(2.5A)                                |
| AMPERAGE                       | Rated: 2.2A  |
| ELECTRIC CONSUMPTION           | Motor: *W(Power Factor: *) Heater: 248W<br>Refrigeration: 315W Defrost: 248W |
| HEAT REJECTION                 | *W   |
| POWER CORD                     | 2.8m (Plug with Earth Wire)  |
| EFFECTIVE CAPACITY             | 296L   |
| OUTSIDE DIMENSIONS             | 1250mm(W) x 750mm(D) x 800mm(H) (790-830)mm                                  |
| INSIDE DIMENSIONS              | 880mm(W) x 583mm(D) x 588mm(H)   |
| EXTERIOR                       | Stainless Steel, Galvanized Steel (Rear/Bottom)                              |
| INTERIOR                       | Stainless Steel, ABS Plastic   |
| INSULATION                     | Polyurethane Foam  |
| INSULATION FOAM BLOWING AGENT  | Cyclopentane   |
| REFRIGERATION SYSTEM           | Forced Air Circulation   |
| DEFROST SYSTEM                 | Glass Tube Heater  |
| COMPRESSOR                     | Hermetic 215W  |
| CONDENSER                      | Fin and Tube type, Air-cooled  |
| EVAPORATOR                     | Fin and Tube Type  |
| REFRIGERANT                    | R134a/150g   |
| TEMPERATURE CONTROL            | Microprocessor (Digital Temp Indication) Adjustable from -6 to 12°C          |
| DEFROST CONTROL                | Microprocessor Controlled  |
| ELECTRIC CIRCUIT PROTECTION    | Fuse, Earth Wire   |
| REFRIGERANT CIRCUIT PROTECTION | Motor Protector  |
| LEG                            | Plastic Adjustable 90 - 130mm  |
| WEIGHT                         | 109kg (Gross Approx. *kg)  |
| PACKAGE                        | Carton 1315mm(W) x 830mm(D) x 790mm(H)                                       |
| OPERATING CONDITIONS           | Ambient Temperature: 5-43° C<br>Voltage Range: Rated Voltage±6%              |

\*We reserve the right to make changes in specifications and design without prior notice.