

POWER CORD 2800 LONG OUTSIDE

(PLUG WITH EARTH WIRE)

HOSHIZAKI







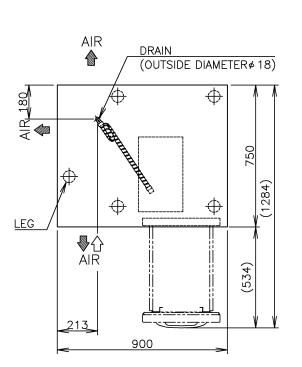

VIEW A (1/10)

<u>45</u>

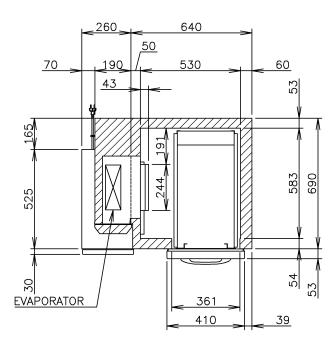

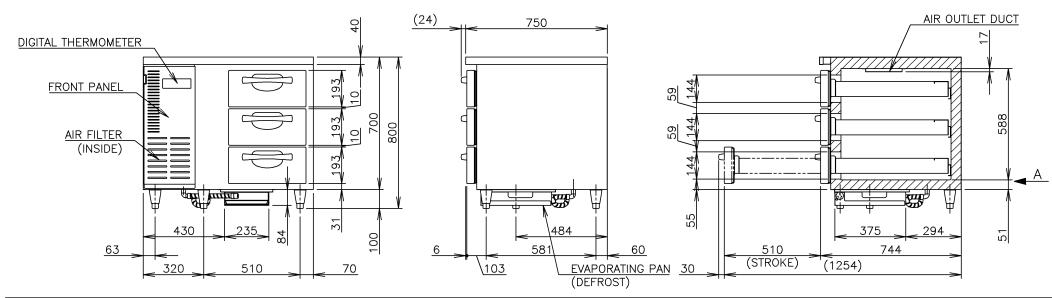

	ITEM	Hoshizaki Drawer Type Undercounter Refrigerator					
	MODEL	RTC-90DDA-GN-3D					
	POWER SUPPLY	1 Phase 220—240V 50Hz Capacity: 0.42kVA(1.91A)					
<u> </u>	AMPERAGE	Rated: 1.5A					
<u> </u>	ELECTRIC CONSUMPTION	Motor: *W(Power Factor: *%) Heater: 243W Refrigeration: 225W Defrost: 243W					
	HEAT REJECTION	*W					
	POWER CORD	2.8m (Plug with Earth Wire)					
Λ	EFFECTIVE CAPACITY	176L					
	OUTSIDE DIMENSIONS	900mm(W) x 750mm(D) x 800mm(H) (790-830)mm					
	INSIDE DIMENSIONS	530mm(W) x 583mm(D) x 588mm(H)					
	EXTERIOR	Stainless Steel, Galvanized Steel (Rear/Botton					
	INTERIOR	Stainless Steel, ABS Plastic					
	INSULATION	Polyurethane Foam					
	INSULATION FOAM BLOWING AGENT	Cyclopentane					
	REFRIGERATION SYSTEM	Forced Air Circulation					
	DEFROST SYSTEM	Glass Tube Heater					
	COMPRESSOR	Hermetic 110W					
	CONDENSER	Fin and Tube type, Air—cooled					
	EVAPORATOR	Fin and Tube Type					
	REFRIGERANT	R134a/160g					
	TEMPERATURE CONTROL	Microprocessor (Digital Temp Indication) Adjustable from −6 to 12°C					
	DEFROST CONTROL	Microprocessor Controlled					
	ELECTRIC CIRCUIT PROTECTION	Fuse, Earth Wire					
Ī	REFRIGERANT CIRCUIT PROTECTION	Motor Protector					
	LEG	Plastic Adjustable 90 — 130mm					
<u>A</u>	WEIGHT	85kg (Gross Approx. *kg)					
	PACKAGE	Carton 965mm(W) x 830mm(D) x 790mm(H)					
	OPERATING CONDITIONS	Ambient Temperature: 5-43° C Voltage Range: Rated Voltage±6%					
	*We reserve the right t	o make changes in specifications and design without prior notice.					

*We reserve the right to make changes in specifications and design without prior notice.

- 1. Install the product properly in accordance with the instructions on location, electrical connections stated in the instruction manual provided. Allow 10mm extra space at the installation site to meet any installation requirements(additional spacing is also required for proper air flow and pipe connections).
- 2. The heat rejection is based on the reached pulldown temperature at ambient temperature of 32° C and power supply of 220V 50Hz. The amperage and electric consumption are based on measurements at ambient temperature of 32° C and power supply of 220V 50Hz.
- 3. The cabinet temperature range of -6 to 12° C is guaranteed at ambient temperature of 30° C.
- 4. Product code: T012-C810

	APPROVED CHECKED YAMASAK ONDA KAWAKAMI 1 APPROVED DESIGNED SYMBO		LOILLD	DESIGNED KAWAKAMI		AWN HIKORI	SCALE 1	/20	TRIGON	OMETRY
			\triangle	2015.11.0	.09 DATE 2015		DRAWING N).	SYMBOL
			SYMBOL	DATE			5.02.13	D15492		