








POWER CORD 2300 LONG OUTSIDE
(PLUG WITH EARTH WIRE)

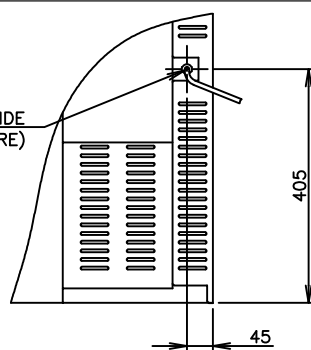

VIEW A (1/10)



PLUG

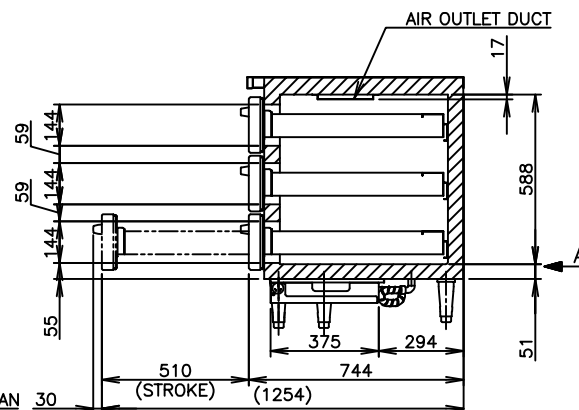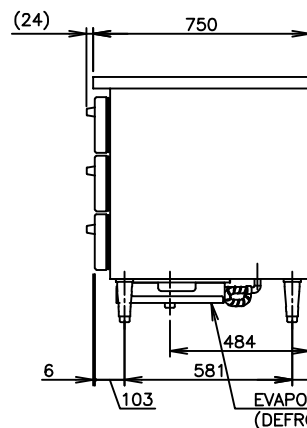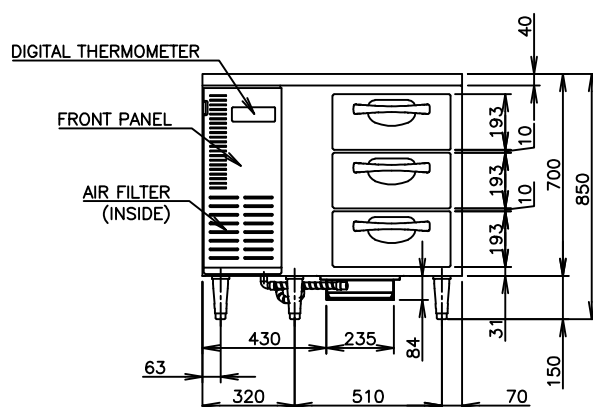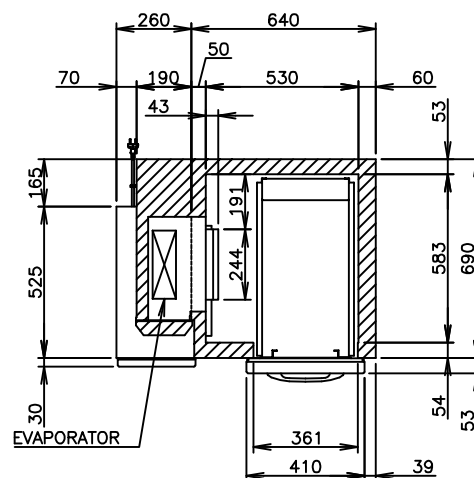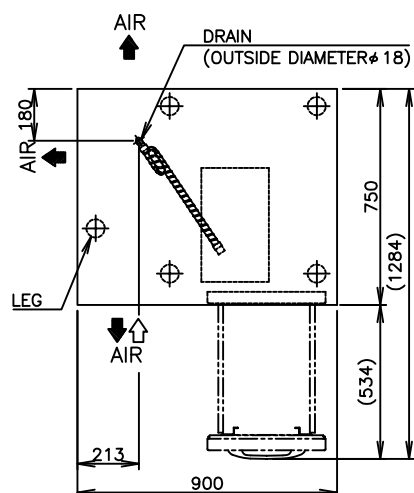

ITEM	Hoshizaki Drawer Type Undercounter Refrigerator
MODEL	RTC-90DDA-GN-3D
POWER SUPPLY	1 Phase 230~ 60Hz Capacity: 0.42kVA(1.91A)
AMPERAGE	Rated: 1.5A
ELECTRIC CONSUMPTION	Heater: 243W Defrost: 165W
HEAT REJECTION	*W
POWER CORD	2.3m (Plug with Earth Wire)
EFFECTIVE CAPACITY	176L
OUTSIDE DIMENSIONS	900mm(W) x 750mm(D) x 850mm(H) (-880)mm
INSIDE DIMENSIONS	530mm(W) x 583mm(D) x 588mm(H)
EXTERIOR	Stainless Steel, Galvanized Steel (Rear/Bottom)
INTERIOR	Stainless Steel, ABS Plastic
INSULATION	Polyurethane Foam
INSULATION FOAM BLOWING AGENT	Cyclopentane
REFRIGERATION SYSTEM	Forced Air Circulation
DEFROST SYSTEM	Glass Tube Heater
COMPRESSOR	-
CONDENSER	Fin and Tube type, Air-cooled
EVAPORATOR	Fin and Tube Type
REFRIGERANT	R134a/160g
TEMPERATURE CONTROL	Microprocessor (Digital Temp Indication) Adjustable from -6 to 12°C
DEFROST CONTROL	Microprocessor Controlled
ELECTRIC CIRCUIT PROTECTION	Fuse, Earth Wire
REFRIGERANT CIRCUIT PROTECTION	Motor Protector
LEG	Plastic Adjustable 150 - 180mm
WEIGHT	85kg (Gross Approx. *kg)
PACKAGE	Carton 965mm(W) x 830mm(D) x 790mm(H)
OPERATING CONDITIONS	Ambient Temperature: 5-38° C Voltage Range: Rated Voltage±6%

*We reserve the right to make changes in specifications and design without prior notice.

1. Install the product properly in accordance with the instructions on location, electrical connections stated in the instruction manual provided. Allow 10mm extra space at the installation site to meet any installation requirements (additional spacing is also required for proper air flow and pipe connections).
2. The heat rejection is based on the reached pulldown temperature at ambient temperature of 32° C and power supply of 230V 60Hz. The amperage and electric consumption are based on measurements at ambient temperature of 32° C and power supply of 230V 60Hz.
3. The cabinet temperature range of -6 to 12° C is guaranteed at ambient temperature of 35° C.
4. Product code: T012-D047