


POWER CORD 2800 LONG OUTSIDE

(PLUG WITH EARTH WIRE)


HOSHIZAKI






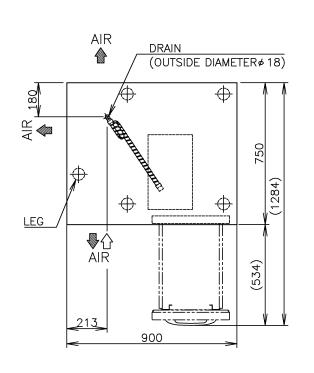

VIEW A (1/10)



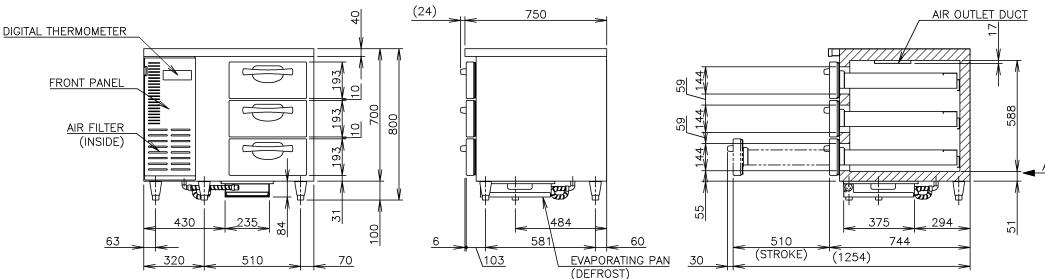

	ITEM	Hoshizaki Drawer Type Undercounter Freezer			
	MODEL	FTC-90DDA-GN-3D			
	POWER SUPPLY	1 Phase 220-240V 50Hz Capacity: 0.78kVA(3.6A)			
	AMPERAGE	Rated: 3.0A			
	ELECTRIC CONSUMPTION	Motor: *W(Power Factor: *%) Heater: 417W Refrigeration: 415W Defrost: 417W			
	HEAT REJECTION	*W			
	POWER CORD	2.8m (Plug with Earth Wire)			
	EFFECTIVE CAPACITY	176L			
	OUTSIDE DIMENSIONS	900mm(W) x 750mm(D) x 800mm(H) (790-830)mm			
	INSIDE DIMENSIONS	530mm(W) x 583mm(D) x 588mm(H)			
	EXTERIOR	Stainless Steel, Galvanized Steel (Rear/Bottom			
	INTERIOR	Stainless Steel, ABS Plastic			
	INSULATION	Polyurethane Foam			
	INSULATION FOAM BLOWING AGENT	Cyclopentane			
	REFRIGERATION SYSTEM	Forced Air Circulation			
	DEFROST SYSTEM	Glass Tube Heater			
	COMPRESSOR	Hermetic 315W			
	CONDENSER	Fin and Tube type, Air—cooled			
	EVAPORATOR	Fin and Tube Type			
	REFRIGERANT	R404A/200g			
2	TEMPERATURE CONTROL	Microprocessor (Digital Temp Indication) Adjustable from −25 to −7			
	DEFROST CONTROL	Microprocessor Controlled			
	ELECTRIC CIRCUIT PROTECTION	Fuse, Earth Wire			
	REFRIGERANT CIRCUIT PROTECTION	Motor Protector			
	LEG	Plastic Adjustable 90 — 130mm			
	WEIGHT	91kg (Gross Approx. *kg)			
	PACKAGE	Carton 965mm(W) x 830mm(D) x 790mm(H)			
	OPERATING CONDITIONS	Ambient Temperature: 5-43° C Voltage Range: Rated Voltage±6%			
l	We reserve the right to make changes in specifications and design without prior notice				

*We reserve the right to make changes in specifications and design without prior notice.

- 1. Install the product properly in accordance with the instructions on location, electrical connections stated in the instruction manual provided. Allow 10mm extra space at the installation site to meet any installation requirements (additional spacing is also required for proper air flow and pipe connections).
- 2. The heat rejection is based on the reached pulldown temperature at ambient temperature of 32° C and power supply of 220V 50Hz. The amperage and electric consumption are based on measurements at ambient temperature of 32° C and power supply of 220V 50Hz.
- 3. The cabinet temperature range of -25 to -7° C is guaranteed at ambient temperature of 30° C.

4. Product code: T018-C810

	HOSHI7AKI	DRAWFR TYP	F UNDFRCOUNTER	FRFF7FR	FTC-90DDA-	-GN-3
--	-----------	------------	----------------	---------	------------	-------

APPROV M.NOT		ECKED MASAKI	DESIGNED KAWAKAMI		awn HIKOORI	SCALE 1	/20	TRIGON	OMETRY
TORIHATA	KAWAKAMI	2	2016.07.28		DATE		DRAWING NO.		SYMBOL
APPROVED	DESIGNED	SYMBOL	DATE		2015	5.02.13	D15	491	[