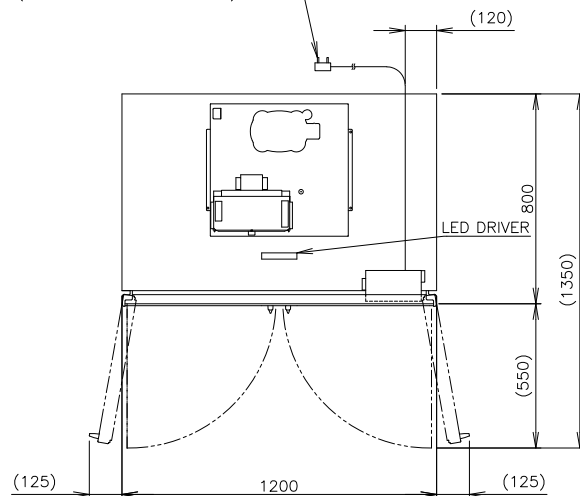

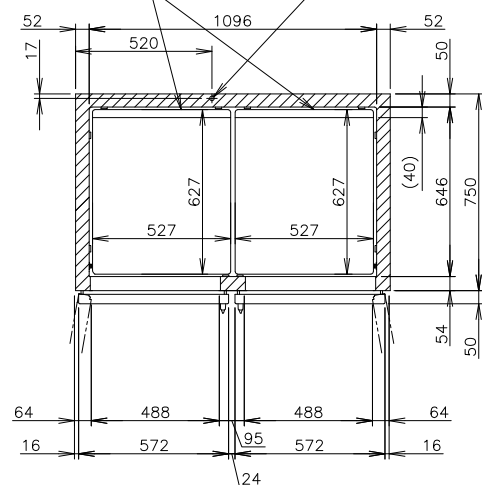



POWER CORD 2300 LONG OUTSIDE
(UK PLUG WITH EARTH WIRE)

COATING SHELF(527x627)



DRAIN OUTLET 18 OD
(DEFROST)

UK PLUG

DIGITAL THERMOMETER

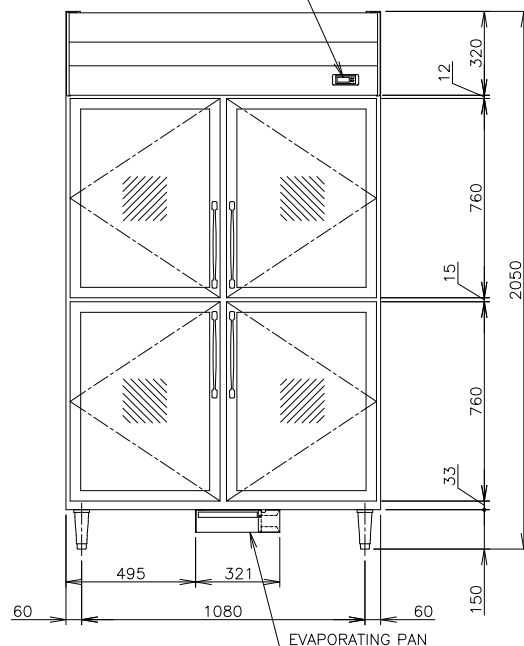

EVAPORATING PAN

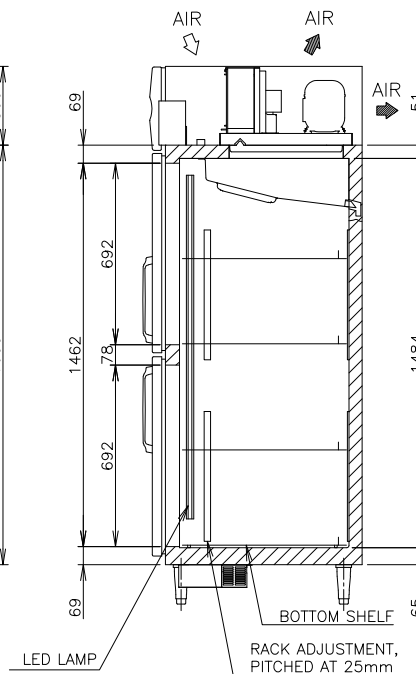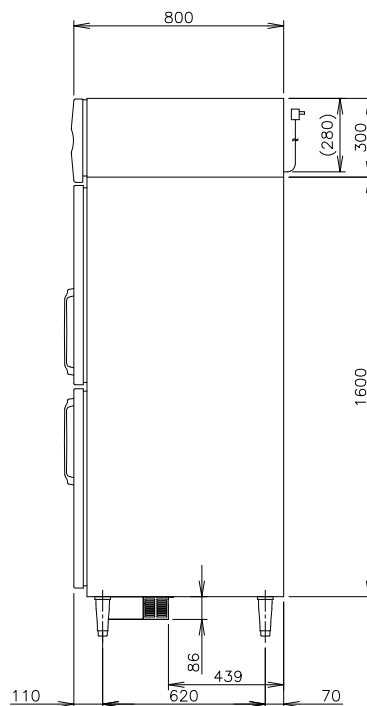

BOTTOM SHELF

LED LAMP

RACK ADJUSTMENT,
PITCHED AT 25mm

ITEM	Hoshizaki Reach-in Refrigerator
MODEL	HR-128MA-SG
POWER SUPPLY	1 Phase 230V 50Hz Capacity: 0.72kVA (3.3A)
AMPERAGE	Rated: 4.7A Starting: 12A
ELECTRIC CONSUMPTION	533W Heater: 283W Defrost: 250W
HEAT REJECTION	*W
POWER CORD	2.3m (UK Plug with Earth Wire)
EFFECTIVE CAPACITY	1110L
OUTSIDE DIMENSIONS	1200mm(W) x 800mm(D) x 2050(-2080)mm(H)
INSIDE DIMENSIONS	1096mm(W) x 646mm(D) x 1484mm(H)
EXTERIOR	Stainless Steel, Galvanized Steel(Top, Rear, Bottom) Double Layer Glass with Heat Reflection Film(Glass Door)
INTERIOR	Stainless Steel
INSULATION	Polyurethane Foam
INSULATION FOAM BLOWING AGENT	Cyclopentane
REFRIGERATION SYSTEM	Forced Air Circulation
DEFROST SYSTEM	Heater
COMPRESSOR	Hermetic
CONDENSER	Wire and Tube type, Air-cooled
EVAPORATOR	Fin and Tube type
REFRIGERANT	R134a
TEMPERATURE CONTROL	Microprocessor (Digital Temp. Indication) Adjustable from -2 to 12°C
DEFROST CONTROL	Microprocessor
ELECTRIC CIRCUIT PROTECTION	Earth Wire, Circuit Breaker
REFRIGERANT CIRCUIT PROTECTION	Motor Protector (Auto-reset)
LEG	Plastic Adjustable from 150 to 180mm
SHELF	8 pcs.
WEIGHT	156kg (Gross 188kg)
PACKAGE	Carton (Wooden Pallet) 1260mm(W) x 900mm(D) x 2075mm(H)
ACCESSORIES	Drain Hose x 1, Drain Pan x 1
OPERATING CONDITIONS	Ambient Temperature: 5 - 38°C Voltage Range: Rated Voltage ±6%

*We reserve the right to make changes in specifications and design without prior notice.

1. Install the product properly in accordance with the instructions on location, water supply/drain connections and electrical connections stated in the instruction and installation manuals provided.
Allow 10mm extra space at the installation site to meet any installation requirements (additional spacing is also required for proper air flow and pipe connections).
2. The heat rejection is based on the reached pulldown temperature at ambient temperature of 38°C.
3. Product Code: R591-W026 (HS)

HOSHIZAKI REACH-IN REFRIGERATOR HR-128MA-SG

APPROVED TORIHATA	CHECKED LIU	DESIGNED ZHOU	DRAWN ZHOU	SCALE 1/20	TRIGONOMETRY
* APPROVED	* DESIGNED	* SYMBOL	* DATE	DATE 2023.11.30	DRAWING NO. D37481
					SYMBOL △