
HOSHIZAKI

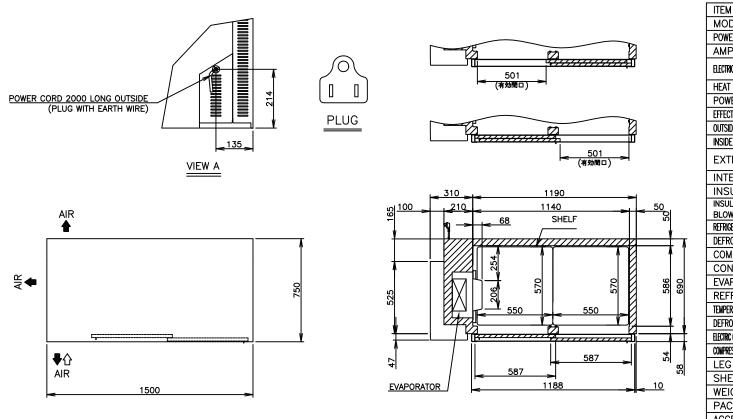

ITEM	Hoshizaki Undercounter Refrigerator				
MODEL	RT-158MA-PSG				
POWER SUPPLY	1 Phase 220-240V 60Hz Capacity: 0.5kVA (2.5A)				
AMPERAGE	Rated **A				
ELECTRIC CONSUMPTION	Heater 249W				
	Defrost 165W *W				
HEAT REJECTION					
POWER CORD	2.0m (UK Plug with Earth Wire)				
EFFECTIVE CAPACITY	420L				
OUTSIDE DIMENSIONS	1500mm (W) x 750mm (D) x 850(-880) mm (H)				
INSIDE DIMENSIONS	1140mm (W) x 586mm (D) x 599mm (H)				
EXTERIOR	Stainless Steel, Galvanized Steel (Rear/Bottom) Double Layer Glass with Heat Reflection Film(Glass Door)				
INTERIOR	Stainless Steel				
INSULATION	Polyurethane Foam				
INSULATION FOAM BLOWING AGENT	Cyclopentane				
REFRIGERATION SYSTEM	Forced Air Circulation				
DEFROST SYSTEM	Glass Tube Heater				
COMPRESSOR	Hermetic				
CONDENSER	Wire and Tube type, Air—cooled				
EVAPORATOR	Fin and Tube Type				
REFRIGERANT	R134a				
TEMPERATURE CONTROL	Microprocessor (Digital Temp Indication) Adjustable from -2 to 12°C				
DEFROST CONTROL	Microprocessor controlled				
ELECTRIC CIRCUIT PROTECTION	Fuse, Earth Wire				
COMPRESSOR PROTECTION	Motor Protector				
LEG	Plastic Adjustable 150 to 180mm				
SHELF	4pcs.				
WEIGHT	Net: 105kg (Gross: Approx. 110kg)				
PACKAGE	Carton 1565mm (W) x 830mm (D) x 790mm (H)				
ACCESSORIES	Drain Hose x 1,Drain Pan x 1				
OPERATING CONDITIONS	Ambient Temperature: 5-38° Voltage Range: Rated Voltage±6%				

*We reserve the right to make changes in specifications and design without prior notice.

- Install the product properly in accordance with the instructions on location, electrical connections stated in the instruction manual provided.
 Allow 10mm extra space at the installation site to meet any installation requirements(additional spacing is also required for proper air flow and pipe connections).
- 2. The amperage and electric consumption are based on measurements at ambient temperature of 32° and power supply of 230V 60Hz.
- The cabinet temperature range of −2 to 12℃is guaranteed at ambient temperature of 32℃.
- Depending on the installation environment, the glass door and the front frame of the body may dew and drop.
- 5. Product code: T269-D301 (HPH)(Unreleased)
- 6. During the operation of the machine,dew will form on the surface of the glass door.

	on measurements a and power supply of
	3. The cabinet tempera quaranteed at ambi
	4. Depending on the in the glass door and
י וטו	may dew and drop. 5. Product code: T269-
<u>Pating Pan</u> ST)	6. During the operation on the surface of th *CUSTOMIZED SLIDE GLASS DOOR LED LAMP
I ADDDOVED I CI	JECKED DESIGNED DDAWN C

DIGITAL THERMOMETER	\			*	ř v
FRONT PANEL			"	613	7000
	432	235		70 **	150

(9)	750	AIR OUTLET DUC	<u>)T</u>
<u>→</u>	108 581	60 375 EVAPORATING RAN	, A .
		EVAPORATING PAN (DEFROST)	1

LED LAMP

HOSHIZAKI UNDERCOUNTER REFRIGERATOR RT—158MA—PSG

LED LAMP										
	PROVED LIANG		ecked Iang			awn 10U	SCALE 1	/20	TRIGONOMETRY	
			D			DATE		DRAWING N		SYMBOL
PROVED	DESIG	NFD	SYMBOL	DATE		2024	4.08.03	D****	•	/-\

DIGITAL THERMOMETER