



HOSHIZAKI










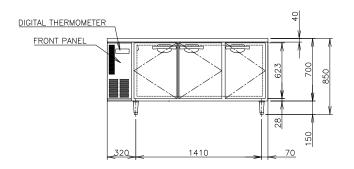



ITEM	Hoshizaki Undercounter Freezer						
MODEL	FT-186MA-P-ML						
POWER SUPPLY	1 Phase 230V 60Hz Capacity: 0.65kVA (2.98A)						
AMPERAGE	Rated **A						
ELECTRIC CONSUMPTION	Heater 392W Defrost 330W						
HEAT REJECTION	*W						
POWER CORD	2.0m (Plug with Earth Wire)						
EFFECTIVE CAPACITY	401L						
OUTSIDE DIMENSIONS	1800mm (W) x 600mm (D) x 850(-880)mm (H)						
INSIDE DIMENSIONS	1440mm (W) x 436mm (D) x 599mm (H						
EXTERIOR	Stainless Steel, Galvanized Steel (Rear / Bottom) ABS Plastic (Top & Bottom on Door)						
INTERIOR	Stainless Steel, ABS Plastic (Door)						
INSULATION	Polyurethane Foam						
INSULATION FOAM BLOWING AGENT	Cyclopentane						
REFRIGERATION SYSTEM	Forced Air Circulation						
DEFROST SYSTEM	Glass Tube Heater						
COMPRESSOR	Hermetic						
CONDENSER	Fin and Tube type, Air—cooled						
EVAPORATOR	Fin and Tube Type						
REFRIGERANT	R404A						
TEMPERATURE CONTROL	Microprocessor controlled Adjustable from -23 to -7 °C						
DEFROST CONTROL	Microprocessor controlled						
ELECTRIC CIRCUIT PROTECTION	Fuse, Earth Wire						
COMPRESSOR PROTECTION	Motor Protector						
LEG	Plastic Adjustable 150 to 180mm						
SHELF	6pcs.						
WEIGHT	Net: 93kg (Gross: Approx. 98kg)						
PACKAGE	Carton 1865mm (W) x 680mm (D) x 790mm (H						
ACCESSORIES	_						
OPERATING CONDITIONS	Ambient Temperature: 5–38°C Voltage Range: Rated Voltage±6% make changes in specifications and design without prior notice						

- 1. Install the product properly in accordance with the instructions on location, electrical connections stated in the instruction manual provided. Allow 10mm extra space at the installation site to meet any installation requirements (additional spacing is also required for proper air flow and pipe connections).
- 2. The heat rejection is based on the reached pulldown temperature at ambient temperature of 35℃ and power supply of 230V 60Hz. The amperage and electric consumption are based on measurements at ambient temperature of 38°C and power supply of 230V 60Hz.
- 3. The cabinet temperature range of -23 to -7° is guaranteed at ambient temperature of 30°C.
 4. Product code: T274-C310 (HPH) Unreleased

APPROVED LIANG			ecked ANG	DESIGNED ZHOU	DRAWN ZHOU		SCALE 1	/30	TRIGON	METRY
**	,	*	Α	****		DATE		DRAWING NO		SYMB0L/
APPROVED	D DESIGNED SYMBOL DATE			2024.11.01		D****		<u>/-</u> \		