
## **HOSHIZAKI**

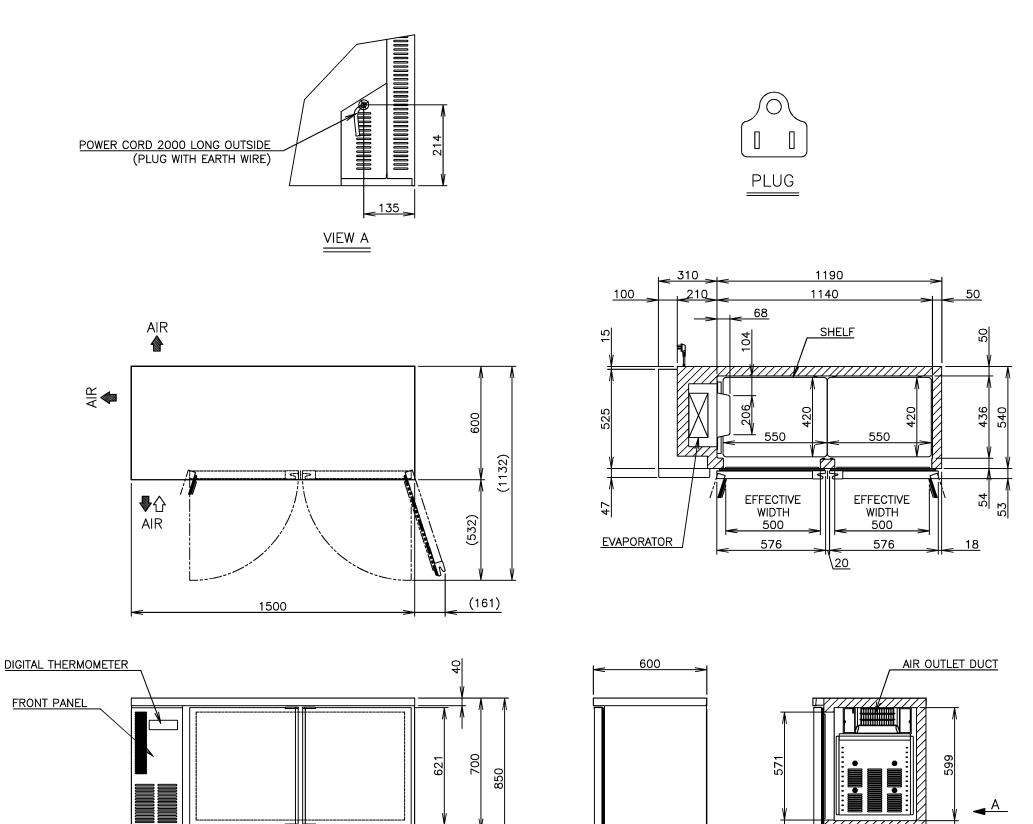

ITEM	Hoshizaki Undercounter Refrigerator								
MODEL	RT-156MA-P								
POWER SUPPLY	1 Phase 230V 60Hz Capacity: 0.5kVA (2.5A)								
AMPERAGE	Rated 2.0A								
ELECTRIC CONSUMPTION	Motor 260W Heater 189W Refrigeration 245W Defrost 189W								
HEAT REJECTION	*W								
POWER CORD	2.0m (Plug with Earth Wire)								
EFFECTIVE CAPACITY	318L								
OUTSIDE DIMENSIONS	1500mm (W) x 600mm (D) x 850(-880) mm (H)								
INSIDE DIMENSIONS	1140mm (W) x 436mm (D) x 599mm (H)								
EXTERIOR	Stainless Steel, Galvanized Steel (Rear/Bottom) ABS Plastic (Top & Bottom on Door)								
INTERIOR	Stainless Steel, ABS Plastic (Door)								
INSULATION	Polyurethane Foam								
INSULATION FOAM BLOWING AGENT	I (`Volonontano								
REFRIGERATION SYSTEM	Forced Air Circulation								
DEFROST SYSTEM	Glass Tube Heater								
COMPRESSOR	Hermetic								
CONDENSER	Wire and Tube type, Air—cooled								
EVAPORATOR	Fin and Tube Type								
REFRIGERANT	R134a								
TEMPERATURE CONTROL	L Microprocessor (Digital Temp Indication) Adjustable from −6 to								
DEFROST CONTROL	Microprocessor controlled								
ELECTRIC CIRCUIT PROTECTION	Fuse, Earth Wire								
COMPRESSOR PROTECTION	Motor Protector								
LEG	Plastic Adjustable 150 to 180mm								
SHELF	4pcs.								
WEIGHT	Net: 81kg (Gross: Approx. 86kg)								
PACKAGE	Carton 1565mm (W) x 680mm (D) x 790mm (H)								
ACCESSORIES	_								
OPERATING CONDITIONS	Ambient Temperature: 5—43°C Voltage Range: Rated Voltage±6%								
We reserve the right to	We reserve the right to make changes in specifications and design without prior notice.								

- Install the product properly in accordance with the instructions on location, electrical connections stated in the instruction manual provided. Allow 10mm extra space at the installation site to
- Allow 10mm extra space at the installation site to meet any installation requirements (additional spacing is also required for proper air flow and pipe connections).

  2. The heat rejection is based on the reached pulldown temperature at ambient temperature of 38°C and power supply of 230V 50Hz. The amperage and electric consumption are based on measurements at ambient temperature of 38°C and power supply of 230V 50Hz.

  3. The cabinet temperature range of -6 to 12°C is guaranteed at ambient temperature of 35°C.

  4. Product code: T265-C300 (HPH)

105

29

1110

70

APPROV KAWAKA		HECKED WANG	DESIGNED LIANG	DRAWN SHAN		scale 1/20		TRIGONOMETRY	
##	#	Α	****		DATE		DRAWING NO.		SYMBOL
APPROVED	DESIGNED	SYMBOL	DATE		2019	9.06.20	D25	<i>ა</i> გვ	