



HOSHIZAKI




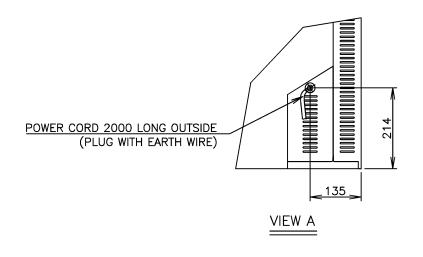






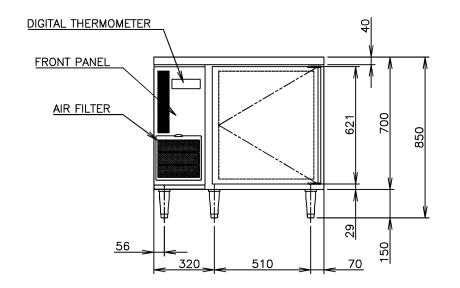





2.0m (Plug with Earth Wire) 199L					
<i>()</i>					
(H)					
n (H)					
tom)					
Cyclopentane					
-7°C					
m					
m (H)					
Voltage Range:Rated Voltage±6% o make changes in specifications and design without prior notice.					

- 1. Install the product properly in accordance with the instructions on location, electrical connections stated in the instruction manual provided. Allow 10mm extra space at the installation site to
- Allow 10mm extra space at the installation site to meet any installation requirements (additional spacing is also required for proper air flow and pipe connections).

 2. The heat rejection is based on the reached pulldown temperature at ambient temperature of 35°C and power supply of 230V 50Hz.

 The amperage and electric consumption are based on measurements at ambient temperature of 38°C and power supply of 230V 50Hz.
- and power supply of 230V 50Hz.

 3. The cabinet temperature range of -23 to -7°C is guaranteed at ambient temperature of 35°C.

 4. Product code: T275-C300 (HPH)

APPROV KAWAKA			ECKED 'ANG	DESIGNED LIANG		AWN SCALE 1		/20	TRIGONOMETRY	
**	*1		Α	****		DATE		DRAWING NO.		SYMBOL
APPROVED	ROVED DESIGNED SYMBOL DATE			2018.06.20		I D25237				