
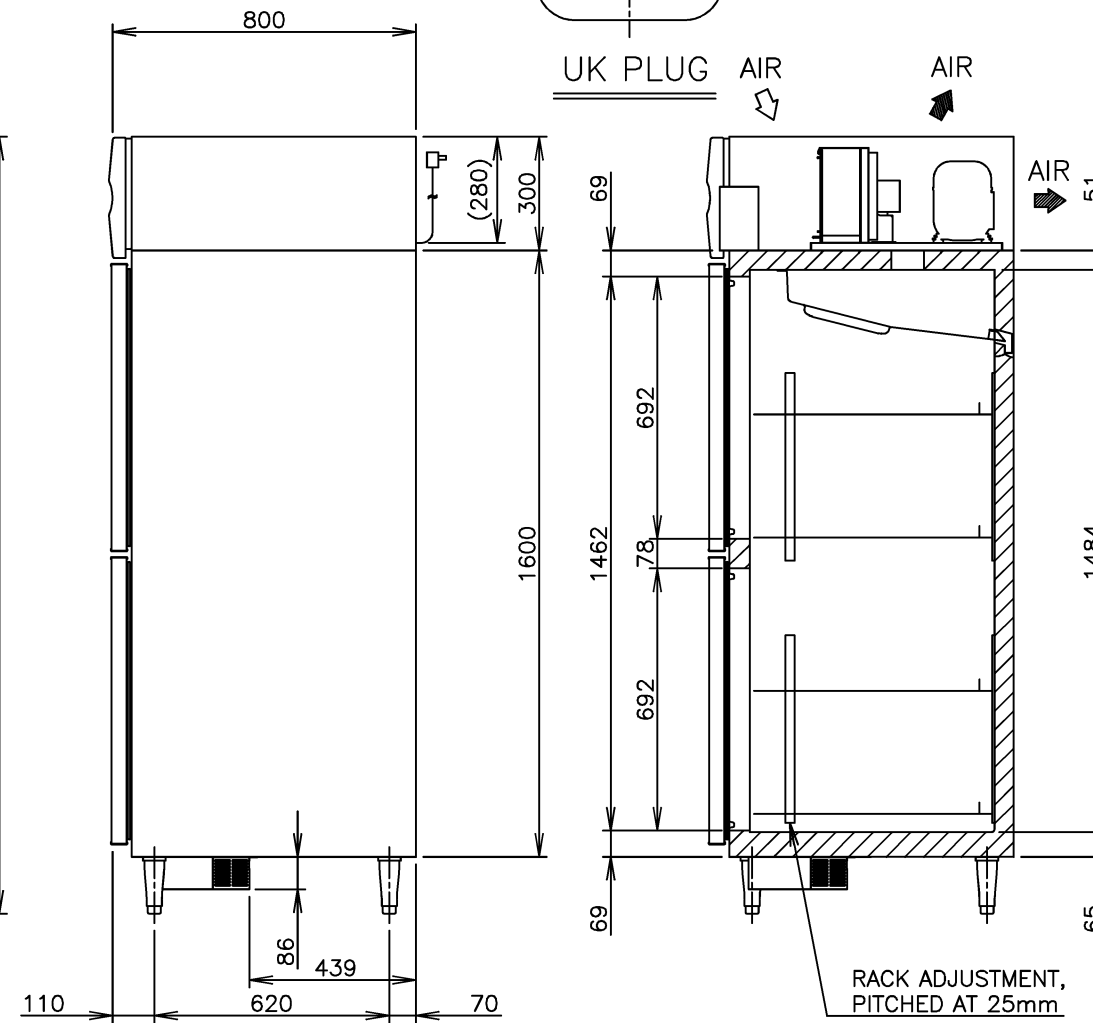
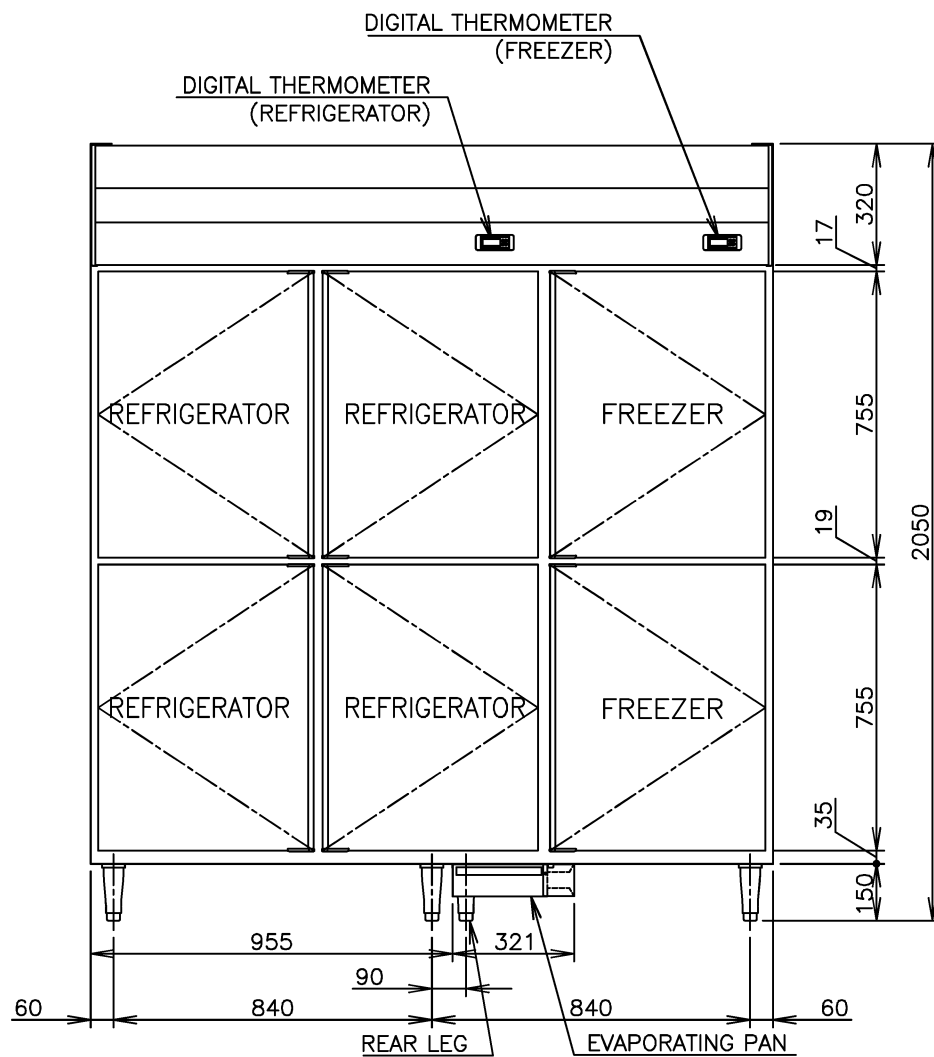
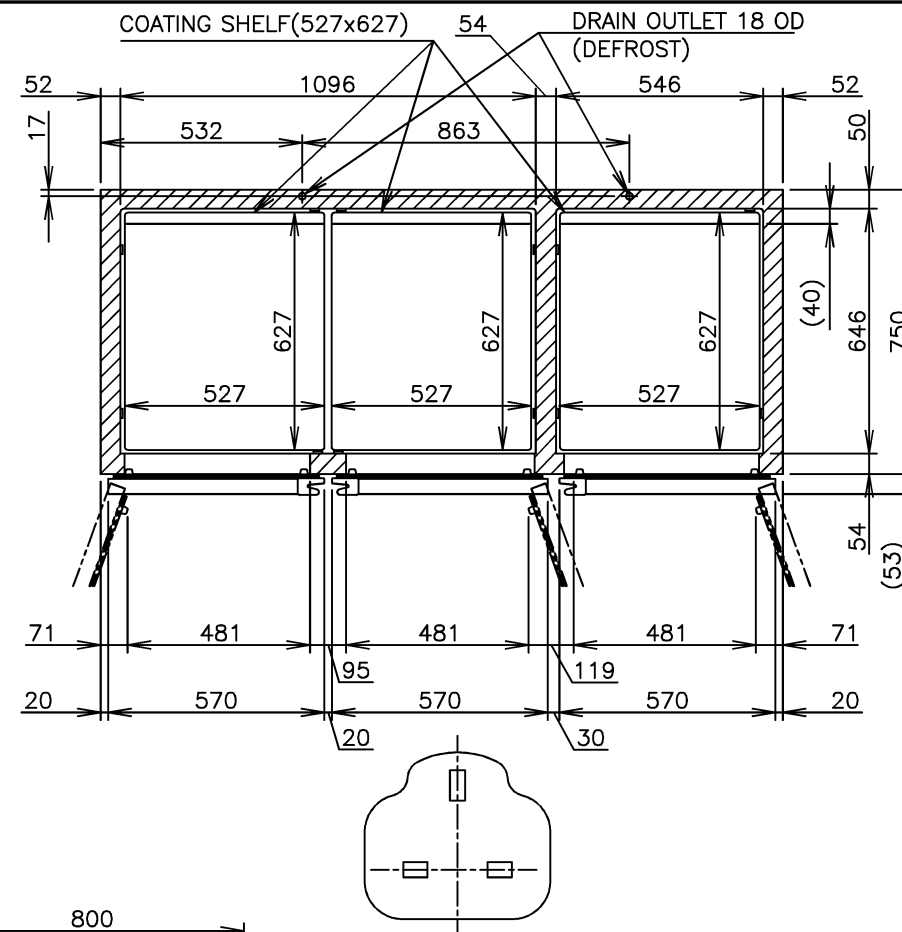


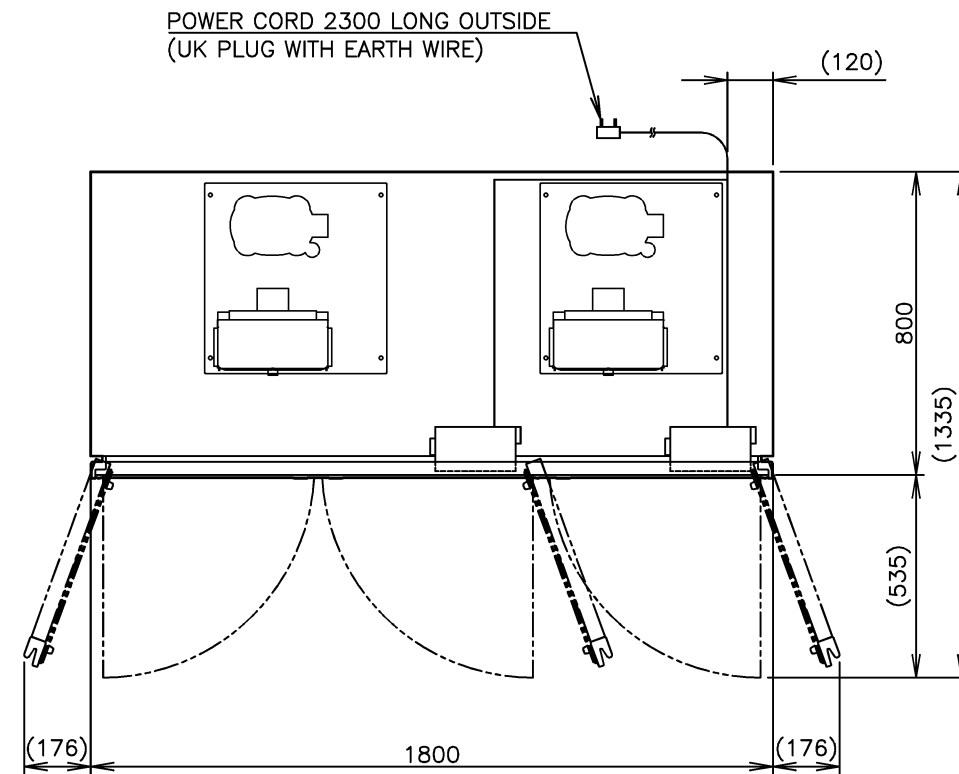

ITEM	Hoshizaki Reach-in Freezer/Refrigerator		
MODEL	HRF-188MA-S		
POWER SUPPLY	1 Phase 230V 50Hz Capacity: 0.56kVA (2.53A)		
AMPERAGE	Rated: 8.2A Starting: 8.5A		
ELECTRIC CONSUMPTION	844W Heater: 752W Defrost: 752W		
HEAT REJECTION	*W		
POWER CORD	2.3m (UK Plug with Earth Wire)		
EFFECTIVE CAPACITY	Total 1452L (Refrigerator: 980L, Freezer: 472L)		
OUTSIDE DIMENSIONS	1800mm(W)×800mm(D)×1990(-2020)mm(H)		
INSIDE DIMENSIONS	Refrigerator	1096mm(W)×646mm(D)×1484mm(H)	
	Freezer	546mm(W)×646mm(D)×1484mm(H)	
EXTERIOR	Stainless Steel, Galvanized Steel(Top, Rear, Bottom)		
INTERIOR	Stainless Steel, ABS Plastic(Door)		
INSULATION	Polyurethane Foam		
INSULATION FOAM BLOWING AGENT	Cyclopentane		
REFRIGERATION SYSTEM	Forced Air Circulation		
DEFROST SYSTEM	Refrigerator	Off Cycle	
	Freezer	Heater	
COMPRESSOR	Refrigerator	Hermetic	
	Freezer	Hermetic	
CONDENSER	Refrigerator	Wire and Tube Type, Air-cooled	
	Freezer	Wire and Tube Type, Air-cooled	
EVAPORATOR	Refrigerator	Fin and Tube type	
	Freezer	Fin and Tube type	
REFRIGERANT	Refrigerator	R134a	
	Freezer	R404A	
TEMPERATURE CONTROL	Refrigerator	Microprocessor Controlled (Digital Temperature Indication) Adjustable from -6 to 12°C	
	Freezer	Microprocessor Controlled (Digital Temperature Indication) Adjustable from -23 to -7°C	
DEFROST CONTROL	Microprocessor		
ELECTRIC CIRCUIT PROTECTION	Earth Wire, Circuit Breaker		
REFRIGERANT CIRCUIT PROTECTION	Motor Protector (Auto-reset)		
LEG	Plastic Adjustable from 150 to 180mm		
SHELF	12 pcs.		
WEIGHT	220kg (Gross 262kg)		
PACKAGE	Carton (Wooden Pallet) 1860mm(W)×900mm(D)×2075mm(H)		
ACCESSORIES	Drain Hose×2		
OPERATING CONDITIONS	Ambient Temperature: 5 - 43°C		
	Voltage Range: Rated Voltage ±6%		

*We reserve the right to make changes in specifications and design without prior notice.

1. Install the product properly in accordance with the instructions on location, water supply/drain connections and electrical connections stated in the instruction and installation manuals provided.
Allow 10mm extra space at the installation site to meet any installation requirements (additional spacing is also required for proper air flow and pipe connections).
2. The heat rejection is based on the reached pulldown temperature at ambient temperature of 35°C.
3. Product Code: R601–C100 (HS)