
HOSHIZAKI

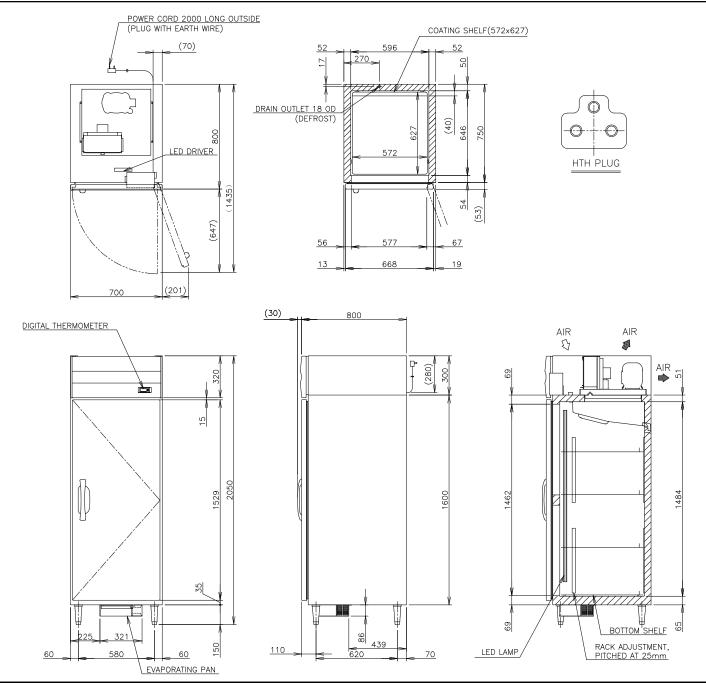

ITEM	Hoshizaki Reach—in Refrigerator				
MODEL	HF-78MA-S				
POWER SUPPLY	1 Phase 230V 50Hz				
AMPERAGE	Rated: 4.6A Starting: 8.5A				
ELECTRIC CONSUMPTION	Heater: 426W Defrost: 250W				
HEAT REJECTION	*W				
POWER CORD	2.0m (Plug with Earth Wire)				
EFFECTIVE CAPACITY	569L				
OUTSIDE DIMENSIONS	700mm(W)x800mm(D)x2050(-2080)mm(H) 596mm(W)x646mm(D)x1484mm(H)				
INSIDE DIMENSIONS					
EXTERIOR	Stainless Steel, Galvanized Steel(Top, Rear, Bottom)				
INTERIOR	Stainless Steel, Stainless Pack(Door)				
INSULATION	Polyurethane Foam				
INSULATION FOAM BLOWING AGENT	Cyclopentane				
REFRIGERATION SYSTEM	Forced Air Circulation				
DEFROST SYSTEM	Heater				
COMPRESSOR	Hermetic				
CONDENSER	Wire and Tube type, Air—cooled				
EVAPORATOR	Fin and Tube type				
REFRIGERANT	R404A				
TEMPERATURE CONTROL	Microprocessor (Digital Temp. Indication) Adjustable from -23 to -70				
DEFROST CONTROL	Microprocessor				
ELECTRIC CIRCUIT PROTECTION	Earth Wire, Circuit Breaker				
REFRIGERANT CIRCUIT PROTECTION	Motor Protector (Auto-reset)				
LEG	Plastic. Adjustable from 150 to 180mm				
SHELF 4 pcs.					
WEIGHT	109kg (Gross 131kg)				
PACKAGE	Carton (Wooden Pallet) 760mm(W)x 900mm(D)x 2075mm(H)				
ACCESSORIES					
OPERATING CONDITIONS	Ambient Temperature: 5 - 43° C Voltage Range: Rated Voltage ±6%				
	o make changes in specifications and design without prior notice.				
I install the r	product properly in accordance				

1. Install the product properly in accordance with the instructions on location, water supply/drain connections and electrical connections stated in the instruction and installation manuals provided.

Allow 10mm extra space at the installation site to meet any installation requirements (additional spacing is also required for proper air flow and pipe connections).

- The heat rejection is based on the reached pulldown temperature at ambient temperature of 35° C
- 3. Product Code: R594-W* (HTH)

HOSHIZAKI REACH-IN FREEZER HF-78MA-S

APPROV LIAN		CHECKED LIU	DESIGNED JIA	DRAWN JIA	SCALE 1	/20	TRIGON	OMETRY
*	*	A	****	DATE	0.4.4.0	DRAWING NO.		SYMBOL
APPROVED	DESIGNE	ED SYMBOL	DATE	20:	24.4.2	D****		