





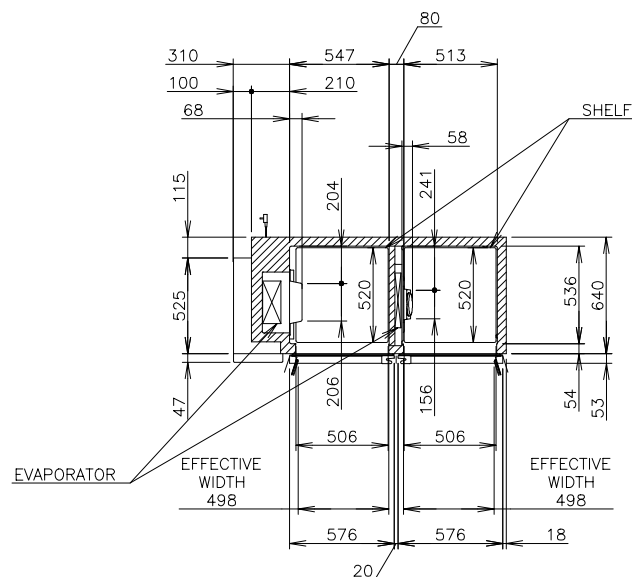

ITEM	Hoshizaki Undercounter Freezer/Refrigerator
MODEL	RFT-157MA-P
POWER SUPPLY	1 Phase 230V 60Hz
AMPERAGE	Rated *A
ELECTRIC CONSUMPTION	*W Defrost 495W Heater 540W
POWER CORD	2.0m (Plug with Earth Wire)
EFFECTIVE CAPACITY	Total 367L (Refrigerator:180L Freezer:187L)
OUTSIDE DIMENSIONS	1500mm (W) x 700mm (D) x 850(-880) mm (H)
INSIDE DIMENSIONS	Refrigerator 513mm (W) x 536mm (D) x 599mm (H) Freezer 547mm (W) x 536mm (D) x 599mm (H)
EXTERIOR	Stainless Steel, Galvanized Steel (Rear/Bottom) ABS Plastic (Top & Bottom on Door)
INTERIOR	Stainless Steel, ABS Plastic (Door)
INSULATION	Polyurethane Foam
INSULATION FOAM BLOWING AGENT	Cyclopentane
REFRIGERATION SYSTEM	Forced Air Circulation
DEFROST SYSTEM	Glass Tube Heater
COMPRESSOR	Hermetic
CONDENSER	Fin and Tube type, Air-cooled
EVAPORATOR	Fin and Tube Type
REFRIGERANT	R404A
TEMPERATURE CONTROL	Microprocessor (Digital Temp Indication) Adjustable from Refrigerator -3 to 12℃ Freezer -25 to -7℃
DEFROST CONTROL	Microprocessor controlled
ELECTRIC CIRCUIT PROTECTION	Fuse, Earth Wire
COMPRESSOR PROTECTION	Motor Protector
LEG	Plastic Adjustable 150 to 180mm
SHELF	4pcs.
WEIGHT	Net: 94kg (Gross: Approx. 116kg)
PACKAGE	Carton 1565mm (W) x 780mm (D) x 790mm (H)
ACCESSORIES	EVAPORATING PAN KIT
OPERATING CONDITIONS	Ambient Temperature: 5-38℃ Voltage Range: Rated Voltage±6%

2. Product code: T397-C300(unreleased)

APPROVED LIANGK	CHECKED LIANGK	DESIGNED ZHANGY	DRAWN ZHANGY	SCALE 1/30	TRIGONOMETRY		
*	*	*	DATE 2024.11.29	DRAWING NO. *		SYMBOL 	