



Dispensing
capacity per day*

65_L

AUTOMATIC DRAFT BEER DISPENSER

User friendly for customer, staff and owner
through one-touch operation

DBF-AS65WE-T



* Dispensing capacity per day: Draft beer cooled to less than 8°C from 30°C can be dispensed in a total of four hours.



OWNER

**Stylish round form can be
suitable for shop interior**

Compact and easy cleaning design.

The side panel made of resin and the round design
can be suitable for the atmosphere of a shop.



CUSTOMER

**Self-operation by customer
LED dispensing button
is easy-to-see**

When self-operating, only
two buttons can be used by
customer. Simple and easy
to use for customer. The
other buttons for staff are
covered.



**Rear color on the customer side
suits the atmosphere of a shop**



Considering the situation
where the rear can be
seen from customer, the
rear panel is made of the
same dark gray as the
front so as to suit the
atmosphere of a shop.

HOSHIZAKI

Hoshizaki auto draft beer dispenser is user friendly for everyone with many functions.

Simple and easy to use



STAFF

Well-managed



OWNER

FOR STAFF

Well-operability


Easy to switch to manual dispensing

Just lift up the operation panel unit for switching to manual dispensing.



Compatible with various mugs

You can set two types mugs in advance and easy to switch them by one-touch operation.



Sold out sensor built-in

When beer keg becomes empty, the unit automatically stops the dispensing operation. Then sold out lamp lights up.

Well-cleanability

Easy cleaning of drain pan

Devised drain pan making it lighter and easy-cleaning



FOR OWNER

Well-maintained management



See current status at a glance


The digital display makes it easy to see the status of the device.

Error code / history display

The error code can be displayed and making it smooth maintenance.

Dispense two different types of beer

Two types of beer can be dispensed from one machine by two independent beer circuit systems.

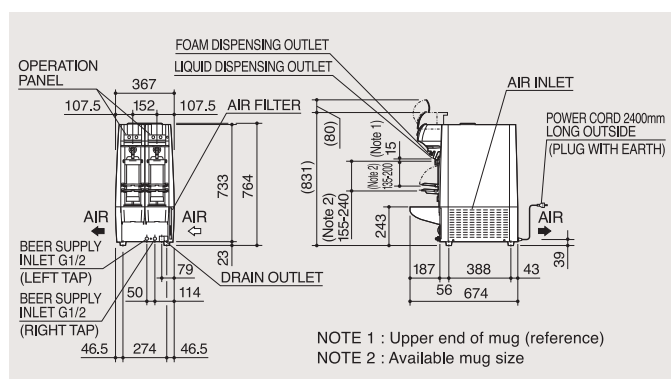

HOSHIZAKI AUTOMATIC DRAFT BEER DISPENSER DBF-AS65WE-T

POWER SUPPLY	1 Phase 220-240V 50/60Hz Capacity : 0.52kVA (2.4A)
AMPERAGE	Running : 1.6A/1.7A Rated Monitor : 1.6A/1.7A Starting : 5.4A/5.7A
ELECTRIC CONSUMPTION	Rated Monitor : 285/345W (Power Factor 80/92%)
DISPENSING CAPACITY	65L (30°C->8°C/4h)
REFRIGERATION SYSTEM	Instant cooling System (Ice Storage System)
DISPENSING OUTLET	Automatic Dispensing Tap with Foaming Mechanism
OUTSIDE DIMENSIONS	367mm(W)×674mm(D)×764mm(H)
NET WEIGHT	50kg
INSTALLATION SPACE	520mm(W)×750mm(D)
OPERATING CONDITIONS	Ambient Temperature : 5-32°C Voltage Range : Rated Voltage ±6%