

CERTIFICATION




# ICE MATE

by  **HOSHIZAKI**

## SRM-105A ICE MAKER

**DICE**



ICEMATE is committed to bringing high-efficiency / energy-saving, and high quality ice-making product to people who have dreams and desire to create their own business with the best scientific technology and manufacturing technology.

### KEY FEATURES

#### SAFETY AND HYGIENE ASSURED ICE MACHINE



NSF Certified Material  
for Bin and Scoop



Detachable Parts for  
Easy Cleaning



Air Filter Prevent Dust  
from Entering



Stainless Steel

#### ENERGY & WATER SAVING, QUIET OPERATION



Energy & Water Saving,  
Quiet Operation


#### EASY MAINTENANCE




IoT




## DIMENSIONS

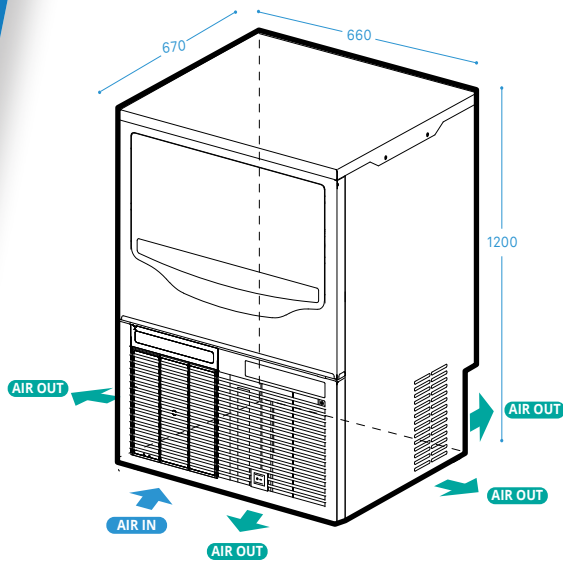


TOP SIDE

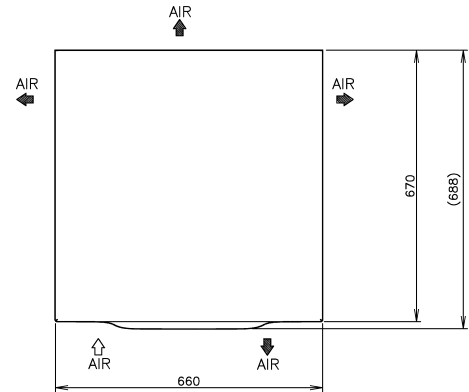


FRONT SIDE

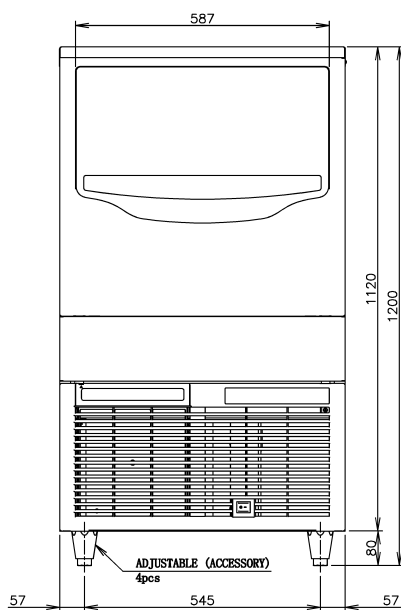

RIGHT SIDE

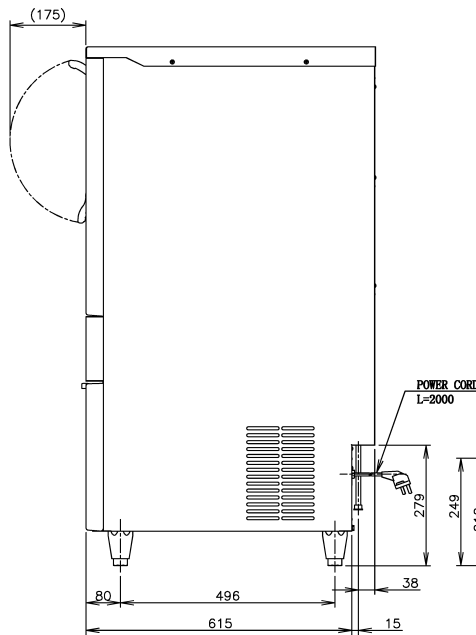

BACK SIDE

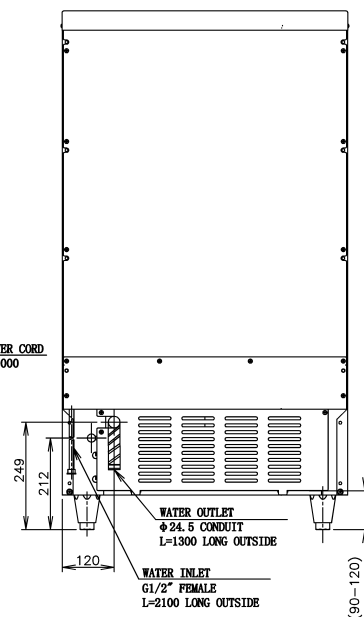

## SPECIFICATIONS

|                                |                                                                                                        |                                  |                                                    |
|--------------------------------|--------------------------------------------------------------------------------------------------------|----------------------------------|----------------------------------------------------|
| Ice Dimensions (W x D x H)     | 22 x 22 x 22 mm                                                                                        | Water Consumption per 24H        | (AT32°C/WT21°C) 0.14m <sup>3</sup> (2.0L / kg Ice) |
| Outside Dimensions (W x D x H) | 660 x 670 x 1200 mm                                                                                    | Ice Production Freeze Cycle Time | (AT21°C/WT15°C) 20 min                             |
| Package Dimensions (W x D x H) | Carton: 785 x 860 x 1250 mm                                                                            | Ice Production per Cycle         | (AT21°C/WT15°C) Approx. 1.17kg / 126 pcs           |
| Weight (Net / Gross)           | 61 kg / 69 kg                                                                                          | <b>OPERATING CONDITIONS</b>      |                                                    |
| Amperage / Starting Amperage   | 3.2A / 15.0A                                                                                           | Voltage Range                    | 198 - 254 V                                        |
| Electrical Consumption         | (AT32°C / WT21°C) 480 W                                                                                | Ambient Temperature              | 5 - 38°C                                           |
| Refrigerant Charge             | R404A / 290g                                                                                           | Water Supply                     | 5 - 32°C                                           |
| Ice Storage Capacity           | Maximum 43.6kg                                                                                         | Water Supply Pressure            | 0.07 - 0.55 Mpa (0.7 - 5.5 bar)                    |
| Ice Production per 24H         | (AT10°C / WT10°C) Approx. 100 kg<br>(AT21°C / WT15°C) Approx. 90 kg<br>(AT32°C / WT21°C) Approx. 70 kg | Supply Voltage                   | 1/220 - 240V / 50Hz                                |



**HOSHIZAKI**

PT. HOSHIZAKI INDONESIA