

CERTIFICATION




ICE MATE

by  **HOSHIZAKI**

SRM-200AB -B-301SA ICE MAKER

DICE



ICEMATE is committed to bringing high-efficiency / energy-saving, and high quality ice-making product to people who have dreams and desire to create their own business with the best scientific technology and manufacturing technology.

KEY FEATURES

SAFETY AND HYGIENE ASSURED ICE MACHINE

AUTO-CLEANING



Timely maintenance of water system can extend life of equipment.

PURE ICE



Overflow self-cleaning function, ensuring ice hygiene

IoT



Slow melt Dilution




Slow Dilution
Slower melting speed due to -7°C of inside temp of ice cube

Powerful Ice Making




Energy & Water Saving, Quiet Operation




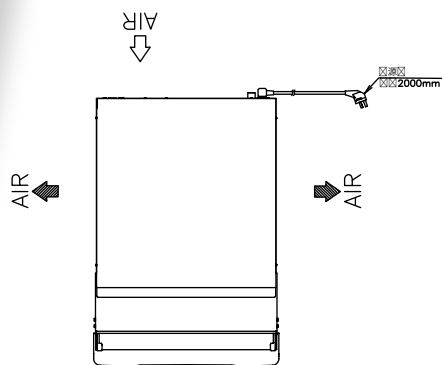


BIN TOP VIEW




RIGHT SIDE

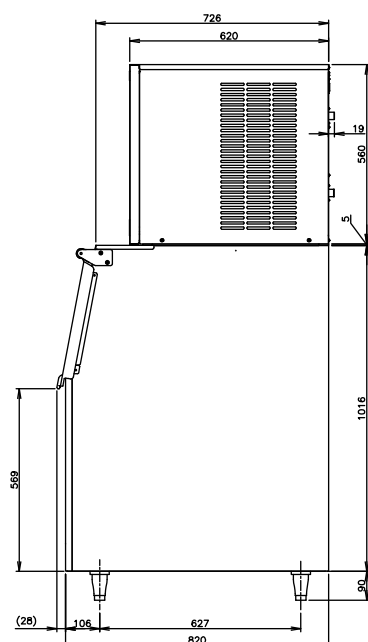

BACK SIDE

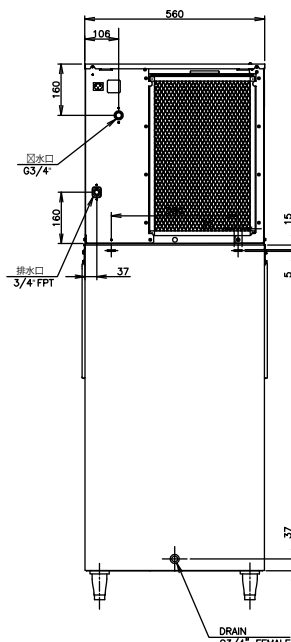

FRONT SIDE

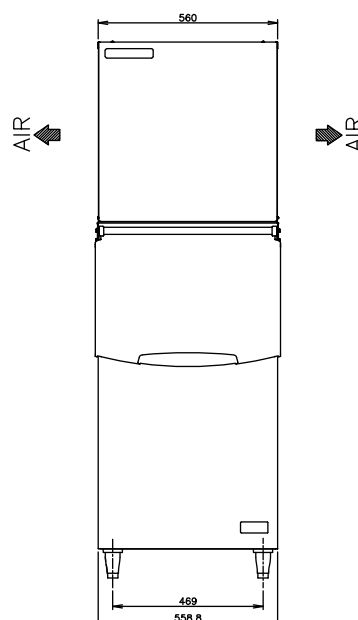

SPECIFICATIONS

Ice Dimensions (W x D x H)	22 x 22 x 22 mm	Water Consumption per 24H	(AT32°C/WT21°C) 0.14m ³ (1.1 L / kg Ice)
Outside Dimensions (W x D x H)	560 x 820 x 1671(~1701) mm	Ice Production Freeze Cycle Time	(AT21°C/WT15°C) 13.3 min
Package Dimensions (W x D x H)	Ice Maker: Pallet+Carton: 650 x 710 x 750mm Storage Bin: 655 x 924 x 1138 mm	Ice Production per Cycle	(AT21°C/WT15°C) Approx. 1.72kg / 182 pcs
Weight (Net / Gross)	Ice Maker: 50kg / 66.5kg Storage Bin: 37kg / 49kg	OPERATING CONDITIONS	
Amperage / Starting Amperage	5.6A / 22A	Voltage Range	198 - 242 V
Electrical Consumption	(AT32°C / WT21°C) 835W	Ambient Temperature	5 - 38°C
Refrigerant Charge	R404A/450g	Water Supply	5 - 32°C
Ice Storage Capacity	Maximum 144 kg	Water Supply Pressure	0.07 - 0.55 Mpa (0.7 - 5.5 bar)
Ice Production per 24H	(AT10°C / WT10°C) Approx. 201 kg (AT21°C / WT15°C) Approx. 174 kg (AT32°C / WT21°C) Approx. 130 kg	Supply Voltage	1/220 - 240V / 50Hz



HOSHIZAKI

HOSHIZAKI MALAYSIA SDN. BHD.

16, JALAN TP5A, Prestij 16, Taman Perindustrian Uep, 47620, Subang Jaya, Selangor, Malaysia.
TEL +603-8023 5823 ht tps://hoshizaki.com.my/