

CERTIFICATION




# ICE MATE

by  **HOSHIZAKI**

## SRM-200AB -14-B-301SA ICE MAKER

**HALF DICE**



ICEMATE is committed to bringing high-efficiency / energy-saving, and high quality ice-making product to people who have dreams and desire to create their own business with the best scientific technology and manufacturing technology.

### KEY FEATURES

#### SAFETY AND HYGIENE ASSURED ICE MACHINE

##### AUTO-CLEANING

Timely maintenance of water system can extend life of equipment.



##### PURE ICE


Overflow self-cleaning function, ensuring ice hygiene



##### IoT



#### Slow melt Dilution



**Slow Dilution**  
Slower melting speed due to -7°C of inside temp of ice cube


#### Powerful Ice Making




#### Energy & Water Saving, Quiet Operation



## DIMENSIONS

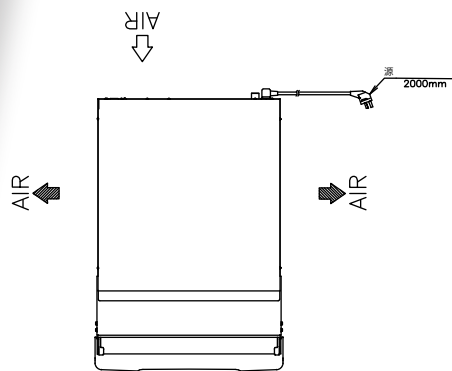




**BIN TOP VIEW**



**RIGHT SIDE**

**BACK SIDE**

**FRONT SIDE**

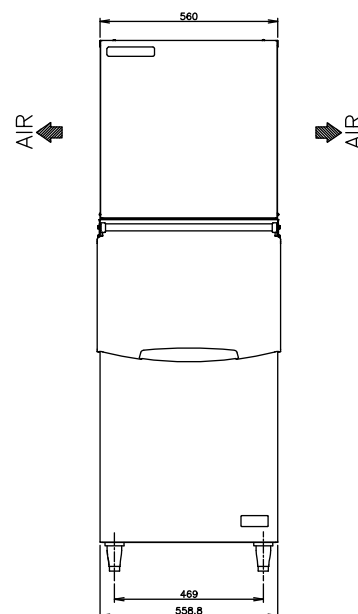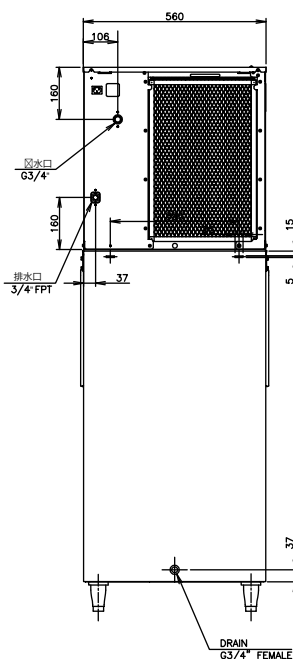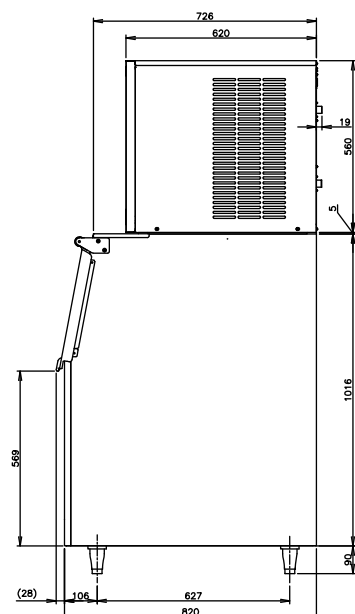

## SPECIFICATIONS

|                                |  |
|--------------------------------|--|
| Ice Dimensions (W x D x H)     | 29 x 14 x 22 mm  |
| Outside Dimensions (W x D x H) | 560 x 820 x 1671(~1701)mm  |
| Package Dimensions (W x D x H) | Ice Maker: Pallet+Carton: 650 x 710 x 750mm<br>Storage Bin: 655 x 924 x 1138mm                           |
| Weight (Net / Gross)           | Ice Maker: 50kg / 66.5kg<br>Storage Bin: 37kg / 49kg   |
| Amperage / Starting Amperage   | 5.09A / 22A  |
| Electrical Consumption         | (AT32°C / WT21°C) 804W   |
| Refrigerant Charge             | R404A/480g   |
| Ice Storage Capacity           | Maximum 144 kg   |
| Ice Production per 24H         | (AT10°C / WT10°C) Approx. 204 kg<br>(AT21°C / WT15°C) Approx. 180 kg<br>(AT32°C / WT21°C) Approx. 140 kg |

|                                  |   |
|----------------------------------|---|
| Water Consumption per 24H        | (AT32°C/WT21°C) 0.15m <sup>3</sup> (1.1 L / kg Ice) |
| Ice Production Freeze Cycle Time | (AT21°C/WT15°C) 14.3 min                            |
| Ice Production per Cycle         | (AT21°C/WT15°C) Approx. 1.8kg / 220 pcs             |

### OPERATING CONDITIONS

|                       |                                 |
|-----------------------|---------------------------------|
| Voltage Range         | 198 - 242 V                     |
| Ambient Temperature   | 5 - 38°C                        |
| Water Supply          | 5 - 32°C                        |
| Water Supply Pressure | 0.07 - 0.55 Mpa (0.7 - 5.5 bar) |
| Supply Voltage        | 1/220 - 240V / 50Hz             |



**HOSHIZAKI**

**HOSHIZAKI VIETNAM CORPORATION**

168/14 Nguyen Gia Tri Street, Ward 25,  
Binh Thanh District, Ho Chi Minh City, 760000 Vietnam  
TEL +84 0 916 161 346 ht tps://hoshizaki-sea.com/