

CERTIFICATION





DCM-80LS-P-HC 🌗 **ICE & WATER DISPENSER**

Kev Features



Eco-friendly Refrigerant

HOSHIZAKI





Perfect fit There are no exhaust outlet on the left and right sides and the back, so it can be placed close to the wall.



Easy for maintenance Notify when parts should be replaced



Draining board can be removed




No need to hold the bucket with your hands when removing ice

Hoshizaki DCM series are ice/water dispensers producing high-quality servings of cubelet ice and/or water. The three steps of quality ice production, protected ice storage, as well as guick service of ice are all combined in one device - with the help of only one button your refreshment is ready in seconds. With DCM DISPENSERS the user can select from these options:

- Cubelet ice only
- Cubelet ice and water
- Water only

Dimensions & Specifications

TOP

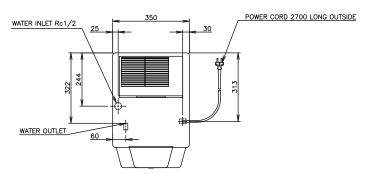


ICE SHAPE

Cubelet


Compressed Flake Ice



FRONT



RIGHT SIDE



MODEL		DCM-80LS-P-HC
ICE SHAPE		Cubelet (Compressed Flake Ice)
POWER SUPPLY		1 Phase 220-240V 50Hz Capacity: 0.48kVA (2.1A)
AMPERAGE		1.7A Starting: 8.3A
ELECTRIC CONSUMPTION		290W
HEAT REJECTION	(AT32°C / WT21°C)	620W
ICE PRODUCTION PER 24H	(AT10°C / WT10°C)	Approx. 80kg
	(AT21°C / WT15°C)	Approx. 65kg
	(AT32°C / WT21°C)	Approx. 50kg
ICE DISPENSING RATE (40G / CUP)	(AT10°C / WT10°C)	Approx. 130 cups/h
	(AT21°C / WT15°C)	Approx. 115 cups/h
	(AT32°C / WT21°C)	Approx. 99 cups/h
STORAGE CAPACITY		Approx. 1.9kg
WATER CONSUMPTION PER 24H	(AT32°C / WT21°C)	50 L
REFRIGERANT		R290
OUTSIDE DIMENSIONS		Carton: 350mm (W) x 525mm (D) x 695(~710)mm(H)
PACKAGE		Carton: 400mm (W) x 581mm (D) x 749mm(H)
WEIGHT		41kg (Gross: 44kg)
OPERATING CONDITIONS		Ambient Temp.: 5-40℃, Water Supply Temp.: 5-35℃,
		Water Supply Pressure: 0.05-0.78MPa
		Voltage Range: Rated Voltage ±6%



HOSHIZAKI VIETNAM CORPORATION

168/14 Nguyen Gia Tri Street, Ward 25, Binh Thanh District, Ho Chi Minh City, 760000 TEL +84 0 916 161 346 https://hoshizaki-sea.com/

