# HOSHIZAKI



## > FM-600AKE

daily ice production capacity of up to 600KG



# > FM-600AKE-N

daily ice production capacity of up to 530KG





Apart from drinks, ice is important for preservation. Hoshizaki's FM ice machines produce flakes that are 70% ice and 30% water and are primarily used for cooling purposes. It is also used in large facilities such in as healthcare, catering, supermarket chains or even cocktail bars.

### **FEATURES**

- > Auger is made of doublehardened stainless > 100% hfc free CO2 foam insulation steel. Combined with carbon bearings, they work optimally in a toughand wet environment. Benefits include longer product life expectancy and reduced maintenance costs.
  - maintains consistent temperature
  - > smart computer board technology
  - > stainless steel exterior
  - > led error indicator for easy diagnosis

### **UNIQUE ICE PRODUCTION SYSTEM**



















# DIMENSIONS & SPECIFICATION




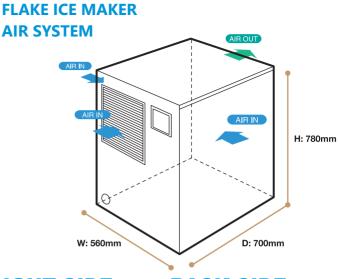



### **FRONT SIDE**

### **RIGHT SIDE**

**BACK SIDE** 

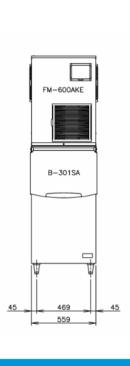

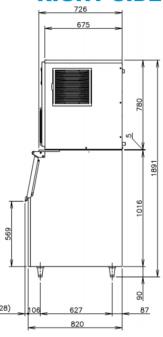

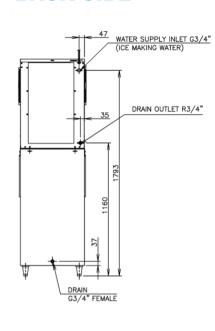

MODEL NAME		FM-600AKE	FM-600AKE-N
ICE SHAPE		Flake	Nugget
DIMENSIONS (MM) (W x D x H)		560 x 700 x 780	
PACKED DIMENSIONS (MM) (W x D x H)		671 x 820 x 971	
WEIGHT (NETT/GROSS)		107 KG / 114 KG	
AMPERAGE / STARTING AMPERAGE		10.5A / 76A	10.8A / 76A
ELECTRICAL CONSUMPTION		1900 W	1950 W
REFRIGERANT CHARGE		R404A	
HEAT REJECTION		3950 W (3396 kcal/h)	3700 W (3181 kcal/h)
ICE PRODUCTION PER 24H	(AT10C/WT10C)	600 KG	530 KG
	(AT21C/WT15C)	540 KG	460 KG
	(AT32C/WT21C)	445 KG	400 KG
WATER CONSUMPTION PER 24H (AT32C/WT21C)		0.48 m <sup>3</sup>	0.43 m <sup>3</sup>
		1.07L / 1KG ICE	1.07 L / 1KG ICE

**OPERATING CONDITIONS:** • *Voltage Range: 198V-254V* • *Ambient Temperature: 5 °-40 °C* • *Water Supply: 5 °-35 °C / 0.05-0.8 Mpa / 7.25-116 PSI* • *AC Supply Voltage: 1/220-240V / 50 Hz*