



HOSHIZAKI

CUBE ICE MAKER SERIES

> IM-65NE-LM

Daily ice production capacity up to **40KG**

> IM-65NE-LM103

Daily ice production capacity up to **39KG**

Cube ice is perfectly symmetrical and leaves a good impression with its hard, crystal clear quality that melts very slowly; allowing customers to enjoy their favourite drink longer. The IM series allows more flexibility of application with each range offering ice in variable sizes alongside a design for uncomplicated usage from start to finish.




FEATURES

- > smart computer board technology
- > slide-in air filter for easy cleaning
- > LED error indicator for easy diagnosis
- > stainless steel exterior provides a hygienic and high quality finish




UNIQUE ICE PRODUCTION SYSTEM

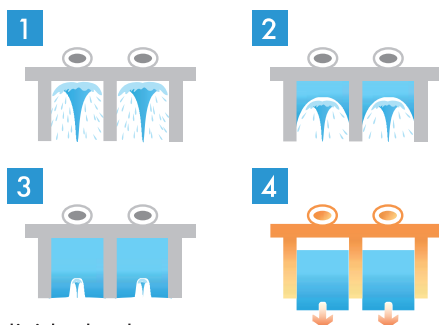


- > Individual cube
- > Impurity free
- > Hardest ice to enjoy slow melting and dilution of drinks

ICE SIZE

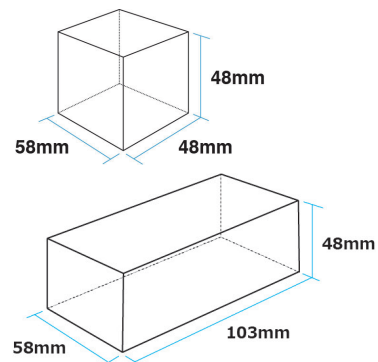


DIMENSION & SPECIFICATION


TOP SIDE

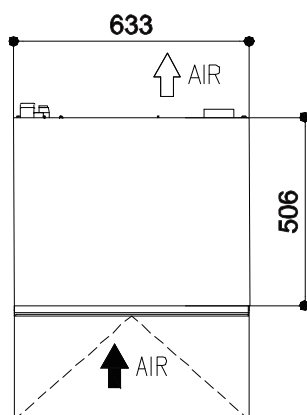


CUBE ICE MAKER AIR SYSTEM

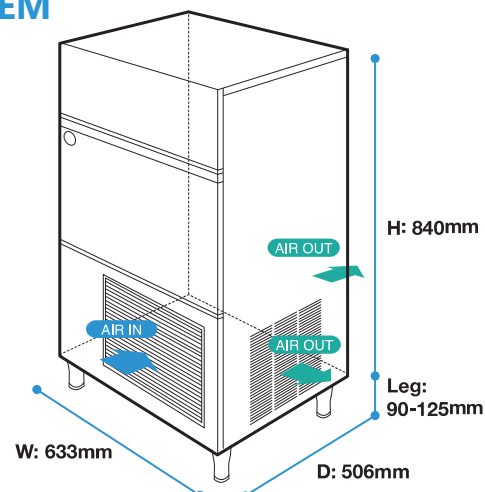

FRONT SIDE

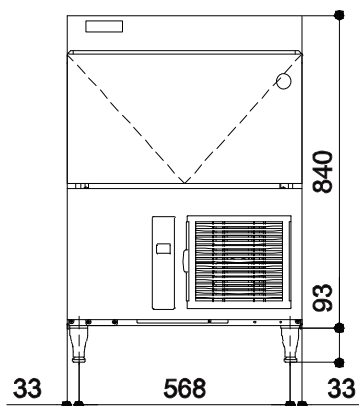

RIGHT SIDE

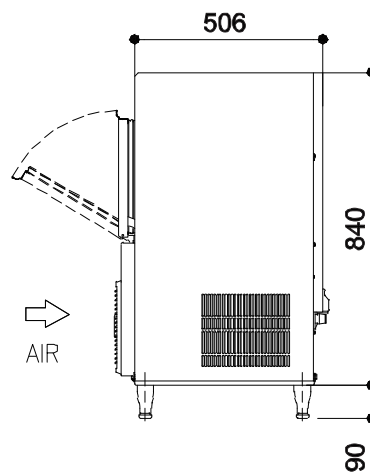

MODEL NAME		IM-65NE-LM	IM-65NE-LM103
ICE DIMENSIONS (MM) (W x D x H)		48 x 48 x 58	48 x 48 x 58
DIMENSIONS (MM) (W x D x H)		Body : 633 x 506 x 860 / Leg Height : 90 - 125mm	
PACKED DIMENSIONS (MM) (W x D x H)		735 x 570 x 1012	
WEIGHT (NETT/GROSS)		53 KG / 61 KG	
AMPERAGE / STARTING AMPERAGE		2.5 A / 15 A	
ELECTRICAL CONSUMPTION		400 W	
REFRIGERANT CHARGE		R134a	
HEAT REJECTION (AT32°C/WT21°C)		800 W (690 kcal/h)	
ICE PRODUCTION PER 24H (10MM)	(AT10°C/WT10°C)	40 KG	32 KG
	(AT21°C/WT15°C)	33 KG	28 KG
	(AT32°C/WT21°C)	25 KG	23 KG
WATER CONSUMPTION PER 24H (AT32°C/WT21°C)		0.06 m ³	0.06 m ³
		2.4 L / 1KG ICE	2.6 L / 1 KG ICE
ICE PRODUCTION (AT32°C/WT21°C)	FREEZE CYCLE TIME	62 MIN	71 MIN
	PER CYCLE	1.44 KG / 12 PCS	1.44 KG / 6 PCS
STORAGE CAPACITY		26 KG	26 KG

WARRANTY:

Two years parts & labour for entire unit, 3rd year on compressor only. Excluding door & exterior damages

OPERATING CONDITIONS: • Voltage Range: 198V-254V • Ambient Temperature: 1°-40°C

• Water Supply: 5°-35°C / 0.07-0.8 Mpa / 7.25-116 PSI • AC Supply Voltage: 1/220-240V / 50 Hz

***60Hz units are available upon request**