



HOSHIZAKI

CERTIFICATION



HACCP International




ISO9001

HF-128MA-S UPRIGHT FREEZER



Key Features



**Forced Evaporation
System**




**LED Interior
Lighting**

Our A-fit cabinet combines functionality and excellent energy performance to meet Japan quality level with precise temperature control to ensure food ingredient freshness at all time.







Dimensions & Specifications

POWER CORD 2300 LONG OUTSIDE
(UK PLUG WITH EARTH WIRE)

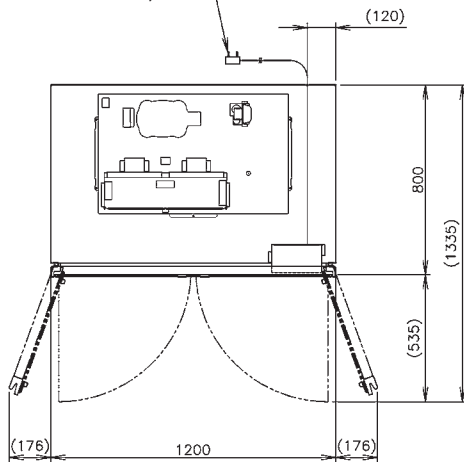

COATING SHELF(527x627) DRAIN OUTLET 18 OD
(DEFROST)

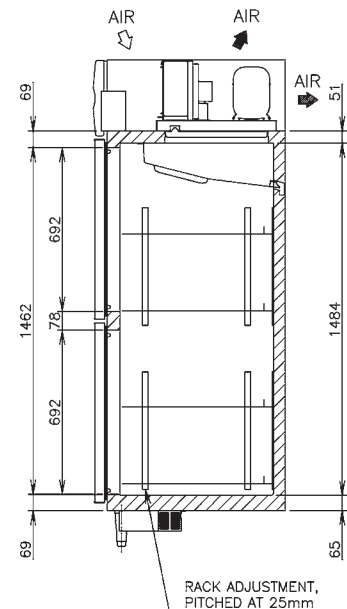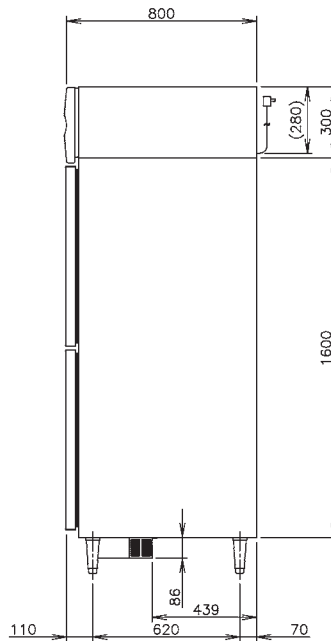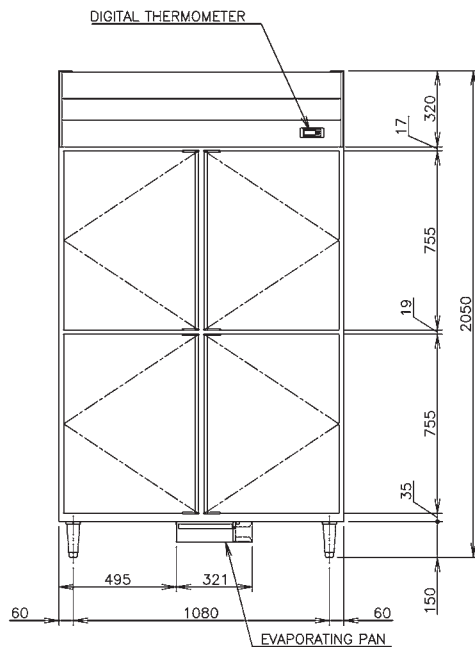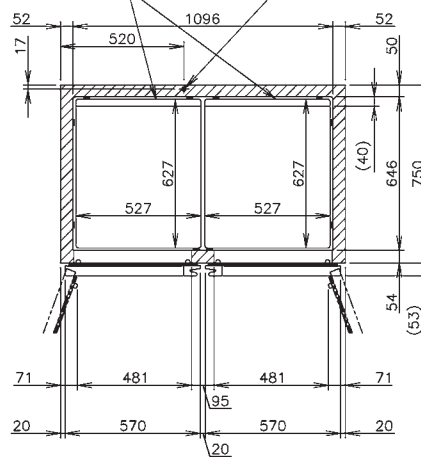

MODEL	HF-128MA-S
POWER SUPPLY	1 Phase 220-240V 50Hz Capacity: 1.02kVA (4.64A)
ELECTRIC CONSUMPTION	700W Heater: 474W Defrost: 250W
TEMPERATURE CONTROL	Microprocessor (Digital Temp. Indication) Adjustable from - 23 to -7°C
EFFECTIVE CAPACITY	1047L
WEIGHT	Net: 152kg (Gross 183kg)
OUTSIDE DIMENSIONS	1200mm(W)× 800mm(D)×2050(-2080)mm(H)
PACKAGE	Carton: (wooden box) 1260mm(W)×900mm(D)×2075mm(H)
AMPERAGE	Rated: 5.6A Starting: 15.6A
SHELF	8 pcs
OPERATING CONDITIONS	Ambient Temperature: 5 - 43°C, Voltage Range: Rated Voltage ±6%



HOSHIZAKI

HOSHIZAKI MALAYSIA SDN. BHD.

16, JALAN TP5A, Prestij 16,
Taman Perindustrian Uep, 47620 Subang Jaya, Selangor
TEL +603-8023 5823 <https://hoshizaki.com.my/>

