



HOSHIZAKI

CERTIFICATION



HACCP International




ISO9001

HR-148MA-S UPRIGHT BAKERY REFRIGERATOR




Key Features



**Forced Evaporation
System**



**LED Interior
Lighting**









**Sheet Pan (W400 x
D600) max. 23 tiers**
(SHEET PANS are not
included)

Our A-fit cabinet combines functionality and excellent energy performance to meet Japan quality level with precise temperature control to ensure food ingredient freshness at all time.



Dimensions & Specifications

POWER CORD 2300 LONG OUTSIDE
(UK PLUG WITH EARTH WIRE)

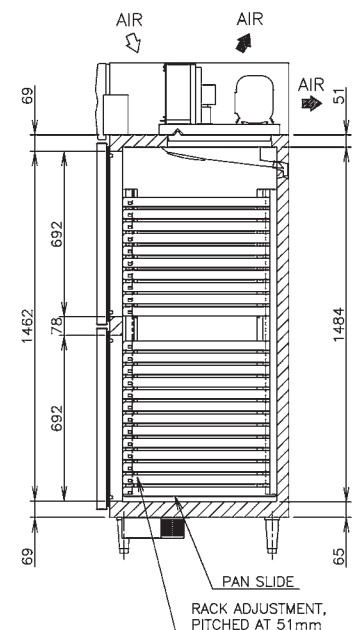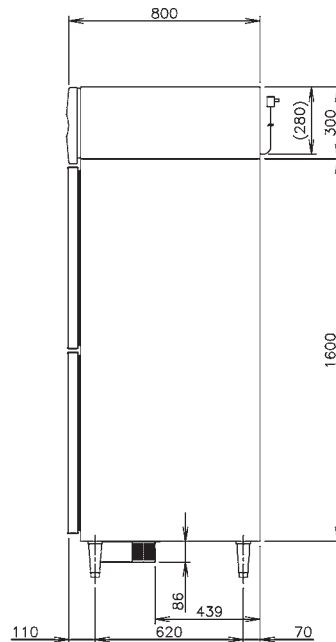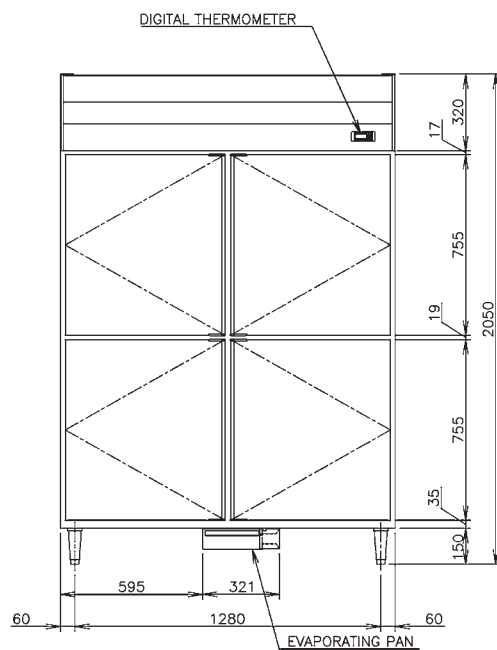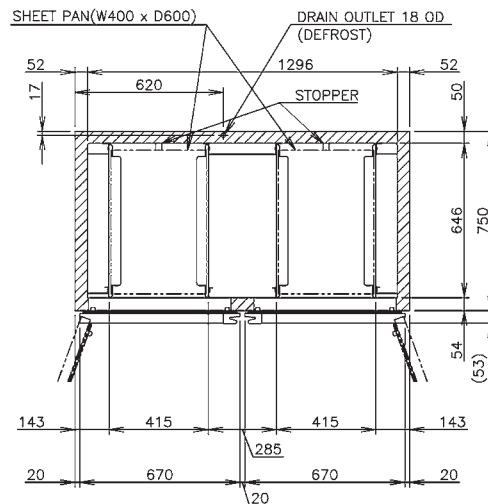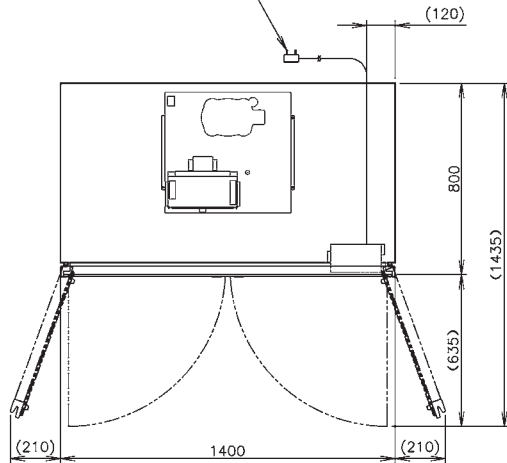

MODEL	HR-148MA-S
POWER SUPPLY	1 Phase 220-240V 50Hz Capacity: 0.72kVA (3.3A)
ELECTRIC CONSUMPTION	343W Heater: 162W Defrost: 162W
TEMPERATURE CONTROL	Microprocessor Adjustable from - 2 to 12°C
EFFECTIVE CAPACITY	1217L
WEIGHT	163kg (Gross 197kg)
OUTSIDE DIMENSIONS	1400mm(W)× 800mm(D)×2050(-2080)mm(H)
PACKAGE	Carton (wooden pallet) 1460mm(W)×900mm(D)×2075mm(H)
AMPERAGE	Rated: 3.6A Starting: 12A
OPERATING CONDITIONS	Ambient Temperature: 5 - 43°C, Voltage Range: Rated Voltage ±6%



HOSHIZAKI

HOSHIZAKI MALAYSIA SDN. BHD.

16, JALAN TP5A, Prestij 16,
Taman Perindustrian Uep, 47620 Subang Jaya, Selangor
TEL +603-8023 5823 <https://hoshizaki.com.my/>

