



# HOSHIZAKI

## CERTIFICATION



HACCP International




ISO9001

## HR-148MA-S UPRIGHT BAKERY REFRIGERATOR




### Key Features



**Forced Evaporation  
System**



**LED Interior  
Lighting**









**Sheet Pan (W400 x  
D600) max. 23 tiers**  
(SHEET PANS are not  
included)

Our A-fit cabinet combines functionality and excellent energy performance to meet Japan quality level with precise temperature control to ensure food ingredient freshness at all time.



## Dimensions & Specifications

POWER CORD 2300 LONG OUTSIDE  
(UK PLUG WITH EARTH WIRE)

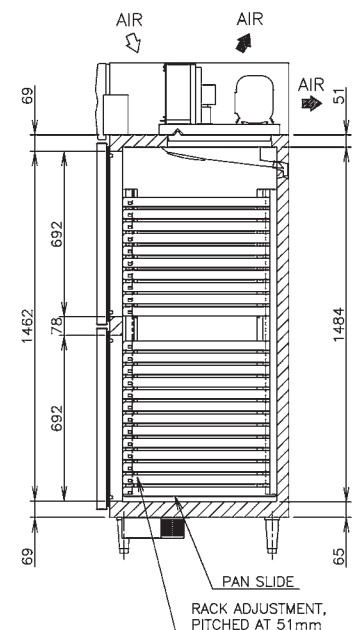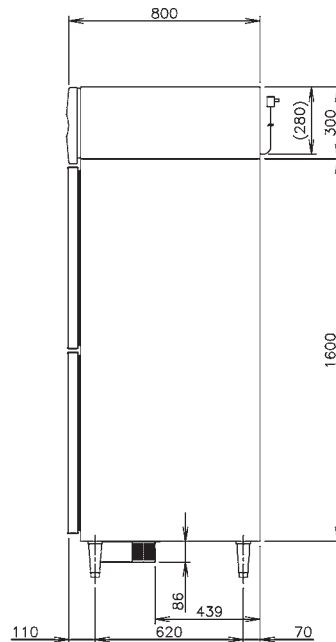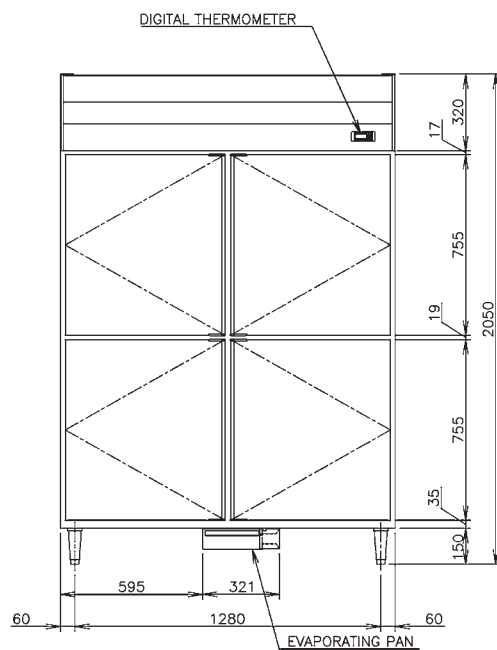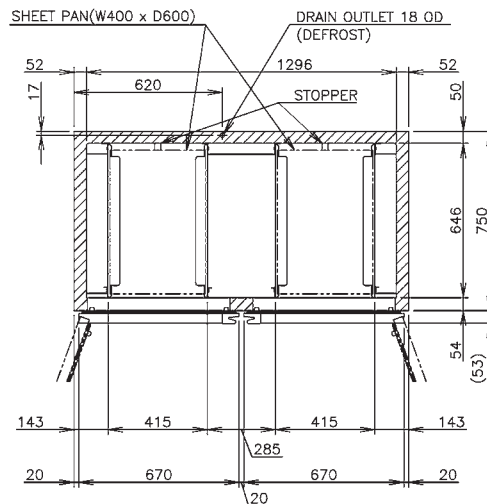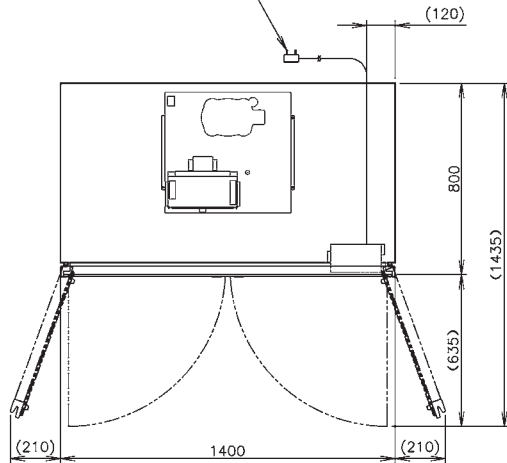

| MODEL                | HR-148MA-S                                                      |
|----------------------|-----------------------------------------------------------------|
| POWER SUPPLY         | 1 Phase 220-240V 50Hz Capacity: 0.72kVA (3.3A)                  |
| ELECTRIC CONSUMPTION | 343W Heater: 162W Defrost: 162W                                 |
| TEMPERATURE CONTROL  | Microprocessor Adjustable from - 2 to 12°C                      |
| EFFECTIVE CAPACITY   | 1217L                                                           |
| WEIGHT               | 163kg (Gross 197kg)                                             |
| OUTSIDE DIMENSIONS   | 1400mm(W)× 800mm(D)×2050(-2080)mm(H)                            |
| PACKAGE              | Carton (wooden pallet) 1460mm(W)×900mm(D)×2075mm(H)             |
| AMPERAGE             | Rated: 3.6A Starting: 12A                                       |
| OPERATING CONDITIONS | Ambient Temperature: 5 - 43°C, Voltage Range: Rated Voltage ±6% |



# HOSHIZAKI

**HOSHIZAKI VIETNAM CORPORATION**

168/14 Nguyen Gia Tri Street,  
Ward 25, Binh Thanh District, Ho Chi Minh City, 760000  
TEL +84 0 916 161 346 <https://hoshizaki-sea.com/>

