



HOSHIZAKI

CERTIFICATION



HACCP International



ISO9002

HR-78MA-S UPRIGHT REFRIGERATOR



Key Features



**Forced Evaporation
System**




**LED Interior
Lighting**

Our A-fit cabinet combines functionality and excellent energy performance to meet Japan quality level with precise temperature control to ensure food ingredient freshness at all time.



Dimensions & Specifications

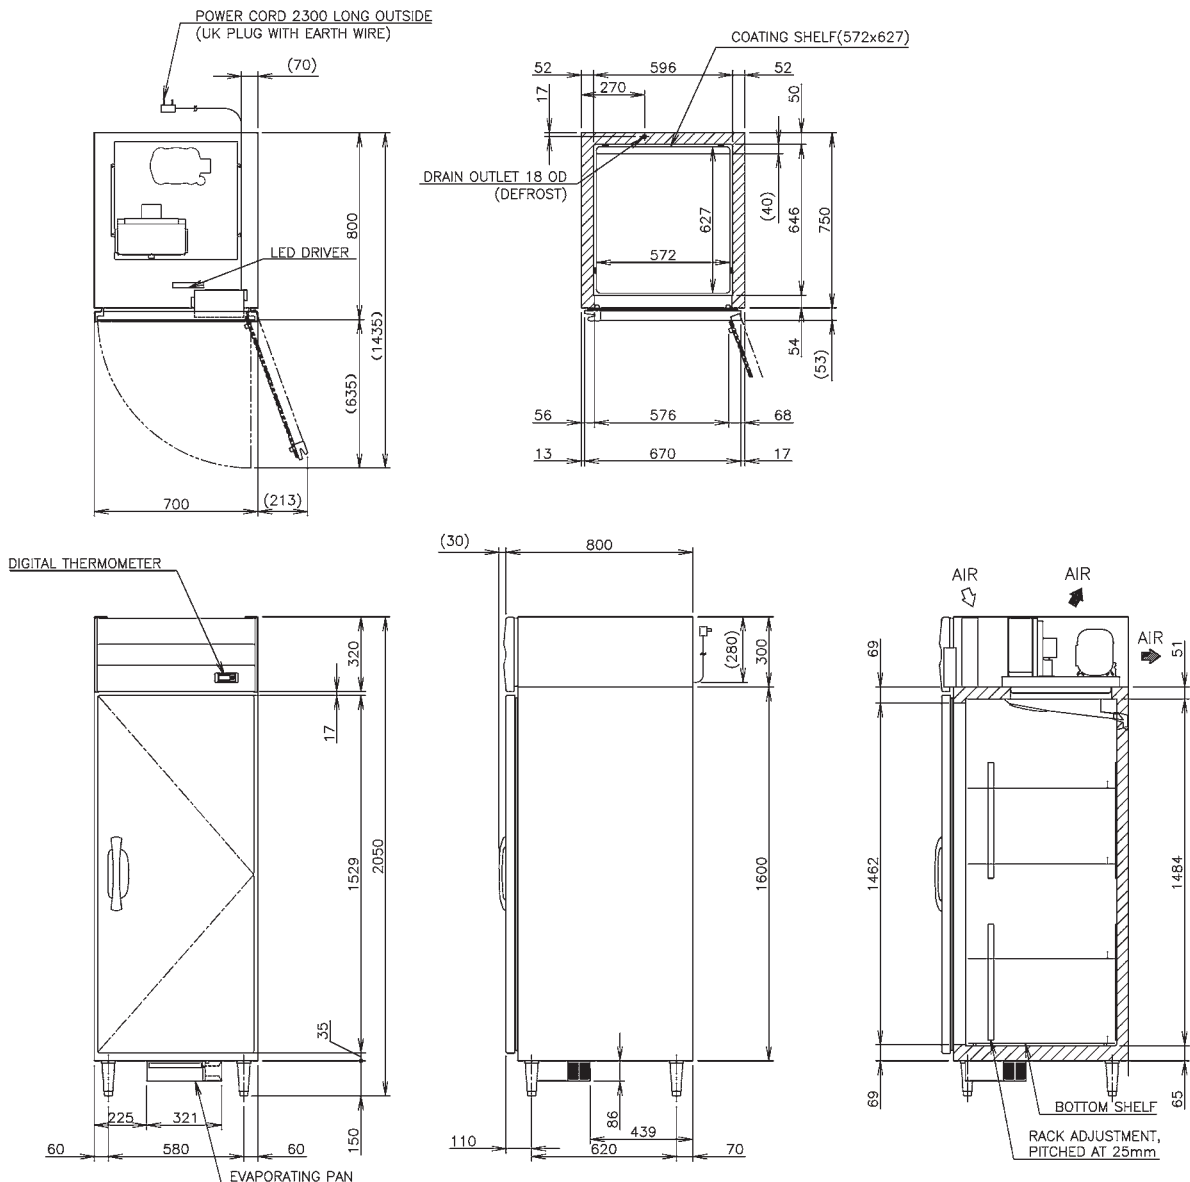

MODEL	HR-78MA-S
POWER SUPPLY	1 Phase 220-240V 50Hz Capacity: 0.74kVA (3.36A)
ELECTRIC CONSUMPTION	238W Heater: 393W Defrost: 250W
TEMPERATURE CONTROL	Microprocessor (Digital Temp. Indication) Adjustable from - 6 to 12°C
EFFECTIVE CAPACITY	569L
WEIGHT	Net: 102kg (Gross 124kg)
OUTSIDE DIMENSIONS	700mm(W)× 800mm(D)×2050(-2080)mm(H)
PACKAGE	Carton: (wooden box) 760mm(W)×900mm(D)×2075mm(H)
AMPERAGE	Rated: 2.7A Starting: 11.3A
SHELF	4 pcs
OPERATING CONDITIONS	Ambient Temperature: 5 - 43°C, Voltage Range: Rated Voltage ±6%



HOSHIZAKI

HOSHIZAKI (THAILAND) LIMITED

No. 99 CP Tower North Park building 9th Floor, Zone D1, Soi Ngamwongwan 47
Intersection 42, Thung Song Hong, Subdistrict, Lak Si District, Bangkok 10210

TEL +66 2 005 9980 FAX +66 2 516 2646 <https://hoshizaki.co.th/en/>

