

CERTIFICATION





ISO9001

RT-126MA-SSG

UNDERCOUNTER SLIDNG GLASS DOOR REFRIGERATOR




Key Features





Our A-fit cabinet combines functionality and excellent energy performance to meet Japan quality level with precise temperature control to ensure food ingredient freshness at all time.

Dimensions & Specifications

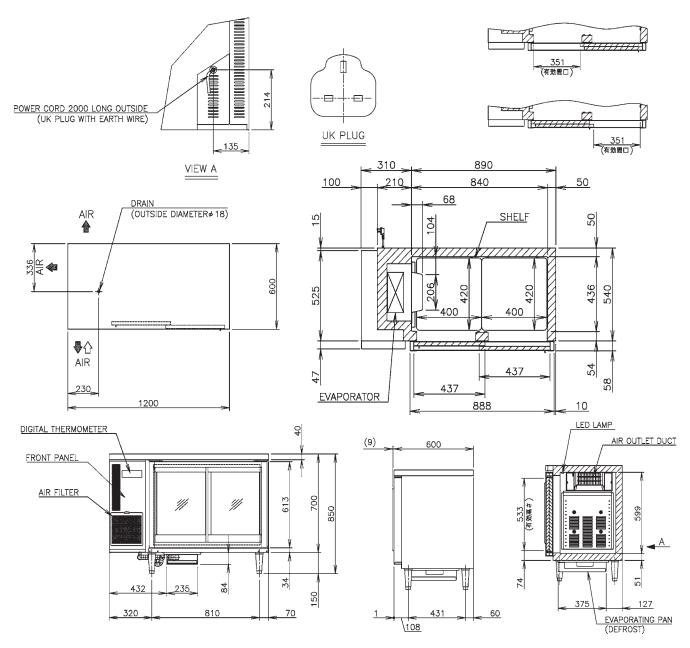

MODEL	RT-126MA-SSG
POWER SUPPLY	1 Phase 220-240V 50Hz Capacity: 0.50kVA (2.27A)
ELECTRIC CONSUMPTION	Motor: 238W Heater: 78W Refrigeration: 295W Defrost: 78W
TEMPERATURE CONTROL	Microprocessor (Digital Temp. Indication) Adjustable from -2 to 12° C
EFFECTIVE CAPACITY	231L
WEIGHT	Net: 82kg (Gross: Approx. 87kg)
OUTSIDE DIMENSIONS	1200mm(W)× 600mm(D)×850(-880)mm(H)
PACKAGE	Carton: 1265mm(W)×680mm(D)×790mm(H)
AMPERAGE	Rated: 2.0A
SHELF	4 pcs
OPERATING CONDITIONS	Ambient Temperature: 5 - 38°C, Voltage Range: Rated Voltage ±6%



HOSHIZAKI MALAYSIA SDN. BHD.

16, JALAN TP5A, Prestij 16,

Taman Perindustrian Uep, 47620 Subang Jaya, Selangor TEL +603-8023 5823 https://hoshizaki.com.my/

