

CERTIFICATION





ISO9001

RT-128MA-S-PRS **UNDERCOUNTER PREP TABLE**



Key Features








Our A-fit cabinet combines functionality and excellent energy performance to meet Japan quality level with precise temperature control to ensure food ingredient freshness at all time.

Dimensions & Specifications

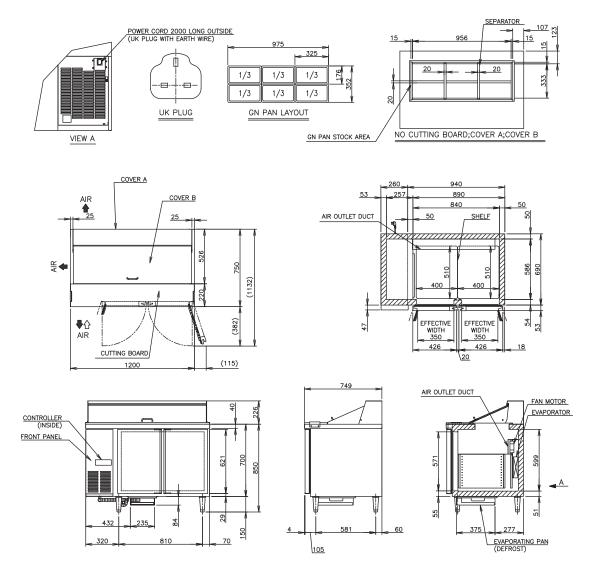

MODEL	RT-128MA-S-PRS
POWER SUPPLY	1 Phase 220-240V 50Hz Capacity: 0.6kVA (2.6A)
ELECTRIC CONSUMPTION	Heater: 78W, Defrost: 78W
TEMPERATURE CONTROL	Microprocessor (Digital Temp. Indication) Adjustable from -6 to 12° C
EFFECTIVE CAPACITY	304L
WEIGHT	Net: 75kg (Gross: Approx 80kg)
OUTSIDE DIMENSIONS	1200mm(W)× 750mm(D)×1076(-1106)mm(H)
PACKAGE	Carton: 1265mm(W)×830mm(D)×1015mm(H)
AMPERAGE	Rated: 2.1A
SHELF	4 pcs
OPERATING CONDITIONS	Ambient Temperature: 5 - 38°C, Voltage Range: Rated Voltage ±6%



HOSHIZAKI (THAILAND) LIMITED

No. 99 CP Tower North Park building 9th Floor, Zone D1, Soi Ngamwongwan 47 Intersection 42, Thung Song Hong, Subdistrict, Lak Si District, Bangkok 10210 TEL +66 2 005 9980 FAX +66 2 516 2646 https://hoshizaki.co.th/en/

