

CERTIFICATION





ISO9001

RT-128MA-SG

UNDERCOUNTER SWING GLASS DOOR REFRIGERATOR



Key Features




Forced Evaporation System








Our A-fit cabinet combines functionality and excellent energy performance to meet Japan quality level with precise temperature control to ensure food ingredient freshness at all time.


Dimensions & Specifications

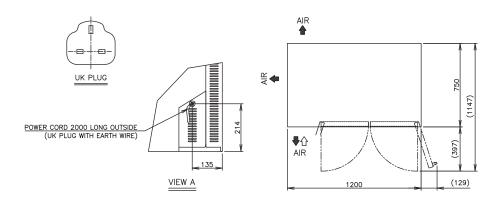









| MODEL | RT-128MA-SG |
|----------------------|---|
| POWER SUPPLY | 1 Phase 230V 50Hz Capacity: 0.5kVA (2.5A) |
| ELECTRIC CONSUMPTION | Heater: 224W, Defrost: 165W |
| TEMPERATURE CONTROL | Microprocessor (Digital Temp. Indication) Adjustable from -2 to 12° C |
| EFFECTIVE CAPACITY | 307L |
| WEIGHT | Net: 91kg (Gross: Approx. 101kg) |
| OUTSIDE DIMENSIONS | 1200mm(W)× 750mm(D)×850(-880)mm(H) |
| PACKAGE | Carton: 1265mm(W)×830mm(D)×790mm(H) |
| AMPERAGE | Rated: 2.3A |
| SHELF | 4 pcs |
| OPERATING CONDITIONS | Ambient Temperature: 5 - 38°C, Voltage Range: Rated Voltage ±6% |



HOSHIZAKI MALAYSIA SDN. BHD.

16, JALAN TP5A, Prestij 16, Taman Perindustrian Uep, 47620 Subang Jaya, Selangor TEL +603-8023 5823 https://hoshizaki.com.my/

