

CERTIFICATION





RT-128MA-SSG

UNDERCOUNTER SLIDNG GLASS DOOR REFRIGERATOR




Key Features





Our A-fit cabinet combines functionality and excellent energy performance to meet Japan quality level with precise temperature control to ensure food ingredient freshness at all time.

Dimensions & Specifications

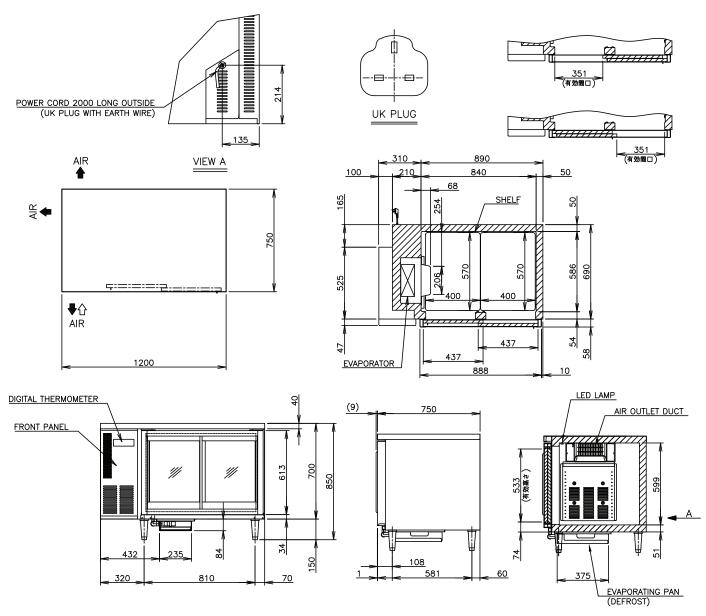

MODEL	RT-128MA-SSG
POWER SUPPLY	1 Phase 230V 50Hz Capacity: 0.50kVA (2.5A)
ELECTRIC CONSUMPTION	Motor: 247W Heater: 187W Refrigeration: 245W Defrost: 165W
TEMPERATURE CONTROL	Microprocessor (Digital Temp. Indication) Adjustable from -2 to 12° C
EFFECTIVE CAPACITY	307L
WEIGHT	Net: 93kg (Gross: Approx. 98kg)
OUTSIDE DIMENSIONS	1200mm(W)× 750mm(D)×850(-880)mm(H)
PACKAGE	Carton: 1265mm(W)×830mm(D)×790mm(H)
AMPERAGE	Rated: 2.4A
SHELF	4 pcs
OPERATING CONDITIONS	Ambient Temperature: 5 - 38°C, Voltage Range: Rated Voltage ±6%



PT. HOSHIZAKI INDONESIA

Kirana Boutique Office Kirana Avenue 2 Blok C2 No. 6 Jl. Raya Boulevard No.1 Kelapa Gading, Jakarta Utara, DKI Jakarta, 14240 TEL +62-21-2937 5551/2 FAX +62 21 2937 5553 https://hoshizaki.co.id/

