HOSHIZAKI

CERTIFICATION

HACCP International

ISO9001

Compliant with
IEC60335-2-89 Standard

RT-128MC-S
UNDERCOUNTER REFRIGERATOR

NATURAL
REFRIGERANTS

Key Features

- Lower running cost
- Strong cooling power
- LED lighting
- Drainage-Free Design
- Large and clear display
- Rounded corner
- Removal door gaskets
- NATURAL REFRIGERANTS

Dimensions & Specifications

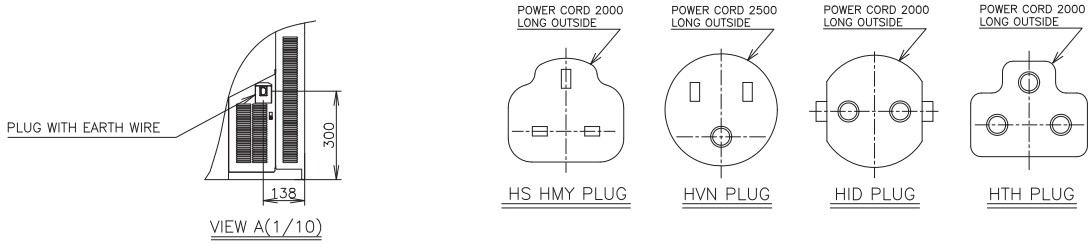

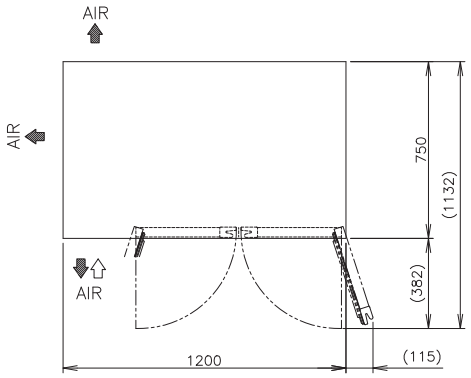

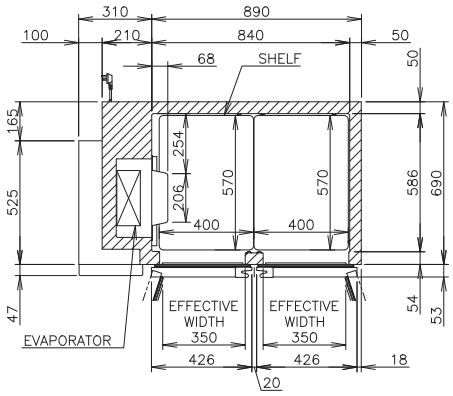

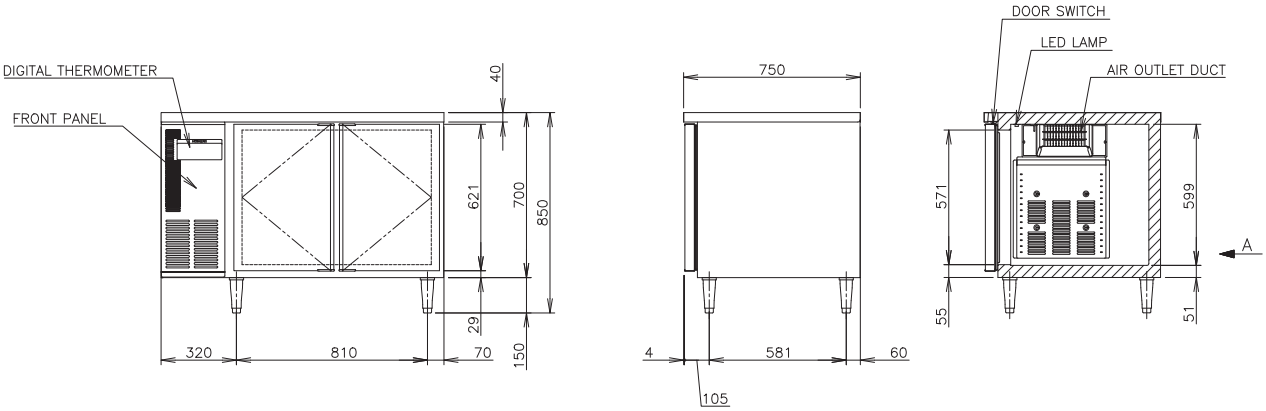

MODEL	RT-128MC-S
POWER SUPPLY	1 Phase 220-240V 50Hz Capacity: 0.41kVA (1.86A)
ELECTRIC CONSUMPTION	2.07kWh/day
TEMPERATURE CONTROL	-6 to 12°C
STORAGE CAPACITY	307L
WEIGHT	Net: 80kg (Gross: Approx. 92kg)
OUTSIDE DIMENSIONS	1200mm(W)× 750mm(D)×850(-880)mm(H)
PACKAGE	Carton: 1265mm(W)×830mm(D)×845mm(H)
NUMBER OF SHELVES	4pcs
REFRIGERANT	R290
OPERATING CONDITIONS	Ambient Temperature: 5 - 38°C, Voltage Range: Rated Voltage ±6%

HOSHIZAKI

HOSHIZAKI MALAYSIA SDN. BHD.

No. 12, Jalan Penyajak U1/45B. Hicom-Glenmarie
Industrial Park, 40150 Shah Alam, Selangor
TEL (+60) 3 5569 8023 https://hoshizaki.com.my/