

CERTIFICATION





RT-156MA-SG

UNDERCOUNTER SWING GLASS DOOR REFRIGERATOR



Key Features











Our A-fit cabinet combines functionality and excellent energy performance to meet Japan quality level with precise temperature control to ensure food ingredient freshness at all time.


Dimensions & Specifications

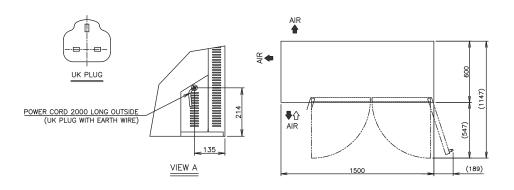









MODEL	RT-156MA-SG
POWER SUPPLY	1 Phase 230V 50Hz Capacity: 0.5kVA (2.5A)
ELECTRIC CONSUMPTION	Heater: 241W, Defrost: 165W
TEMPERATURE CONTROL	Microprocessor (Digital Temp. Indication) Adjustable from -2 to 12° C
EFFECTIVE CAPACITY	318L
WEIGHT	Net: 97kg (Gross: Approx. 107kg)
OUTSIDE DIMENSIONS	1500mm(W)× 600mm(D)×850(-880)mm(H)
PACKAGE	Carton: 1565mm(W)×680mm(D)×790mm(H)
AMPERAGE	Rated: 2.3A
SHELF	4 pcs
OPERATING CONDITIONS	Ambient Temperature: 5 - 38°C, Voltage Range: Rated Voltage ±6%



PT. HOSHIZAKI INDONESIA

Kirana Boutique Office Kirana Avenue 2 Blok C2 No. 6 Jl. Raya Boulevard No.1 Kelapa Gading, Jakarta Utara, DKI Jakarta, 14240 TEL +62-21-2937 5551/2 FAX +62 21 2937 5553 https://hoshizaki.co.id/

