

CERTIFICATION







ISO9001

RT-158MA-PG

UNDERCOUNTER SWING GLASS DOOR REFRIGERATOR



Key Features




Forced Evaporation System






Our A-fit cabinet combines functionality and excellent energy performance to meet Japan quality level with precise temperature control to ensure food ingredient freshness at all time.

Dimensions & Specifications

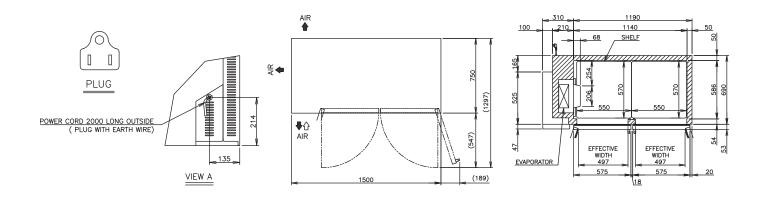

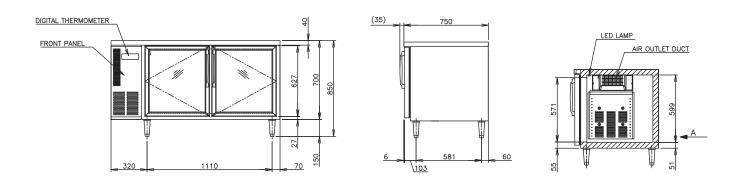

MODEL	RT-158MA-PG
POWER SUPPLY	1 Phase 230V 60Hz Capacity: 0.5kVA (2.5A)
ELECTRIC CONSUMPTION	Heater: 241W, Defrost: 165W
TEMPERATURE CONTROL	Microprocessor (Digital Temp. Indication) Adjustable from -2 to 12° C
EFFECTIVE CAPACITY	420L
WEIGHT	Net: 103kg (Gross: Approx. 113kg)
OUTSIDE DIMENSIONS	1500mm(W)× 750mm(D)×850(-880)mm(H)
PACKAGE	Carton: 1565mm(W)×830mm(D)×790mm(H)
AMPERAGE	Rated: 2.3A
SHELF	4 pcs
OPERATING CONDITIONS	Ambient Temperature: 5 - 38°C, Voltage Range: Rated Voltage ±6%



Unit No. GB-2, G/F Agustin 1 Bldg., # 28 F. Ortigas Center, Pasig City TEL +632 8839 2861 https://hoshizaki-sea.com/

