



HOSHIZAKI

CERTIFICATION



HACCP International




ISO9001

RT-158MA-S UNDERCOUNTER BAKERY REFRIGERATOR




Key Features



**Forced Evaporation
System**



**LED Interior
Lighting**




**Sheet Pan (W400 x
D600) max. 23 tiers**
(SHEET PANS are not
included)

Our A-fit cabinet combines functionality and excellent energy performance to meet Japan quality level with precise temperature control to ensure food ingredient freshness at all time.



Dimensions & Specifications

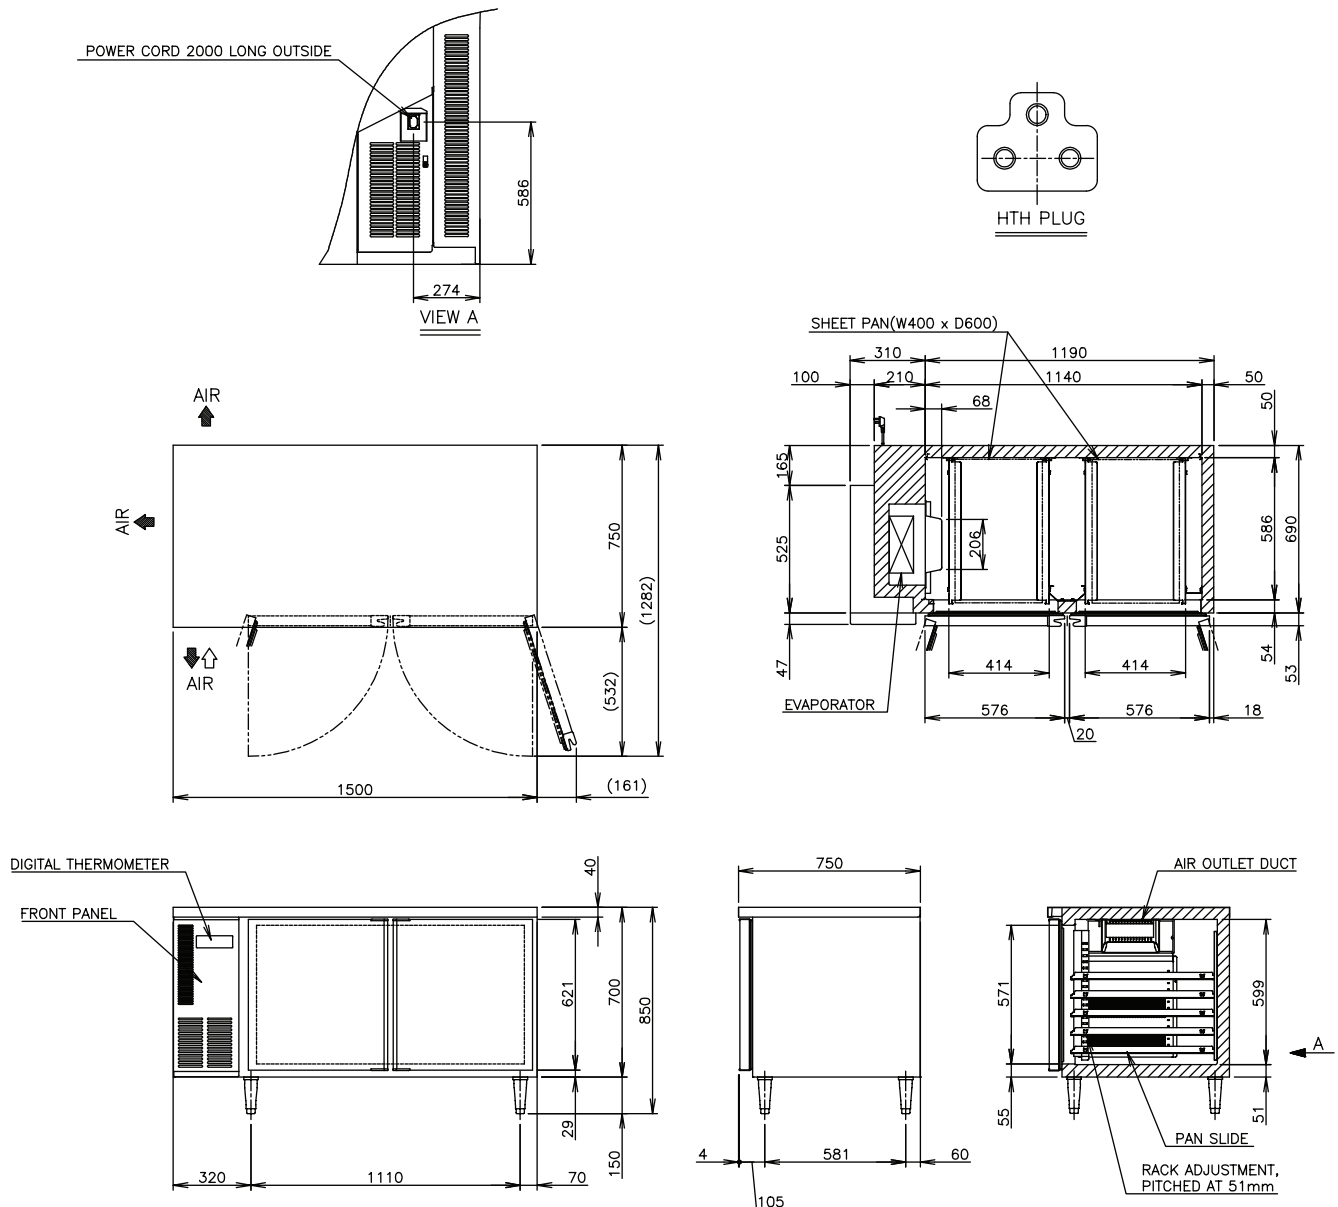

MODEL	RT-158MA-S
POWER SUPPLY	1 Phase 230V 50Hz Capacity: 0.5kVA (2.5A)
ELECTRIC CONSUMPTION	Motor: 260W Heater: 189W Refrigeration: 245W Defrost: 165W
TEMPERATURE CONTROL	Microprocessor Adjustable from -6 to 12°C
EFFECTIVE CAPACITY	420L
WEIGHT	Net: 87 (Gross: Approx. 92kg)
OUTSIDE DIMENSIONS	1500mm(W)× 750mm(D)×850(-880)mm(H)
PACKAGE	Carton 1565mm(W)×830mm(D)×790mm(H)
AMPERAGE	Rated: 2.0A
SHELF	Tray Shelf (5tiers)
OPERATING CONDITIONS	Ambient Temperature: 5 - 38°C, Voltage Range: Rated Voltage ±6%



HOSHIZAKI

PT. HOSHIZAKI INDONESIA

Kirana Boutique Office Kirana Avenue 2 Blok C2 No. 6 Jl. Raya
Boulevard No.1 Kelapa Gading, Jakarta Utara, DKI Jakarta, 14240
TEL +62-21-2937 5551/2 FAX +62 21 2937 5553
<https://hoshizaki.co.id/>

