

CERTIFICATION





RT-158MA-S

UNDERCOUNTER BAKERY REFRIGERATOR



Key Features








Our A-fit cabinet combines functionality and excellent energy performance to meet Japan quality level with precise temperature control to ensure food ingredient freshness at all time.



Dimensions & Specifications

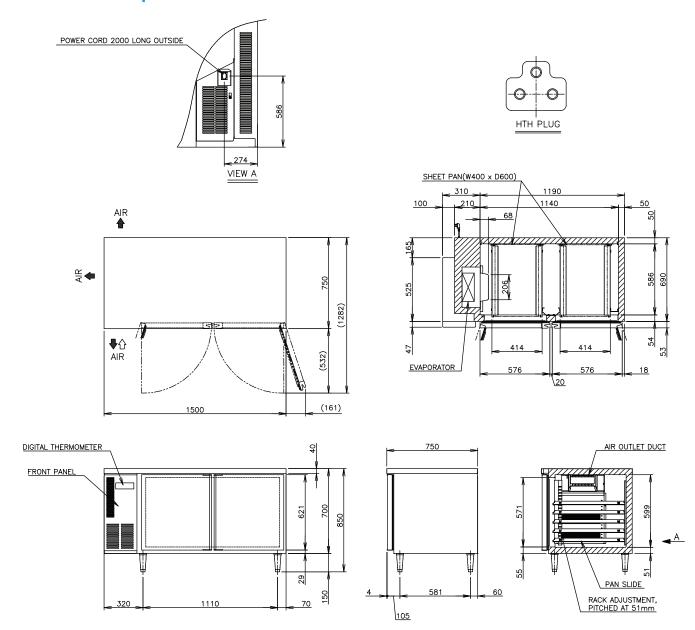

MODEL	RT-158MA-S
POWER SUPPLY	1 Phase 230V 50Hz Capacity: 0.5kVA (2.5A)
ELECTRIC CONSUMPTION	Motor: 260W Heater: 189W Refrigeration: 245W Defrost: 165W
TEMPERATURE CONTROL	Microprocessor Adjustible from -6 to 12°C
EFFECTIVE CAPACITY	420L
WEIGHT	Net: 87 (Gross: Approx. 92kg)
OUTSIDE DIMENSIONS	1500mm(W)× 750mm(D)×850(-880)mm(H)
PACKAGE	Carton 1565mm(W)×830mm(D)×790mm(H)
AMPERAGE	Rated: 2.0A
SHELF	Tray Shelf (5tiers)
OPERATING CONDITIONS	Ambient Temperature: 5 - 38°C, Voltage Range: Rated Voltage ±6%



HOSHIZAKI (THAILAND) LIMITED

No. 99 CP Tower North Park building 9th Floor, Zone D1, Soi Ngamwongwan 47 Intersection 42, Thung Song Hong, Subdistrict, Lak Si District, Bangkok 10210 TEL +66 2 005 9980 FAX +66 2 516 2646 https://hoshizaki.co.th/en/

