

CERTIFICATION





ISO9001

RT-158MA-S-PR **UNDERCOUNTER PREP TABLE**



Key Features








Our A-fit cabinet combines functionality and excellent energy performance to meet Japan quality level with precise temperature control to ensure food ingredient freshness at all time.

Dimensions & Specifications

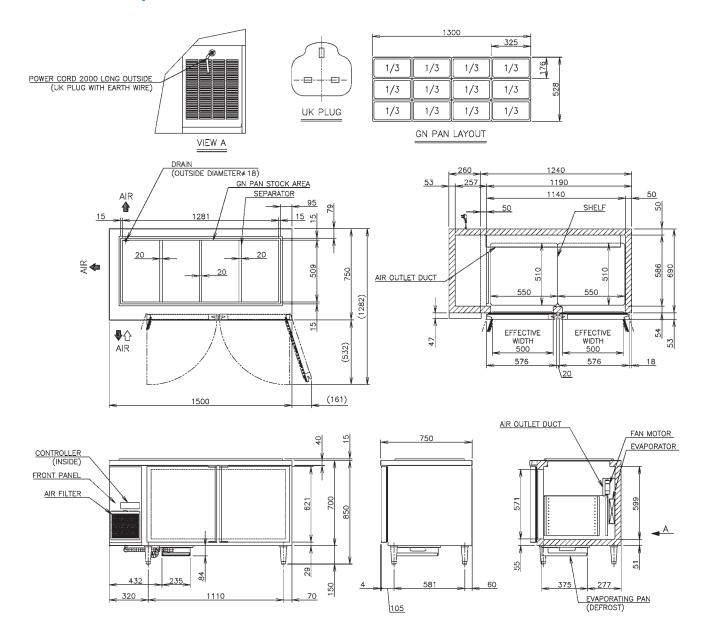

MODEL	RT-158MA-S-PR
POWER SUPPLY	1 Phase 220-240V 50Hz Capacity: 0.78kVA (3.55A)
ELECTRIC CONSUMPTION	Motor: 380W Heater: 141W Refrigeration: 416 Defrost: 141W
TEMPERATURE CONTROL	Microprocessor Adjustible from - 2 to 12°C
EFFECTIVE CAPACITY	410L
WEIGHT	Net: 94kg (Gross: Approx 99kg)
OUTSIDE DIMENSIONS	1500mm(W)× 750mm(D)×850(-880)mm(H)
PACKAGE	Carton: 1565mm(W)×830mm(D)×790mm(H)
AMPERAGE	Rated: 2.5A
SHELF	4 pcs
OPERATING CONDITIONS	Ambient Temperature: 5 - 32°C, Voltage Range: Rated Voltage ±6%



HOSHIZAKI VIETNAM CORPORATION

168/14 Nguyen Gia Tri Street, Ward 25, Binh Thanh District, Ho Chi Minh City, 760000 TEL +84 0 916 161 346 https://hoshizaki-sea.com/

